



## HP Compaq 6200 Pro Small Form Factor Business PC

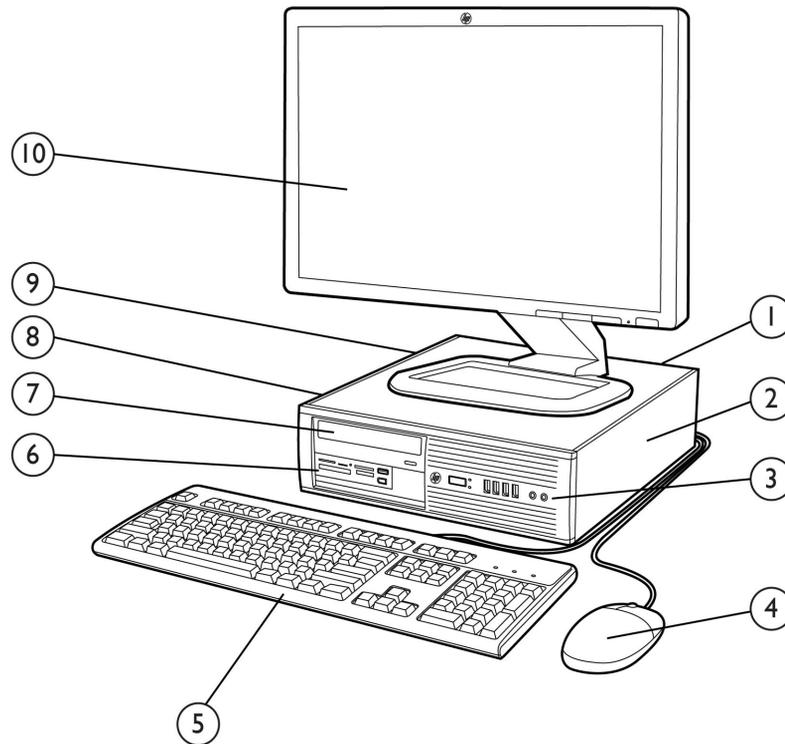

- 1 Rear I/O includes (6) USB 2.0 ports, serial port, PS/2 mouse and keyboard ports, RJ-45 network interface, DisplayPort v1.1a and VGA video interfaces, and 3.5mm audio in/out jacks
- 2 Low profile expansion slots include (1) PCI, (2) PCI Express x1 and (1) PCI Express x16 graphics
- 3 Front I/O includes (4) USB 2.0 ports, dedicated headphone output, and a microphone/headphone jack
- 4 HP Mouse
- 5 HP Keyboard
- 6 3.5" external drive bay supporting a media card reader or a secondary hard disk drive
- 7 5.25" external drive bay supporting an optical disk drive
- 8 3.5" internal drive bay supporting primary hard disk drive
- 9 240W standard or 90% high efficiency Power Supply
- 10 HP Monitor (sold separately)

## Overview

### HP Compaq 6200 Pro Microtower Business PC

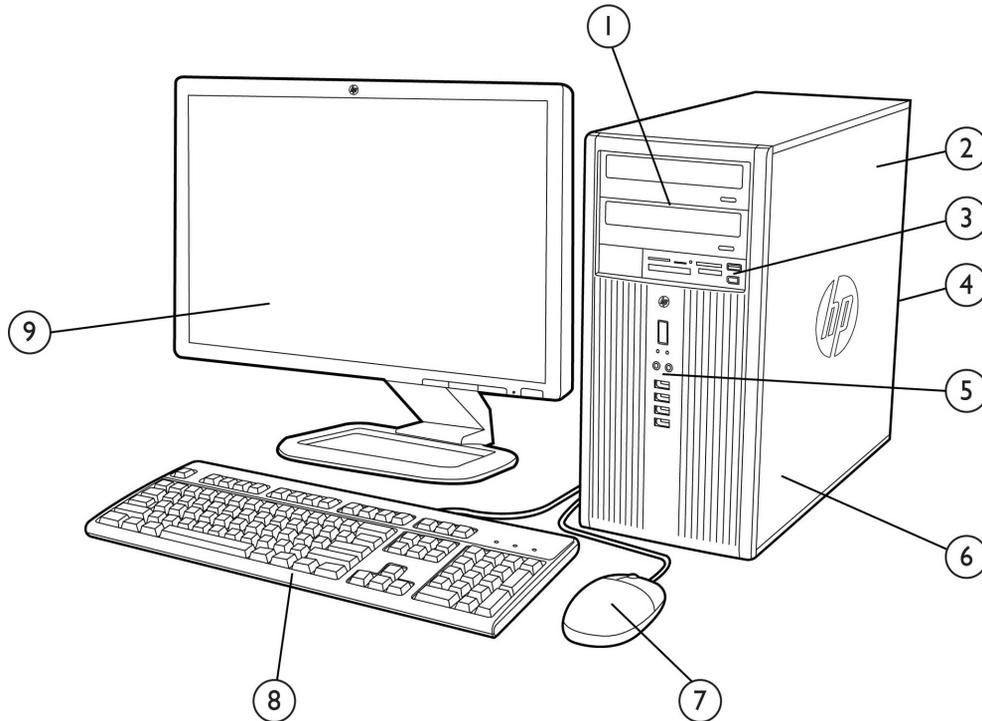

- 1 (2) 5.25" external drive bays supporting optical disk drives or removable hard disk drives; (2) 3.5" internal drive bays supporting hard disk drives
- 2 320W standard or 90% high efficiency Power Supply
- 3 3.5" external drive bay supporting the HP Media Card Reader
- 4 Rear I/O includes (6) USB 2.0 ports, serial port, PS/2 mouse and keyboard ports, RJ-45 network interface, DisplayPort v1.1a and VGA video interfaces, and 3.5mm audio in/out jacks
- 5 Front I/O includes (4) USB 2.0 ports, dedicated headphone output, and a microphone/headphone jack
- 6 Full height expansion slots include (1) PCI, (2) PCI Express x1 and (1) PCI Express x16 graphics
- 7 HP Mouse
- 8 HP Keyboard
- 9 HP Monitor (sold separately)

## Overview

### At A Glance

- Choice of two professional chassis form factors: SFF & MT
- PC chassis and all internal components and modules are 100% free of brominated flame retardants (BFRs) and Polyvinyl Chloride (PVC).
- UEFI BIOS developed and engineered by HP for better security, manageability and software image stability
- Intel Q65 Express chipset supporting Intel 2nd generation Core processors and featuring Intel HD Graphics)
- Intel 82579LM GbE integrated network connection
- DDR3 Synchronous Dynamic Random Access Memory (SDRAM)
- Integrated dual independent monitor support via VGA and digital DisplayPort v1.1a video interfaces
- Standard efficiency or 90% high efficiency energy saving power supplies available
- ENERGY STAR qualified
- Guaranteed lengthy purchase lifecycles and image stability
- Software image fully compatible across all models and form factors
- Created using industry leading Design for Environment standards
- Selected configurations with global availability easily set up and ordered through HP.com Business to Business portals (<http://h10019.www1.hp.com/business-site/index.html>)
- Tailored HP Factory Express deployment and lifecycle services available (<http://h71028.www7.hp.com/enterprise/cache/97688-0-0-225-121.aspx>)
- Protected by HP Services, including standard warranties up to 5-5-5 (terms and conditions vary by country; certain restrictions and exclusions apply)
- Tool-less serviceability features for easier upgrades and repairs



Standard Features and Configurable Components (availability may vary by country)

## Operating Systems

### Preinstalled

Genuine Windows Vista Business)<sup>1</sup>  
Genuine Windows Vista Home Basic<sup>1</sup>  
Genuine Windows 7 Home Basic Edition (32-bit)<sup>2</sup>  
Genuine Windows 7 Home Premium Edition (32-bit or 64-bit)<sup>2</sup>  
Genuine Windows 7 Professional Edition (32-bit or 64-bit)<sup>2</sup>  
Genuine Windows 7 Ultimate Edition (32-bit or 64-bit)  
FreeLnx

### Supported

Genuine Windows XP Professional Edition  
Genuine Windows Vista Enterprise Edition<sup>1</sup>  
Genuine Windows 7 Enterprise Edition

### Certified

Novell SUSE Linux Enterprise Desktop 11 †  
Red Hat Enterprise Linux 64 ††

<sup>1</sup> Certain Windows Vista product features require advanced or additional hardware. Refer to the following web sites for details:

[www.microsoft.com/windowsvista/getready/hardwarereqs.mspx](http://www.microsoft.com/windowsvista/getready/hardwarereqs.mspx)

[www.microsoft.com/windowsvista/getready/capable.mspx](http://www.microsoft.com/windowsvista/getready/capable.mspx)

Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: [www.windowsvista.com/upgradeadvisor](http://www.windowsvista.com/upgradeadvisor)

† The following features are not supported by Novell SUSE Linux Enterprise Desktop:

- Intel Gigabit CT Desktop NIC
- Broadcom NetXtreme Gigabit Ethernet Plus
- HP 22-in-1 Media Card Reader
- HP ProtectTools
- HP Blu-ray Writer playback of commercial movies
- DisplayPort video interface
- HP 2nd serial port adapter
- Power Management features
- Systems configured with Linux do not qualify for ENERGY STAR

†† The following features are not supported by Red Hat Enterprise Linux 64:

- TPM v1.2 embedded Security Chip
- Intel Gigabit CT Desktop NIC
- HP Wireless 802.11b/g/n NIC
- HP 22-in-1 Media Card Reader
- HP Blu-ray Writer
- HP FireWire / IEEE 1394 PCI Card
- HP 2nd serial port Adapter
- HP USB Smart Card (CCID) Keyboard
- AMD Radeon HD 6350 Graphics



### Standard Features and Configurable Components (availability may vary by country)

- NVIDIA Quadro NVS 295 Graphics
- Power Management features
- Systems configured with Linux do not qualify for ENERGY STAR

### Value Added Software (included with all models; not included when configured with FreeDOS)

HP Vision Diagnostics

PDF Complete Special Edition

Microsoft Office Starter Edition 2010

### Value Added Software (included with select models; not included when configured with FreeDOS)

HP Power Assistant v2.0

HP Virtual Rooms

Computer Setup Utility

Corel WinDVD

Roxio Creator Business

Mozilla Firefox for Solutions 2011

Norton Internet Security 2011 <sup>1</sup>

HP Direct Connect

HP MyRoom

<sup>1</sup> Includes a 60 day subscription for virus definition and minor program revision updates. Internet access required to receive updates.

### HP Business PC Services and Feature

HP Stable Platform Program

Factory Express Deployment and Lifecycle Services

Intel Stable Platform Program

Trusted Platform Module (TPM v1.2 \*)

Business-to-Business Portals

HP Global Series Services

\* TPM module disabled where restricted by law, i.e. Russia.

### Service and Support

On-site warranty and service<sup>1</sup>: This limited warranty and service offering delivers parts, labor and on-site repair for terms up to 5 years. Response time is next business day<sup>2</sup> and includes free telephone support<sup>3</sup> 24 x 7. Global coverage<sup>2</sup> ensures any product purchased in one country and transferred to another non-restricted country will remain fully covered under the original warranty and service offering. Some countries/regions do not offer one year onsite and labor.

<sup>1</sup> Terms and conditions may vary by country. Certain restrictions and exclusions apply

<sup>2</sup> On-site services may be provided pursuant to a service contract between HP and an authorized HP third party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country

<sup>3</sup> Technical telephone support applies only to HP configured, HP and HP qualified third party hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

### Chipset

Intel Q65 Express



Standard Features and Configurable Components (availability may vary by country)

## Processor

### Intel® Pentium® Processors

Intel Pentium G620 Processor

2.60 GHz, 3M cache, 2 cores/2 threads  
Intel HD Graphics

Intel Pentium G840 Processor

2.80 GHz, 3M cache, 2 cores/2 threads  
Intel HD Graphics

Intel Pentium G850 Processor

2.90 GHz, 3M cache, 2 cores/2 threads  
Intel HD Graphics

### Intel® 2<sup>nd</sup> Generation Core™ i3 Processors

Intel Core i3-2100 Processor

3.10 GHz, 3M cache, 2 cores/4 threads  
Intel HD Graphics 2000

Intel Core i3-2105 Processor

3.10 GHz, 3M cache, 2 cores/4 threads  
Intel HD Graphics 3000

Intel Core i3-2120 Processor

3.30 GHz, 3M cache, 2 cores/4 threads  
Intel HD Graphics 2000

### Intel® 2<sup>nd</sup> Generation Core™ i5 Processors

Intel Core i5-2400 Processor

3.10 GHz, 6M cache, 4 cores/4 threads  
Intel HD Graphics 2000  
Intel Stable Image Platform Program (SIPP)

Intel Core i5-2500 Processor

3.30 GHz, 6M cache, 4 cores/4 threads  
Intel HD Graphics 2000  
Intel Stable Image Platform Program (SIPP)

### Intel® 2<sup>nd</sup> Generation Core™ i7 Processors

Intel Core i7-2600 Processor

3.40 GHz, 8M cache, 4 cores/8 threads  
Intel HD Graphics 2000  
Intel Stable Image Platform Program (SIPP)



Standard Features and Configurable Components (availability may vary by country)

## System Memory Support

The HP Compaq 6200 Elite Series supports the 2nd generation Intel® Core™ processor family. Based on a new PC micro-architecture, the processor is designed for a two-chip platform consisting of a processor and Platform Controller Hub (PCH). Unlike previous generations, the processor includes an integrated memory controller (IMC). The IMC supports DDR3 protocols with two independent, 64-bit wide channels each accessing one or two DIMMs.

- Two channels of non-ECC unbuffered DDR3 memory with a maximum of two UDIMMs per channel
- Single-channel and dual-channel memory organization modes
- Data burst length of eight for all memory organization modes
- DDR3 memory data transfer rates of 1066 MT/s (PC3-8500) and 1333 MT/s (PC3-10600)
- 64-bit wide channels
- DDR3 I/O voltage of 1.5V
- Maximum memory bandwidth of 10.6 GB/s in single-channel mode or 21 GB/s in dual-channel mode assuming DDR3 1333 MT/s (PC3-10600)
- 1GB, 2GB, and 4GB DDR3 DRAM technologies are supported. Using 4GB device technologies, the largest memory capacity possible is 32 GB, assuming dual channel mode with four x 8 GB dual ranked unbuffered DIMM memory configuration.

**CAUTION:** You must shut down the computer and disconnect the power cord before adding or removing memory modules. Regardless of the power-on state, voltage is always supplied to the memory modules as long as the computer is plugged in to an active AC outlet. Adding or removing memory modules while voltage is present may cause irreparable damage to the memory modules or system board.

## Memory Configurations:

Slot 1 is black and must always be populated. Not all memory configurations possible are represented below.

### NOTE:


For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

Total Memory	Slot			
	Channel A		Channel B	
	1 (black)	2 (white)	3 (white)	4 (white)
2 GB	2 GB	unpopulated	unpopulated	unpopulated
4 GB (dual channel)	2 GB	unpopulated	2 GB	unpopulated
8 GB (dual channel)	2 GB	2 GB	2 GB	2 GB
16 GB (dual channel)	4 GB	4 GB	4 GB	4 GB




Standard Features and Configurable Components (availability may vary by country)

Small Form Factor

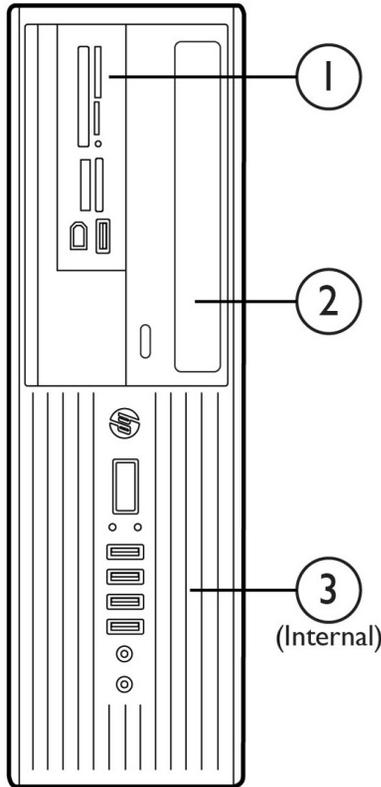

Microtower

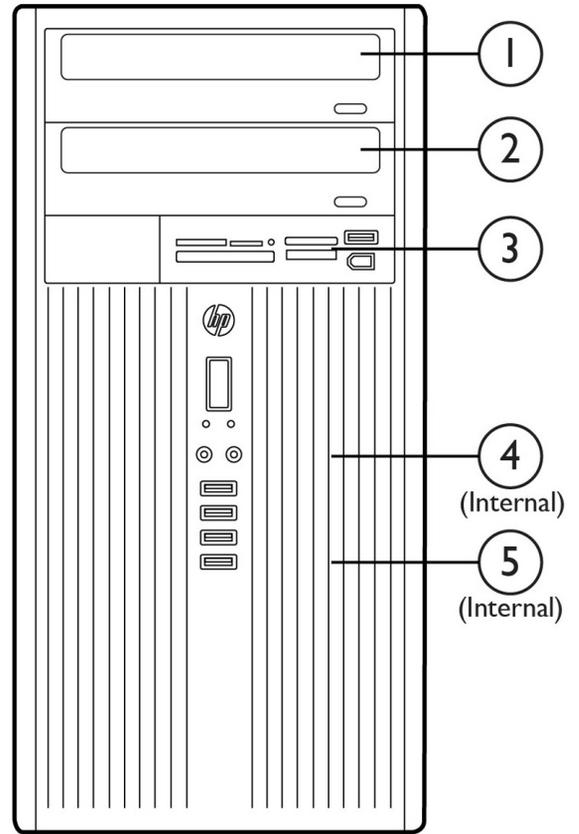

Storage Drive Support						
	SFF			MT		
	MCR	ODD	HDD	MCR	ODD	HDD
Quantity Supported	1	1	2	1	2	2
Position	1	2	1,3	3	1,2	4,5

## Data Storage Drives

### 160-GB Hard Disk Drives

HP 160GB 10K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive  
Includes 3.5" adapter

### 250-GB Hard Disk Drives

HP 250-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

### 300-GB Hard Disk Drives

HP 300GB 10K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive  
Includes 3.5" adapter



Standard Features and Configurable Components (availability may vary by country)

---

## 320-GB Hard Disk Drives

HP 320-GB 7.2K rpm SATA 3.0Gb/s 2.5" Self-Encrypting Drive

Includes 3.5" adapter

---

## 500-GB Hard Disk Drives

HP 500-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

---

## 750-GB Hard Disk Drives

HP 750-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

---

## 1-TB Hard Disk Drives

HP 1-TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

---

## Solid State Drives

HP 80-GB SATA 3.0Gb/s Solid State Drive

Includes 3.5" adapter

HP 160-GB SATA 3.0Gb/s Solid State Drive

Includes 3.5" adapter

---

## Optical Disc Drives

HP DVD-ROM Drive<sup>1</sup>

HP SuperMulti DVD Writer Drive<sup>1,2,3</sup>

HP Blu-ray Writer Drive

<sup>1</sup> For playing DVDs, Corel WinDVD 8

<sup>2</sup> For writing CDs, choice of Sonic/Roxio Easy Media Creator 9 or Roxio Business Creator 10

<sup>3</sup> For writing CDs and DVDs, video editing and authoring DVDs, choice of Sonic/Roxio Easy Media Creator 9 or Roxio Business Creator 10

---

## Media Card Readers

HP 22-n-1 Media Card Reader

---



Standard Features and Configurable Components (availability may vary by country)

## Security Solutions and Capabilities

- Trusted Platform Module (TPM) 1.2<sup>1</sup>
- Stringent security (via BIOS)<sup>2</sup>
- SATA port disablement (via BIOS)
- Drive lock
- Serial, parallel, USB enable/disable (via BIOS)
- Optional USB Port Disable at factory (user configurable via BIOS)
- Removable media write/boot control
- Power-On password (via BIOS)
- Setup password (via BIOS)
- HP Solenoid Hood Lock / Sensor
- Support for chassis padlocks and cable lock devices
- Intel Identify Protection Technology (IPT):

Models configured with Intel 2nd generation Core processors have the ability to utilize advanced security protection for online transactions. IPT, used in conjunction with participating web sites, provides double identity authentication by adding a hardware component in addition to the usual user name and password. IPT is initialized through an HP ProtectTools module (sold separately).

<sup>1</sup> TPM module disabled where use is restricted by law; for example, Russia.

<sup>2</sup> This setting is defaulted to disable, but when enabled, the PW jumper will not clear the BIOS pre-boot authentication passwords.

---

## Network Interface Connections

- Intel 82579LM integrated GbE Network Connection
- Intel Gigabit CT Desktop NIC (PCIe x1)
- HP 802.11 b/g/n Wireless NIC (PCIe x1)

---

## Graphics

- Intel HD Graphics 2000/3000 (integrated)
- AMD FirePro 2270 Graphics (PCIe x16)
- AMD Radeon HD 6350 Graphics (PCIe x16)
- AMD Radeon HD 6450 Graphics (PCIe x16)
- AMD Radeon HD 6570 Graphics (PCIe x16)
- [Available on the Microtower only](#)
- Nvidia NVS 295 Graphics (PCIe x16)
- Nvidia NVS 300 Graphics (PCIe x16)
- NVIDIA GeForce 405 Graphics (PCIe x16)
- [Available in China only](#)

---

- HP DisplayPort Cable
- HP DisplayPort to DVI-D Adapter



## Standard Features and Configurable Components (availability may vary by country)

---

HP DisplayPort to HDMI Adapter  
HP DisplayPort to VGA Adapter

---

### Multi-Media

High Definition Audio with Realtek ALC261 codec (all ports are stereo)  
Microphone/Headphone\* and dedicated headphone front ports (3.5mm)  
Line-out and Line-In rear Ports\* (3.5mm)  
Multi-streaming capable\*  
Internal Speaker (standard)  
HP Thin USB Powered Speakers

\* The front microphone port is re-taskable as a Line-in, Microphone-in or Headphone-in port. Rear audio input ports are re-taskable as a Line-in or Microphone-in port. External speakers must be powered externally. Multi-streaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/from the front and rear jacks. This allows for different audio applications to use separate audio ports on the system. For example, the front jacks could be used with a headset for a communications application while the rear jacks are being used with external speakers and a multimedia application.

---

### Input/Output Devices

HP PS/2 Standard Keyboard  
HP USB Standard Keyboard  
HP USB Keyboard with USB ports  
HP USB Smart Card (CCID) Keyboard  
HP USB Mini Keyboard  
HP USB and PS/2 Washable Keyboard

---

HP PS/2 Optical Mouse  
HP USB Optical Mouse  
HP USB Laser Mouse  
HP USB and PS/2 Washable Mouse

---

### Miscellaneous Devices and Configurations

HP FireWire IEEE 1394 PCIe x1 Card  
HP SuperSpeed USB 3.0 PCIe x1 Card  
HP Serial Port Adapter (RS-232 compatible); provides 2nd Serial Port  
HP Parallel Port Adapter  
HP eSATA Port Adapter  
HP SFF Tower Stand



After-Market Options (availability may vary by region)

### Communication Devices

	Part Number
Intel Gigabit CT Desktop NIC (PCIe x1)	FH969AA
Broadcom NetXtreme GbE Ethernet Plus NIC (PCIe x1)	FS215AA
HP Wireless 802.11 b/g/n NIC (PCIe x1)	FH971AA

### Graphics Solutions

	Part Number
AMD FirePro 2270 Graphics (PCIe x16)	QK551AA
AMD Radeon HD 6350 Graphics (PCIe x16)	QK638AA
AMD Radeon HD 6450 Graphics (PCIe x16)	QM229AA
AMD Radeon HD 6570 Graphics (PCIe x16) (Available in Microtower only)	QP027AA
Nvidia Quadro NVS 295 Graphics (PCIe x16)	FY943AA
Nvidia Quadro NVS 300 Graphics (PCIe x16)	BV456AA
Nvidia GeForce 405 Graphics (PCIe x16) (Available in China only)	QM194AA

HP DisplayPort Cable Kit	VN567AA
HP DisplayPort To Dual Link DVI-D Adapter	NR078AA
HP DisplayPort To DVI-D Adapter	FH973AA
HP DisplayPort to HDMI Adapter	BP937AA
HP DisplayPort to VGA Adapter	AS615AA
HP DMS-59 to Dual DVI Cable	DL139A
HP DMS-59 to Dual DisplayPort Adapter	XP688AA

### Data Storage Drives and Accessories

	Part Number
HP 160GB 10K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive Includes 3.5" adapter	FX618AA
HP 300GB 10K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive Includes 3.5" adapter	FX619AA
HP 500-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive	QK554AA
HP 750-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive	QR469AA
HP 1-TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive	QK555AA

HP 80-GB SATA 3.0Gb/s Solid State Drive	BM848AA
HP 160-GB SATA 3.0Gb/s Solid State Drive	BW321AA

HP eSATA Adapter	FH966AA
HP Removable SATA Hard Drive Enclosure (frame & carrier)	RY102AA
HP Removable SATA Hard Drive Enclosure (carrier only)	RY103AA



After-Market Options (availability may vary by region)

---

### Input Devices

	Part Number
HP PS/2 Standard Keyboard	DT527A
HP USB Standard Keyboard	DT528A
HP USB Keyboard with USB ports	BT330AA
HP USB Mini Keyboard	AS601AA
HP USB Gray Keyboard	DT529A
HP USB Smart Card (CCID) Keyboard	BV813AA
HP USB Keyboard and Mouse Kit	RC465AA

---

HP USB Washable Keyboard	VF097AA
HP USB and PS/2 Washable Mouse	BM866AA
HP USB and PS/2 Washable Keyboard and Mouse Kit	BU207AA

---

HP PS/2 Optical Mouse	EY703AA
HP USB Optical Mouse	DC172AT
HP USB Laser Mouse	GW405AT
HP USB Travel Mouse	RH304AA

---

HP 2.4GHz Wireless Keyboard and Mouse	NB896AA
---------------------------------------	---------

---

### System Memory

	Part Number
HP 1 GB DIMM	AT023AA
HP 2 GB DIMM	AT024AA
HP 4 GB DIMM	VH638AA

---

### Multi-Media Devices

	Part Number
HP Thin USB Powered Speakers	KK912AA
HP DVD-ROM Drive	AR629AA
HP SuperMulti DVD Writer Drive	AR630AA
HP Blu-ray Writer Drive	AR482AA

---

### Removable Media Storage

	Part Number
HP USB External Diskette Drive	DC141B
HP 22-n-1 Media Card Reader	AR941AA

---



*After-Market Options (availability may vary by region)*

### Security Devices

	Part Number
HP/Kensington MicroSaver Cable Lock	PC766A
HP Business PC Security Lock	PV606AA
HP SFF Solenoid Lock and Hood Sensor	BP428AA
HP MT Solenoid Lock and Hood Sensor	DE618A
HP SFF Wall Mount/Security Sleeve	VN570AA
HP Keyed Lock Cable	BV411AA

---

### HP Client Automation Software

	Part Number
HP Client Automation - Standard Edition (single seat)	T3488AA
HP Client Automation - Standard Edition (10 seats)	TA599AA
HP Client Automation - Standard Edition (100 seats)	TA600AA
HP Client Automation - Standard Edition (500 seats)	TA601AA
HP Client Automation - Standard Edition (1,000 seats)	T3489AA

---

### Stands and Accessories

	Part Number
HP Integrated Work Center Stand (SFF)	QK549AA
HP SFF Tower Stand	VN569AA
HP Serial Port Adapter (RS-232 compatible)	PA716A
HP Parallel Port Adapter	KD061AA
HP 5.25" Blank Bezel Kit (50 pack)	DC177B
HP FireWire IEEE 1394 Card	PA997A
HP SuperSpeed USB 3.0 Card	BM867AA



## Technical Specifications

### Weights & Dimensions

(configured with 1 HDD and 1 ODD)

	SFF	MT
Chassis (H x W x D)	4.0 x 13.3 x 14.9 in (100 x 338 x 379 mm)	14.9 x 7.0 x 17.0 in (377 x 177 x 431 mm)
System Volume	782.77 cu in (12.8 L)	1739 cu in (28.5 L)
Tower Stand (H x W x D)	1.1 x 7.0 x 7.9 in (29 x 178 x 200 mm)	N/A
Packaging (H x W x D)	9.0 x 19.7 x 23.4 in (229 x 500 x 594 mm)	19.7 x 12.2 x 23.6 in (500 x 310 x 600 mm)
System Weight*	16.7 lb (7.6 kg)	20.5 lb (9.3 kg)
Shipping Weight*	17.9 lb (8.1 kg)	28.8 lb (13.1 kg)
Max Supported Weight (desktop orientation)	77.0 lb (35.0 kg)	N/A

### I/O Ports

USB 2.0	Front - four (4) ports Rear - six (6) ports
Serial	one RS-232 compatible port standard second port available optionally
Parallel	one port available as an option
eSATA	one port available as an option
PS/2	color coded support for keyboard (purple) and mouse (green)
Video	VGA and DisplayPort v1.1a provide integrated dual independent monitor support
DVI output	available via optional DisplayPort to DVI Adapter
Audio	Front - microphone & headphone Rear - line input (supports microphone or line input), line out All ports are 3.5mm in diameter <b>NOTE:</b> <a href="#">See Audio/Visual section for information on re-taskable audio ports.</a>
NIC	Industry standard RJ-45 port accesses the integrated network interface controller



## Technical Specifications

### Slots

5-volt PCI

### SFF

1 each  
2.5" low profile  
6.6" length  
25W max. power

### MT

1 each  
4.2" full height  
6.6" length  
25W max. power

PCI Express x1

2 each  
2.5" low profile  
6.6" length  
10W max. power

2 each  
4.2" full height  
6.6" length  
10W max. power

PCI Express x16  
(Primary)

1 each  
2.5" low profile  
6.6" length  
25W max. power

1 each  
4.2" full height  
6.6" length  
75W max. power

### Bays

3.5" external

### SFF

1 bay available for Media Card Reader unless used for a secondary hard drive

### MT

5.25" external

1 each  
8.19" depth

2 each  
8.19" depth

Internal HDD Bays

1 each  
3.5" drives

2 each  
3.5" drives

### Controller

Hard Drive Controller

These systems provide four serial ATA (SATA) interfaces that support transfer rates up to 6.0 Gb/s (for ports 0 and 1, 3 Gb/s on all others). These systems can also support an external SATA (eSATA) device through an optional bracket/cable assembly.

SATA Interfaces

2 ea. SATA 3.0  
1 ea. SATA 2.0  
1 ea. eSATA

Host SATA Controller

Advanced Host Controller Interface (AHCI) Revision 1.2. The specification includes a description of the hardware/software interface between system software and the host controller hardware.



## Technical Specifications

### Unit Environment and Operating Conditions

#### General Unit Operating Guidelines

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.
- Leave a 10.2 cm (4 in) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's recirculated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.

Temperature Range	Operating: 50° to 95° F (10° to 35° C)* Non-operating: -22° to 140° F (-30° to 60° C)
Relative Humidity	Operating: 10% to 90% (non-condensing at ambient) Non-operating: 5% to 95% (non-condensing at ambient)
Maximum Altitude (unpressurized)	Operating: 10,000 ft (3048 m) Non-operating: 30,000 ft (9144 m)

\* Operating temperature is de-rated 1.0 deg C per 300 m (1000 ft) to 3000 m (10,000 ft) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.

### Power Supply

#### SFF

#### MT

Standard Efficiency	240W active PFC	320W active PFC
High Efficiency*	240W active PFC 87/90/87% efficient @ 20/50/100% load	320W active PFC 87/90/87% efficient @ 20/50/100% load
Operating Voltage Range	90 - 264 VAC	
Rated Voltage Range	100 - 240 VAC	
Rated Line Frequency	50/60 Hz	
Operating Line Frequency Range	47 - 63 Hz	
Rated Input Current	4A	5.5A
Rated Input Current with Energy Efficient* Power Supply	4A	5.5A
Current Leakage (NFPA 99)	< 275 $\mu$ A	< 450 $\mu$ A
Power Supply Fan	92mm variable speed	
Power Cord Length	6.0 ft. (1.83 m)	

\* High efficiency power supply is a requirement for ENERGY STAR qualification in conjunction with a select range of processors and modules



### Technical Specifications

#### ROM BIOS Information

Key features of the HP BIOS include:

- Deployment and manageability - HP BIOS provides several technologies that help integrate the HP Compaq 6200 Pro Series PC into the enterprise, such as PXE, remote configuration, remote control, and F10 Setup support for 12 languages.
- Stability - HP BIOS supports the HP stable product roadmap by releasing only critical BIOS changes to the factory and advanced change notification.
- Supports UEFI specification 2.1
- Thermal and power management - The HP BIOS provides and enables thermal and power management technologies so component temperatures are managed for high reliability and to assist in operating the HP Business Desktop computer in any enterprise environment.
- Acoustic performance - Industry leading acoustic emissions across the range of operating conditions.
- Serviceability - HP BIOS provides diagnostic and detailed service information.
- Upgrades and recovery - HP BIOS provides numerous ways to upgrade HP Business Desktop computers, including BIOS updates from within DOS (DOSFlash), BIOS updates from within Windows (HPQFlash), HP Client Manager, and fail-safe recovery. In addition, the HP Business Desktop BIOS Utilities tool enables replicated BIOS setup throughout the Enterprise; it is available from within the BIOS software and from the support website.
- HP BIOS uses PKI signing of the BIOS for trusted BIOS upgrades and recovery.

#### Additional HP BIOS Features

- Power-On password - Helps prevent an unauthorized user from powering on the system.
- Administrator password - Also known as the setup password, this helps prevent unauthorized changes to the system configuration. If the administrator password is not known, the BIOS version cannot be changed and changes cannot be made to BIOS settings using F10 setup or under the OS.
- Advanced Configuration and Power Interface (ACPI) - Represents a significant innovation in power and configuration management, allowing operating systems and applications to manage power based on activity and usage. HP Compaq business PCs use ACPI to provide power conservation features. S5 Max Power Savings setting supports EU Lot6 requirement and allows the computer to power down below 1W in S5 (when turned off). When S5 Max Power Savings feature is enabled power to slots is turned off along with WOL functionality.

---

#### Other Features

- Advanced Configuration and Power Management Interface (ACPI). Allows the system to wake from a low power mode. Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system.
  - System Management BIOS v2.6
  - Intel Wired for Management support; industry wide initiative to make Intel architecture based PCs, servers and mobile computers more inherently manageable out-of-the-box and over the network
  - Dual State Power Button; acts as both an on/off button and a suspend-to-sleep button
- 



## Technical Specifications

### Serviceability Features

- Dual colored power LED on front of computer to indicate either normal or fault condition
- Diagnostic LED Explanation Table:
  - Number of 1-second red LED blinks followed by a 2-second pause, then repeats:
    - 2 - processor thermal protection activated
    - 3 - processor not installed
    - 4 - power supply failure
    - 5 - memory error
    - 6 - video error
    - 7 - PCA failure (ROM detected failure prior to video)
    - 8 - invalid ROM, bootblock recovery mode
    - 9 - system not fetching code
    - 10 - system hang while loading an option ROM
- System/Emergency ROM
- Flash ROM
- CMOS Battery Holder for easy replacement
- Flash Recovery with Video Configuration Record Software
- 5 Aux Power LED on System PCA
- Processor ZIF Socket for easy Upgrade
- Over-Temp Warning on Screen (Requires IM Agents)
- Clear Password Jumper
- DIMM Connectors for easy Upgrade
- Clear CMOS Button
- NIC LEDs (integrated) (Green & Amber)
- Dual Color Power and HD LED - To Indicate Normal Operations and Fault Conditions
- Color coordinated cables and connectors
- Tool-less Hood Removal
- Front power switch
- System memory can be upgraded without removing the system board or any internal components
- Tool-less Hard Drive, CD & Diskette Removal
- Green Pull Tabs, and Quick Release Latches for easy identification

### Additional Features

	Description
Towerable Orientation	SFF can be oriented as either a desktop or a tower
Drive Lock	Implementation of the industry standard ATA Security feature set. When enabled, it prevents software access to user data on the drive until one or two user-defined passwords are provided. DPS Access through F10 Setup during Boot
Drive Protection System	A diagnostic hard drive self test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user Running independently of the operating system, it can be accessed through a Windows-based diagnostics utility or through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures
SMART Technology (Self-Monitoring,	Allows hard drives to monitor their own health and to raise flags if imminent failures



## Technical Specifications

Analysis and Reporting Technology)

were predicted

SMART I - Drive Failure Prediction

Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count

SMART II - Off-Line Data Collection

By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure

SMART III - Off-Line Read Scanning with Defect Reallocation

IOEDC: I/O Error Detection Circuitry

SMART IV - End-to-End CRC for hard drives

Detects errors in Read/Write buffers on HDD cache RAM

Interface in F10 setup provides confirmation of SMART IV support.



## Technical Specifications - Audio

### High Definition Audio

Type	Integrated
HD Stereo Codec	Realtek 2-channel ALC261 codec
Audio I/O Ports	Front microphone-In (150-K ohm Input Impedance) Rear Line-In/Microphone input (150-K ohm Input Impedance, function is configurable by audio driver) Rear Line-Out* (190 ohms Output Impedance, expects at least a 10-K ohm load) Front Headphone-Out (0.5 Ohm Output Impedance, expects at least a 32 ohm load) Front Microphone/Headphone jack is re-task able to provide Microphone input, line-in or Headphone output to support connecting two headphones to the front of the system. When configured as a second front headphone output, both front headphone outputs are always driven with the same signal. All ports are 3.5mm in diameter
Internal Speaker Amplifier	For the internal speaker only. External speakers must be powered externally. Rear Line-in audio port is re-taskable as either Line-in or Microphone-In.
Multi-streaming Capable	Multi-streaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/from the front and rear jacks.
Sampling	8 kHz - 192 kHz
Wavetable Syntheses (software)	Yes - Uses OS soft wavetable
Analog Audio	Yes
# of Channels on Line-Out (mono/stereo)	Stereo (Left & Right channels)
Internal Audio Speaker Power Rating	1.5 W
Internal Speaker	Yes
External Speaker Jack (Line-Out)	Yes

---



## Technical Specifications - Audio

### HP Thin USB Powered Speakers

On/Off/Volume Controls	Right side of right speaker
Power LED	Front of right speaker (green)
Frequency Response	FO to 20kHz
Watts	2/3 watt (normal/maximum)
Dimensions/Speaker (H x W x D)	5.72 x 3.74 x 0.96 in 14.52 x 9.50 x 2.45 cm
Net Weight	0.68 lbs 0.31kg
Color	Black
Environmental (all conditions non-condensing)	<b>Operating Temperature:</b> 14° to 104° F -10° to 40° C <b>Relative Humidity</b> 40% to 90%
Speaker Cable Length	<b>Input Cord:</b> 5.91 ft 1800mm <b>L-channel Cord:</b> 3.28 ft 1000mm <b>USB Cord:</b> 5.91 ft 1800mm



## Technical Specifications - Communications

### Intel 82579LM GbE Network Connection (integrated)

Connector	RJ-45
System Interface	Integrated on PCA
Controller	Intel 82579LM GbE platform LAN connect networking controller
Memory	24 KB FIFO packet buffer memory
Data rates supported	10/100/1000 Mbps
IEEE Compliance	802.1P 802.1Q 802.2 802.3 802.3ab 802.3az 802.3u
Bus architecture	PCI Express and SMBus
Data transfer mode	PCIe-based interface for active state operation (S0 state) and SMBus for host and management traffic (Sx low power state)
Power requirement	Requires 3.3V and 1.05V or just 3.3V with integrated regulators Power consumption 0.697 Watts
Boot ROM support	Yes
Network transfer mode	Full-duplex Half-duplex (not supported for the 1000BASE-T transceiver)
Network transfer rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
Environmental	Operating Temperature: 0° to 85° C Operating Humidity: 60% RH
Management	WOL, auto MDI crossover, PXE, Multi-port teaming, RSS, Advanced cable diagnostic.
Alerting	ASF 2.0 support; AMT 7.0 support

---



## Technical Specifications - Communications

### Intel Gigabit CT Desktop Network Interface Controller

Connector	RJ-45
System Interface	PCI Express x1
Controller	Intel WG82574L Gigabit Ethernet Controller
Memory	Integrated Dual 48K configurable transmit receive FIFO Buffers
Data rates supported	10/100/1000 Mbps
Compliance	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
Bus architecture	PCI-E 1.0a
Data path width	X1, 250 MB/s, Bi-directional interface
Data transfer mode	Bus-master DMA
Hardware certifications	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
Power requirement	Aux 3.3V, 3.0 Watts in 1000base-T and 2.0 Watts in 100Base-T
Boot ROM support	Yes
Network Transfer Rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps (actual rate limited by PCI Bus)
Environmental	Operating Temperature: 32° to 131°F (0° to 55° C) Operating Humidity: 85% at 131° F (55° C)
Dimensions	4.75 x 2.25 x 0.8 in (12.1 x 5.7 x 2.0 cm)
Management	WOL, PXE, DMI, WFM 2.0

### HP 802.11 b/g/n Wireless Network Connection

Dimensions (L x H)	2.8 x 2.2 in (7.0 x 5.7 cm)
Weight	0.08 lbs (40 g)
Controller	Ralink RT2790
System interface	PCI Express x1
Network standard	802.11 b/g/n
Frequency band	2.400 - 2.497 GHz
Operating temperature	14° to 149°F, operating (-10° to 65°C, operating)
Storage temperature	-40° to 176°F, non-operating (-40° to 80°C, non-operating)
Humidity	10-90% operating 5-95% non-operating
Operating voltage	3.3V +/- 9% 12V +/- 8%



## Technical Specifications - Communications

Power Consumption	Platform/WLAN Mode	Power Consumption
	Maximum Power Consumption:	10 Watts
	Transmit Only	4 Watts maximum averaged power over 1 second
	Transmit Packet or Active Scanning	1000 mA peak current for 100 microseconds or longer
	Receive Only Mode or Idle without IEEE PSP mode enabled	3 Watts maximum averaged over 1 second
	Idle, with IEEE PSP mode enabled	1.0 Watts maximum averaged over 1 second
	Transmit Disabled (turned off in software)	50 mW maximum, averaged over 1 second
	Platform in S3 or S4 (power removed from Low Profile PCI Express Card)	5 mW maximum, averaged over 1 second
<b>Output Power</b> (approximate)	802.11b mode	+19 dBm +/- 1.0 dB maximum
	802.11g mode	+17 dBm +/- 1.0 dB maximum
	EWC mode	+17 dBm +/- 1.0 dB maximum (total power in all transmit chains)

Receive Sensitivity	Mode	Data Rate	Sensitivity
	802.11b	1 Mbps	-94 dBm
	802.11b	11 Mbps	-85 dBm
	802.11g	6 Mbps	-91 dBm
	802.11g	18 Mbps	-85 dBm
	802.11g	48 Mbps	-75 dBm
	802.11g	54 Mbps	-72 dBm
	EWC (2.4 GHz)	6.5 Mbps	-87 dBm
	EWC (2.4 GHz)	54 Mbps	-82 dBm
	EWC (2.4 GHz)	81 Mbps	-78 dBm
	EWC (2.4 GHz)	162 Mbps	-74 dBm
	EWC (2.4 GHz)	270 Mbps	-68 dBm
	EWC (2.4 GHz)	300 Mbps	-64 dBm



### Technical Specifications - Communications

Data Transfer Rate	Data Rate (MCS)	Minimum Throughput
	1 Mbps (802.11 b)	700 kbps
	2 Mbps (802.11 b)	1.4 Mbps
	5.5 Mbps (802.11 b)	3.5 Mbps
	11 Mbps (802.11 b)	5.9 Mbps
	12 Mbps (802.11 g)	6 Mbps
	18 Mbps (802.11 g)	9 Mbps
	24 Mbps (802.11 g)	12 Mbps
	36 Mbps (802.11 g)	18 Mbps
	48 Mbps (802.11 g)	21 Mbps
	54 Mbps (802.11 g)	22.5 Mbps
	6.5 Mbps (20 MHz EWC)	4.5 Mbps
	13 Mbps (20 MHz EWC)	9 Mbps
	19.5 Mbps (20 MHz EWC)	13.5 Mbps
	26 Mbps (20 MHz EWC)	18 Mbps
	39 Mbps (20 MHz EWC)	27 Mbps
	52 Mbps (20 MHz EWC)	36 Mbps
	58.5 Mbps (20 MHz EWC)	40 Mbps
	65 Mbps (20 MHz EWC)	45 Mbps
	78 Mbps (20 MHz EWC)	54 Mbps
	104 Mbps (20 MHz EWC)	72 Mbps
	117 Mbps (20 MHz EWC)	81 Mbps
	130 Mbps (20 MHz EWC)	91 Mbps
	13.5 Mbps (40 MHz EWC)	8 Mbps
	27 Mbps (40 MHz EWC)	16 Mbps
	40.5 Mbps (40 MHz EWC)	24 Mbps
	54 Mbps (40 MHz EWC)	32 Mbps
	81 Mbps (40 MHz EWC)	48 Mbps
	108 Mbps (40 MHz EWC)	64 Mbps
	121.5 Mbps (40 MHz EWC)	72 Mbps
	135 Mbps (40 MHz EWC)	81 Mbps

**Security** IEEE and WiFi compliant 64 / 128 bit WEP encryption  
AES: CCM  
802.1x authentication  
WPA: 802.1x. WPA-PSK and TKIP  
WPA2 certification  
IEEE 802.11i  
Cisco Certified Extensions, all versions through V5

**Antenna** HP part number 497317-003

**Certifications** Wi-Fi certified

**Certifications for use by country** United States, Canada, Peru, Taiwan



## Technical Specifications - Graphics

### Intel HD Graphics (integrated)

<b>3D/2D Controller</b>	Microsoft DirectX 10.1 based with support for Pixel Shader 4.1
<b>VGA Controller</b>	Integrated
<b>DisplayPort</b>	v1.1a; integrated, multimode capable; supports HDCP and audio over DisplayPort
<b>Bus Type</b>	PCI Express™ x16
<b>RAMDAC</b>	Integrated, 350 MHz
<b>Memory</b>	<p>Graphics memory is shared with system memory. Graphics memory usage varies depending on the amount of system memory installed, BIOS settings, operating system, and system load. 32 MB is pre-allocated for graphics use at system boot time. Additional memory can be allocated at boot time by the BIOS for PAVP (Protected Audio Video Playback) support for playback of protected video content.</p> <p>Additional memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVMT), to provide an optimal balance between graphics and system memory use.</p>
<b>HW Video Decode</b>	Hardware Accelerated decode for MPEG2 encrypted video; support for PAVP
<b>Maximum Color Depth</b>	32 bits/pixel
<b>Maximum Vertical Refresh Rate</b>	85 Hz at up to 1920x1440, 75 Hz at 2048x1536. Varies with mode and configuration. See table below.
<b>Multi-display Support</b>	<p>Integrated dual independent monitor support facilitated via one VGA port and one DisplayPort v1.1a integrated on the back plane of the system board and presented as part of the rear I/O set of interfaces. Support for DVI, HDMI, dual link DVI or second VGA monitor provided by optional HP DisplayPort adapters (see complete listing of available optional adapters elsewhere in this QuickSpec).</p> <p>The system can support greater than two monitors with the addition of an optional discrete graphics card. Both integrated graphics and discrete graphics can be utilized simultaneously.</p>
<b>Graphics/Video API Support</b>	<p>DirectX 10.1 support in hardware</p> <p>OpenGL 3.0 support in hardware</p>

#### Display Resolutions and Refresh Rates

**NOTE:** other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rates (Hz)	
	Analog	Digital
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A



## Technical Specifications - Graphics

2560x1600

N/A

60\*

\* Only supported when using a DisplayPort connection

**NOTE:** other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

**NOTE:** 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

## AMD FirePro 2270 Graphics Card

Form Factor	PCI Express x16 (generation 2.0) Low Profile, half length, 2.3" x 6.6" Full height bracket utilized when configured to CMT or MT
Graphics Controller	AMD FirePro 2270 GPU
Output Connector	Single DMS-59 connector Supports dual analog displays with included DMS-59 to dual VGA Y cable. Also support dual digital displays with an optional DMS-59 to dual DVI cable.
Core Clock	600MHz
Memory Clock	600MHz
Memory Frame Buffer	512MB, DDR3, 64-bit wide
Supported Graphics APIs	DirectX 11 support in hardware OpenGL 4.0 support in hardware

### Display Resolutions and Refresh Rates

**NOTE:** other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rate (Hz)	
	Analog	Digital
640 x 480	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 1024	85	60
1440 x 900	75	60
1600 x 1200	85	60
1680 x 1050	75	60
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	N/A
2048 x 1536	75	N/A

**NOTE:** 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.



## Technical Specifications - Graphics

### AMD Radeon HD 6350 Graphics Card

Form Factor	PCI Express x16 (generation 2.0) Low Profile, half length, 2.3" x 6.6" Full height bracket utilized when configured to CMT or MT
Graphics Controller	AMD HD 6350 GPU
Output Connector	Single DMS-59 connector Supports dual analog displays with included DMS-59 to dual VGA Y cable. Also supports dual digital displays with an optional DMS-59 to dual DVI cable.
Core Clock	650MHz
Memory Clock	800MHz
Memory Frame Buffer	512MB, DDR3, 64-bit wide
Supported Graphics APIs	HDCP supported on DVI output using optional DMS-59 to dual DVI cable. DirectX 11 support in hardware. OpenGL 4.0 support in hardware.

#### Display Resolutions and Refresh Rates

**NOTE:** other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rate (Hz)	
	Analog	Digital
640 x 480	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 1024	85	60
1440 x 900	75	60
1600 x 1200	85	60
1680 x 1050	75	60
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	N/A
2048 x 1536	75	N/A

**NOTE:** 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.



## Technical Specifications - Graphics

### AMD Radeon HD 6450 Graphics Card

Form Factor	PCI Express x16 (Generation 2.0) Low Profile, half length, 2.3" x 6.6" Full height bracket utilized when configured to CMT or MT
Graphics Controller	AMD HD 6450 GPU
Output Connector	One (1) DisplayPort 1.1 One (1) Dual Link DVI-I Includes a DVI to VGA adapter. Other optional adapter kits are available to support DVI-D, and HDMI monitor inputs (see a complete listing of available optional adapters elsewhere in this QuickSpec). Supports audio with video through the DisplayPort 1.1 connector. DisplayPort v1.2 support will be provided in a future driver update.
Core Clock	625MHz
Memory Clock	800MHz
Memory Frame Buffer	512MB, DDR3, 64-bit wide
Display Maximum Resolution	Digital: 2560 x 1600 Analog: 2048 x 1536 (see chart below for more resolutions)
Supported Graphics APIs	HDCP supported on DisplayPort 1.1 and DVI output. DirectX 11 support in hardware.

#### Display Resolutions and Refresh Rates

**NOTE:** other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rate (Hz)	
	Analog	Digital
640 x 480	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 1024	85	60
1440 x 900	75	60
1600 x 1200	85	60
1680 x 1050	75	60
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	60*
2048 x 1536	75	60*
2560 x 1600	N/A	60*

\* Only supported when using a dual link DVI or DisplayPort monitor connection

**NOTE:** 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.



## Technical Specifications - Graphics

### AMD Radeon HD 6570 Graphics Card

Form Factor	PCI Express x16 (generation 2.0) Low Profile, half length, 2.3" x 6.6" Includes full height bracket when configured in CMT or MT chassis.
Graphics Controller	AMD HD 6570 GPU
Output Connector	Two (2) DisplayPort 1.1 One (1) Dual Link DVI-I Includes a DVI-I to VGA adapter. Other optional adapter kits are available to support DVI-D, and HDMI monitor inputs (see complete listing of available optional adapters elsewhere in this QuickSpec). Supports audio with video through the DisplayPort 1.1 connector. Audio is also supported with an optional DisplayPort to HDMI Adapter. DisplayPort 1.2 support will be provided in a future driver update.
Core Clock	650MHz
Memory Clock	900MHz
Memory Frame Buffer	1GB of DDR3, 128-bit wide
Supported Graphics APIs	HDCP supported on DisplayPort and DVI output. DirectX 11 support in hardware. OpenGL 4.0 support in hardware

#### Display Resolutions and Refresh Rates

**NOTE:** other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rate (Hz)	
	Analog	Digital
640 x 480	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 1024	85	60
1440 x 900	75	60
1600 x 1200	85	60
1680 x 1050	75	60
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	60
2048 x 1536	75	60
2560 x 1600	N/A	60

**NOTE:** 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.



## Technical Specifications - Graphics

### NVIDIA NVS 295 Graphics Card

Form Factor	PCI Express x16 (generation 2.0) Low Profile, half length, 2.3" x 6.6" Full height bracket utilized when configured to CMT or MT
Graphics Controller	NVIDIA NVS 295 Graphics Board
Output Connectors	Two (2) DisplayPort Includes two (2) DisplayPort to VGA Adapters
Memory Frame Buffer	256 MB DDR3 SDRAM
Display Output	Drives DisplayPort enabled digital displays at resolutions up to 2560 × 1600 at 60 Hz with reduced blanking Drives DVI enabled digital displays at resolutions up to 1920 × 1200 at 60 Hz with reduced blanking (through DisplayPort to DVI-D (single link) cable)
Supported Graphics APIs	OpenGL 3.0 in hardware DirectX 10.0 in hardware

### NVIDIA NVS 300 Graphics Card

Form Factor	PCI Express x16 (generation 2.0) Low Profile, half length, 2.3" x 6.6" Full height bracket utilized when configured to CMT or MT
Graphics Controller	Nvidia GT218 GPU
Memory Frame Buffer	512MB DDR3, 64-bit wide Single DMS-59 connector
Output Connectors	Supports dual analog displays with included DMS-59 to dual VGA Y cable. Support dual digital displays with an optional adapters (see complete listing of available optional adapters elsewhere in this QuickSpec).
Core Clock	520MHz
Memory Clock	790MHz
Supported Graphics APIs	OpenGL 3.3 support in hardware DirectX 10.0 support in hardware

#### Display Resolutions and Refresh Rates

**NOTE:** other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rate (Hz)	
	Analog	Digital
640 x 480	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 1024	85	60
1440 x 900	75	60
1600 x 1200	85	60
1680 x 1050	75	60
1920 x 1080	85	60-R
1920 x 1200	85	60-R



## Technical Specifications - Graphics

1920 x 1440

85

N/A

2048 x 1536

75

N/A

**NOTE:** 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.

---

## NVIDIA GeForce 405 Graphics Card

<b>Form Factor</b>	PCI Express x16 (Generation 2.0) Low Profile, half length, 2.3" x 6.6" Full height bracket utilized when configured to CMT or MT
<b>Graphics Controller</b>	NVIDIA GeForce 405
<b>Output Connectors</b>	One (1) VGA analog One (1) DVI-I digital
<b>Memory Frame Buffer</b>	512MB DDR3, 64-bit wide
<b>Maximum Resolution</b>	Analog: 1920 x 1440 x 32bpp @ 75Hz Digital: 1600 x 1200 x 32bpp @ 60Hz



### Technical Specifications – Data Storage Drives

---

#### Introduction:

HP Serial Advanced Technology Attachment (SATA) Hard Drives maximize the performance of HP Business PCs by providing the technologies to meet your increasing storage demands with high-capacity drives offering superior reliability and performance.

SATA provides faster data transfer speeds, better system cooling airflow, more bandwidth, more headroom for speed increases in future generations and better data integrity. A next-generation technology, the SATA interface connects hard drives to the PC platform enabling easy aggregation of multiple hard drives into a single PC. This offers you the additional benefits of dedicated bandwidth, the ability to more easily identify device failures and scalability. The HP Compaq 6200 Pro Series supports the latest SATA 6.0Gb/s specification.

#### HP Drive Lock

HP Serial ATA Hard Drives offer enhanced security via a new Drive Lock. When enabled, this ATA security feature set prevents software access to user data on the drive until one or two user-defined passwords are provided.

#### SMART IV Technology

Self Monitoring Analysis and Reporting Technology (SMART) hard drive technology allows hard drives to monitor their own health and to raise flags if imminent failures are predicted. If the drive determines that a failure is imminent, the SMART hard drive technology enables the intelligent manageability or management software to generate a fault alert. While the current versions of SMART hard drives do a good job monitoring the data on the hard drive media, the ever increasing emphasis on reliability and quality has promoted HP to implement SMART IV technology which constantly checks that the data flow from host interface to media and media to host interface is not compromised. This is accomplished by inserting a 2 byte parity code into every 512 byte block in the data path of the hard drive's Cache RAM. This unique parity checking performed by HP's SMART IV technology hard drives, allows for more complete error detection coverage encompassing the entire data path between the host and the hard drive.

Smart IV is also known as IOEDC: I/O Error Detection Code.

#### Native Command Queuing

NCQ or Native Command Queuing is a SATA protocol extension that allows the hard drive to have several write or read commands outstanding at the same time. In contrast, normal non-queued operation requires each command to be completed before the next command is issued by the host system. Queuing allows the drive to complete the commands in the order that allows for best overall throughput. It also involves an advanced method of transferring data to or from the host, called First Party Direct Memory Access (FPDMA), which allows the hard drive and the host controller to manage the data transfers for multiple outstanding commands, without involving the host processor. NCQ can contribute to better performance but the results are dependent on many factors, including the access patterns of the various applications and operating system functions that are initiating drive accesses. Enabling NCQ features in the hard drive requires AHCI support from the host system BIOS, controller, and driver. AHCI support is typically implemented in RAID configurations.

**NOTE:** GB = 1 billion bytes. Actual available capacity is less.



## Technical Specifications – Data Storage Drives

### HP 80-GB Solid State Drive

Unformatted Capacity	80-GB
Architecture	Multi Level Cell (MLC) NAND Flash with wear leveling 10 channel controller
Interface	Serial ATA 2.0 (3.0 Gb/s)
Dimensions (W x H x D)	2.74 x 0.37 x 4 in/6.98 x 0.95 x 10.2 cm
Weight	0.18 lb/80 g
Bandwidth Performance	<b>Sustained Sequential Read:</b> Up to 250 MB/s
	<b>Sustained Sequential Write:</b> Up to 70 MB/s
	<b>Random Read:</b> Up to 35K IOPs
	<b>Random Write:</b> Up to 6.6K IOPs
Latency	<b>Read:</b> 65-ms
	<b>Write:</b> 85-ms
Power	<b>DC power requirement:</b> 5 VDC 5%-100 mV ripple p-p
	<b>Total power consumption:</b> 0.15W (active); 0.075W (idle)
Useful Drive Life	35TB written, up to 20GB/day for 5 years
	<b>Operating Temperature:</b> 32° to 158° F (0° to 70° C)
Environmental (all conditions, non-condensing)	<b>Relative Humidity:</b> 5% to 95%
	<b>Maximum Wet Bulb Temperature (operating):</b> 84° F (29° C)
	<b>Shock:</b> 1,500 G/0.5-ms

**NOTE:**  
For solid state disk drives, GB means 1 billion bytes. 16GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity varies by content and will be less than 15.8GB.

### HP 160-GB Solid State Drive

Unformatted Capacity	160-GB
Architecture	Multi Level Cell (MLC) NAND Flash with wear leveling 10 channel controller
Interface	Serial ATA 2.0 (3.0 Gb/s)
Dimensions (W x H x D)	2.74 x 0.37 x 4 in/6.98 x 0.95 x 10.2 cm
Weight	0.18 lb/80 g
Bandwidth Performance	<b>Sustained Sequential Read:</b> Up to 250 MB/s
	<b>Sustained Sequential Write:</b> Up to 70 MB/s
	<b>Random Read:</b> Up to 35K IOPs
	<b>Random Write:</b> Up to 6.6K IOPs
Latency	<b>Read:</b> 65-ms
	<b>Write:</b> 85-ms
Power	<b>DC power requirement:</b> 5 VDC 5%-100 mV ripple p-p
	<b>Total power consumption:</b> 0.15W (active); 0.075W (idle)
Useful Drive Life	35TB written, up to 20GB/day for 5 years



## Technical Specifications – Data Storage Drives

Environmental (all conditions, non-condensing)	<b>Operating Temperature:</b> 32° to 158° F (0° to 70° C)
	<b>Relative Humidity:</b> 5% to 95%
	<b>Maximum Wet Bulb Temperature (operating):</b> 84° F (29° C)
	<b>Shock:</b> 1,500 G/0.5-ms

**NOTE:**  
For solid state disk drives, GB means 1 billion bytes. 16GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity varies by content and will be less than 15.8GB.

---

### HP 160-GB 7.2K SATA 3.0Gb/s 2.5" Hard Disk Drive

<b>Capacity</b>	160,041,885,696 bytes
<b>Rotational Speed</b>	7,200 rpm
<b>Interface</b>	Serial ATA 2.0 (3.0 Gb/s)
<b>Buffer Size</b>	16 MB
<b>Logical Blocks</b>	312,581,808
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track:</b> 2.0 ms <b>Average:</b> 12 ms <b>Full-Stroke:</b> 22 ms
<b>Height</b> (nominal)	0.374 in/9.5 mm
<b>Width</b> (nominal)	Media diameter: 2.5 in/63.5 mm Physical size: 2.75 in/70 mm
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)

---

### HP 160-GB 10K SATA 3.0Gb/s 2.5" Hard Disk Drive

<b>Capacity</b>	160,041,885,696 bytes
<b>Rotational Speed</b>	10,000 rpm
<b>Interface</b>	Serial ATA 2.0 (3.0 Gb/s)
<b>Buffer Size</b>	16 MB
<b>Logical Blocks</b>	312,581,808
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track:</b> 2.0 ms <b>Average:</b> 12 ms <b>Full-Stroke:</b> 22 ms
<b>Height</b> (nominal)	0.6 in (1.53 cm)
<b>Width</b> (nominal)	Media diameter: 2.5 in/63.5 mm Physical size: 2.75 in/70 mm
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)

---



## Technical Specifications – Data Storage Drives

### HP 250-GB 7.2K SATA 3.0Gb/s 2.5" Hard Disk Drive

Capacity	250,059,350,016 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 2.0 (3.0 Gb/s)
Buffer Size	16 MB
Logical Blocks	488,397,168
Seek Time (typical reads, includes controller overhead, including settling)	<b>Single Track:</b> 2.0 ms <b>Average:</b> 12 ms <b>Full-Stroke:</b> 22 ms
Height (nominal)	0.374 in/9.5 mm
Width (nominal)	Media diameter: 2.5 in/63.5 mm Physical size: 2.75 in/70 mm
Operating Temperature	41° to 131° F (5° to 55° C)

---

### HP 250-GB 7.2K SATA 6.0Gb/s 3.5" Hard Disk Drive

Capacity	250,059,350,016 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 3.0 (6.0 Gb/s)
Buffer Size	16 MB
Logical Blocks	488,397,168
Seek Time (typical reads, includes controller overhead, including settling)	<b>Single Track:</b> 1.0 ms <b>Average:</b> 8.5 ms <b>Full-Stroke:</b> 18 ms
Height (nominal)	1 in/2.54 cm
Width (nominal)	Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm
Operating Temperature	41° to 131° F (5° to 55° C)

---



## Technical Specifications – Data Storage Drives

### HP 300-GB 10K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive

Capacity	300,069,052,416 bytes
Rotational Speed	10,000 rpm
Interface	Serial ATA 2.0 (3.0 Gb/s)
Buffer Size	16 MB
Logical Blocks	586,072,368
Seek Time (typical reads, includes controller overhead, including settling)	<b>Single Track:</b> 0.7 ms <b>Average:</b> 4.4 ms <b>Full-Stroke:</b> 9.5 ms
Height (nominal)	0.6 in (1.53 cm)
Width (nominal)	Media diameter: 2.5 in (6.36 cm) Physical size: 2.75 in (6.99 cm)
Operating Temperature	41° to 131° F (5° to 55° C)

---

### HP 320-GB 7.2K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive

Capacity	320,072,933,376 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 2.0 (3.0 Gb/s)
Buffer Size	16 MB
Logical Blocks	488,397,168
Seek Time (typical reads, includes controller overhead, including settling)	<b>Single Track:</b> 2.0 ms <b>Average:</b> 12 ms <b>Full-Stroke:</b> 22 ms
Height (nominal)	0.374 in/9.5 mm
Width (nominal)	Media diameter: 2.5 in/63.5 mm Physical size: 2.75 in/70 mm
Operating Temperature	41° to 131° F (5° to 55° C)

---



## Technical Specifications – Data Storage Drives

### HP 500-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

Capacity	500,107,862,016 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 3.0 (6.0 Gb/s)
Buffer Size	16 MB
Logical Blocks	976,773,168
Seek Time (typical reads, includes controller overhead, including settling)	<b>Single Track:</b> 2.0 ms <b>Average:</b> 11 ms <b>Full-Stroke:</b> 21 ms
Height (nominal)	1 in/2.54 cm
Width (nominal)	Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm
Operating Temperature	41° to 131° F (5° to 55° C)

### HP 1-TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

Capacity	1,000,204,886,016 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 3.0 (6.0 Gb/s)
Buffer Size	32 MB
Logical Blocks	1,953,525,168
Seek Time (typical reads, includes controller overhead, including settling)	<b>Single Track:</b> 2.0 ms <b>Average:</b> 11 ms <b>Full-Stroke:</b> 21 ms
Height (nominal)	1 in/2.54 cm
Width (nominal)	Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm
Operating Temperature	41° to 131° F (5° to 55° C)



### Technical Specifications - Input/Output Devices

#### HP USB Standard Keyboard

Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)	
	Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in 45.8 x 16.3 x 2.5 cm	
	Weight	2 lb 0.9 kg	
Electrical	Operating voltage	+ 5VDC $\pm$ 5%	
	Power consumption	50-mA maximum (with three LEDs ON)	
	System interface	USB Type A plug connector	
	ESD	CE level 4, 15-kV air discharge	
	EMI - RFI	Conforms to FCC rules for a Class B computing device	
	Microsoft® PC 99 - 2001	Functionally compliant	
	Mechanical	Languages	38 available
Keycaps		Low-profile design	
Switch actuation		55-g nominal peak force with tactile feedback	
Switch life		20 million keystrokes (using Hasco modified tester)	
Switch type		Contamination-resistant switch membrane	
Key-leveling mechanisms		For all double-wide and greater-length keys	
Cable length		6 ft (1.8 m)	
Microsoft PC 99 - 2001		Mechanically compliant	
Acoustics		43-dBA maximum sound pressure level	
Environmental		Operating temperature	50° to 122° F (10° to 50° C)
		Non-operating temperature	-22° to 140° F (-30° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)	
	Non-operating humidity	20% to 80% (non-condensing at ambient)	
	Operating shock	40 g, six surfaces	
	Non-operating shock	80 g, six surfaces	
	Operating vibration	2-g peak acceleration	
	Non-operating vibration	4-g peak acceleration	
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence	
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence	



### Technical Specifications - Input/Output Devices

Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	
Kit contents	Keyboard	Installation Guide
	Warranty Card	Safety and Comfort Guide

#### HP PS/2 Standard Keyboard

Physical Characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
	Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
	Weight	2 lb (0.9 kg) minimum
Electrical	Operating voltage	+ 5VDC $\pm$ 5%
	Power consumption	50-mA maximum (with three LEDs ON)
	System interface	PS/2 6-pin mini din connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC 99 - 2001	Functionally compliant
Mechanical	Languages	38 available
	Keycaps	Low-profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft 1.8 m
	Microsoft PC 99 - 2001	Mechanically compliant
	Acoustics	43-dBA maximum sound pressure level
	Environmental	Operating temperature
Non-operating temperature		-22° to 140° F (-30° to 60° C)
Operating humidity		10% to 90% (non-condensing at ambient)
Non-operating humidity		20% to 80% (non-condensing at ambient)
Operating shock		40 g, six surfaces
Non-operating shock	80 g, six surfaces	



### Technical Specifications - Input/Output Devices

	<b>Operating vibration</b>	2-g peak acceleration
	<b>Non-operating vibration</b>	4-g peak acceleration
	<b>Drop (out of box)</b>	26 in (66 cm) on carpet, six-drop sequence
	<b>Drop (in box)</b>	42 in (107 cm) on concrete, 16-drop sequence
<b>Approvals</b>	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
<b>Ergonomic compliance</b>	ANSI HFS 100, ISO 9241-4, and TUVGS	

### HP USB Smart Card (CCID) Keyboard

#### Introduction:

Boost your security, simplify access procedures and reduce the costs associated with managing networks by preventing unauthorized access to your computers and networks using smartcard technology with the HP Smart Card (CCID) Keyboard.

The USB Smart Card (CCID) Keyboard is a full-sized keyboard that takes advantage of digital signatures and certificates to secure the environment for transactions performed on both public and private networks. The USB Smart Card (CCID) Keyboard works with all smart cards that comply with ISO standard 7816.

Smart cards are easy-to-use credit card-sized devices which require multiple forms of information to be validated before you gain access to your accounts or resources. Used worldwide, smart cards strengthen access to a network or other resource using dual-factor authentication. Implementing a two-factor authentication (or multi-factor authentication) process reduces the risk of unauthorized access by verifying and validating your identity in one of the following ways:

- Something you know - a combination of username and password or PIN
- Something you have - a smart card or security token.

Something you have (smart card) plus something you know (PIN), improves user-access security within corporate network environments. Smart cards are used in government agencies, healthcare companies and the finance industry.

HP ProtectTools Smart Card Manager provides authentication software for the smart card. The Smart Card Reader module works with the HP ProtectTools Security Manager and enables the user to setup, use, and manage the smart card. This allows strengthened security with HP patented technology.

#### Key Benefits:

- Protects against unauthorized access with smart card technology
- Delivers even greater security when combined with a HP ProtectTools smart card and the HP ProtectTools Security Software
- Combination of username and password or pin with a smart card or security token
- Secures online transactions using digital signatures and certificates
- Conforms to industry standards for ease of setup and use
- Delivers long product life and quiet operation with high-impact materials and lubricated keys
- Spill drain feature

<b>Physical Characteristics</b>	<b>Keys</b>	104, 105, 106, 107, 109 layout (depending upon country)
	<b>Form factor</b>	USB basic smart card keyboard
	<b>Colors</b>	Carbonite/Silver



### Technical Specifications - Input/Output Devices

Electrical	Dimensions (H x W x D)	18.2 x 6.3 x 1.3 in 46.3 x 16.1 x 3.3 cm
	Weight	2 lb (0.9 kg) minimum
	Operating voltage	+ 5VDC $\pm$ 5%
	Power consumption	100-mA maximum (with four LEDs ON)
	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
Mechanical	Microsoft PC 99 - 2001	Functionally compliant
	Languages	30+ available
	Keycaps	Standard design
	Switch actuation	55 g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
	Switch type	Contamination-resistant membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
Environmental	Cable length	6 ft (1.8 m)
	Microsoft PC 99 - 2001	Mechanically compliant
	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-22° to 140° F (-30° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
SmartCard Function	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
	Support	All ISO 7816 smart cards
	Interface	Reads from and writes to all ISO7816-1, 2, 3, 4 memory and microprocessor smart cards (T=0, T=1)
	Chipset	SCM STCIII
	Standard APIs supported	PC/SC, EMV2000, CT-API
	Power	USB Port
		Short circuit detection (protects smart card and reader)
		Power supply compliant with ISO7816 and EMV (5V, 60 mA)
		Supports 3-V and 5-V cards
	Power consumption	100-mA maximum draw



### Technical Specifications - Input/Output Devices

<b>Communication</b>	From card	9600 bps to 330,000 bps
	From computer	12 Mbps (USB transfer speed)
<b>Landing mechanism</b>	Contact device	Friction contact
	Card insertions rating	Up to 100,000 insertion cycles
<b>Interface modes</b>	CCID protocol	
<b>Reader performance interface</b>	USB connection	
<b>Electro-magnetic standards</b>	Europe	2004/108/EC
	USA	USAFCC part 15

#### Approvals

CE-Mark, UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC, EMV2000, USB-IF

#### Ergonomic Compliance

ISO 9241-4, TUVGS

#### Kit Contents

Keyboard, I/O Security and Documentation CD, warranty card

#### Smart Card Compatibility

HP	HP ProtectTools Smart Card
American Express	Amex Blue
Axalto (Schlumberger)	Cryptoflex 8K Cryptoflex 16K Cryptoflex 32K Cryptoflex 32K e-gate Cyberflex Access 64K Cyberflex Access 32K Cyberflex 32K e-gate Cyberflex 64K Cyberflex Palmera Payflex-S Payflex 1K Payflex 2K Payflex 4K Payflex 8K Prismera US DoD CAC PrimeFlex Store 8K PrimeFlex Store 2K
Cardlogix	CLXSU004KK4 CLXSU008KK5
Safenet, Inc.	Model 300 Model 330
De-La Rue	VisaCash
Gemplus	Gem Espresso GKK32K Gemclub Memo GemClub Micro GemXplore GemSafe
Infineon	SLE66C322P SLE4406 SLE4406E SLE4406E SE SLE4418



## Technical Specifications - Input/Output Devices

	SLE4428
	SLE4432
	SLE4436E
	SLE4442
	SLE5536
SafLink (Litronic)	Forte
Shart	Java Card
Oberthur	CosmopolIIC v4
	CosmopolIIC v4.1
	Cosmo ID-One
	GalatIIC v2.1
	US DoD CAC
Memory Cards	
Atmel	AT24C01ASC
	AT24C02SC
	AT24C04SC
	AT24C08SC
	AT24C16SC
	AT24C32SC
	AT24C64SC
	AT24C128SC
	AT24C256SC
	AT24C512SC
	AT88SC153
	AT88SC1608
ISSI	IS23SC4418
	IS23SC4428
ST	14C02
Telefonkarte	SLE4406
	SLE4436
	SLE5536
XICOR	X24026

---

### HP USB & PS2 Washable Keyboard

Physical Characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
	Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in 45.8 x 16.3 x 2.5 cm
	Weight	2 lb (0.9 kg) minimum
Electrical	Operating voltage	+ 5VDC $\pm$ 5%
	Power consumption	50-mA maximum (with three LEDs ON)
	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device



### Technical Specifications - Input/Output Devices

Mechanical	Microsoft® PC 99 - 2001	Functionally compliant
	Keycaps	Stepped -profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes
	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	7 ft 2.2 m
Environmental	Microsoft PC 99 - 2001	Mechanically compliant
	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122° F 10° to 50° C
	Non-operating temperature	-4° to 149° F -20° to 65° C
	Operating humidity	10% to 95% (non-condensing at ambient)
	Non-operating humidity	0% to 95% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
	Approvals	UL, cUL, FCC, CE, TUV GS, VCCI, BSMI, C-Tick, KCC, USB-IF, WHQL, EN/IEC 60601-1, IP66/NEMA4X
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	

---

### HP PS/2 Optical Mouse

Dimensions (H x L x W)	1.56 x 2.44 x 4.61 in	
	3.95 x 6.21 x 11.7 cm	
Weight	4.44 oz	
	126 g	
Environmental	Operating temperature	-32° to 104°F 0° to 40° C



### Technical Specifications - Input/Output Devices

	Non-operating temperature	-4° to 140°F -20° to 60° C
	Operating humidity	10% to 90% (non condensing at ambient)
	Non-operating humidity	10% to 90% (non condensing at ambient)
	Operating shock	40 g, 6 surfaces
	Non-operating shock	80 g, 6 surfaces
	Operating vibration	2 g peak acceleration
	Non-operating vibration	4 g peak acceleration
	Drop (out of box)	80 cm height onto asphalt tile over concrete or equivalent, 5- drop in 5 direction except the cable face
Electrical	Operating voltage	5 VDC $\pm$ 10%
	Power consumption	100mA
	System consumption	PS/2 mini-din connector
	ESD	CE level 4, 15 kV air discharge
	EMI-RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC99 - 2001	Functionally compliant
Mechanical	Resolution	400 $\pm$ 20% DPI
	Tracking speed	10 in/s (25.4 cm/s) maximum
	Acceleration	100 in/s/s (2.54 m/s/s)
	Switch actuation	61 g nominal peak force
	Switch life	3,000,000 operations (using Hasco modified tester)
	Switch type	Low force micro-switches
	Tracking mechanism life	155 mi (250 km) at average speed of 10 in/s
	Cable length	6 ft (1.8 m)
	Microsoft PC99 - 2001	Mechanically compliant
Scroll wheel	Width	8 mm
	Diameter	1.01 in (25.6 mm)
	Maximum rotation speed	48 rats/sec
	Switch type	Light force micro-switch
	Switch life	1 million operations
	Mechanical life	Minimum 200,000 revolutions



## Technical Specifications - Input/Output Devices

Regulatory Approvals           UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC

---

### HP USB Optical Mouse

<b>Dimensions</b> (H x L x W)	1.5 x 4.5 x 2.5 in 3.8 x 11.6 x 6.3 cm
<b>Weight</b>	0.27 lb 0.12 kg
<b>Cable length</b>	72.8 in 185 cm
<b>System requirements</b>	Microsoft Windows 95, 98, 2000, Me, XP and Vista Available USB port

---

### HP USB Laser Mouse

<b>Scroll Wheel</b>	24
<b>Maximum Rotation Speed</b>	48 rats/sec
<b>Switch Type</b>	Wheel
<b>Switch Life</b>	Button – 3,000,000 Wheel – 1,000,000 times Tilt switch – 500,000 times
<b>Environmental</b>	<b>Operating Temperature</b> 32° to 104° F 0° to 40° C <b>Non-operating Temperature</b> -4° to 140° F -20° to 60° C <b>Operating Humidity</b> 10% to 90% (non-condensing at ambient) <b>Non-operating Humidity</b> 20% to 80% (non-condensing at ambient) <b>Operating Shock</b> 40 g, six surfaces <b>Non-operating Shock</b> 80 g, six surfaces <b>Operating Vibration</b> 2-g peak acceleration <b>Non-operating Vibration</b> 4-g peak acceleration
<b>Electrical</b>	<b>Operating Voltage</b> + 5VDC ± 5% <b>Power Consumption</b> <b>MTBF</b> > 150,000 hrs



## Technical Specifications - Input/Output Devices

	ESD	IEC-61000-4-2 criteria B, Contact discharge: +/- 4kV, Air discharge: +/- 8kV
	EMI-RFI	FCC Class B
	PC98	PC 99 Compliant
Mechanical	Resolution	800dpi
	Tracking Speed	25 cm/sec
	Acceleration	0.5mm
	Switch Actuation	0.6N (60gf)
	Switch Life	Button - 3,000,000 Wheel - 1,000,000 times Tilt switch - 500,000 times
	Cable Length	1850mm
	PC98-99	PC99 compliant
Regulatory Approvals		UL60950-1, UL 94, UL 746 (A-E), UL 796 TUV/GS: EN 60950-1, EN 60825-1 FCC Class B, UL 1950, cUL, TUV GS, CE, C-tick, VCCI, BSMI, RRL



## Technical Specifications - Removable Storage

### HP Blu-ray Writer Drive

<b>AMO Part Number</b>	AR482AA	
<b>Height</b>	5.25-inch, half-height, tray-load	
<b>Orientation</b>	Either horizontal or vertical	
<b>Interface type</b>	SATA	
<b>Disc capacity</b>	50 GB DL or 25 GB standard	
<b>Dimensions (W x H x D)</b>	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 19.0 cm)	
<b>Weight (max)</b>	2.0 lb (907 g)	
	<b>DVD-ROM</b>	8.5GB DL or 4.7GB standard
	<b>Blu-ray</b>	50GB DL or 25GB standard
	<b>Full Stroke DVD</b>	< 250 ms (seek)
	<b>Full Stroke CD</b>	< 210 ms (seek)
	<b>Blu-ray</b>	< 275 ms (seek)
		(Time to drive ready from tray loading)
<b>Disc Capacity</b>	<b>BD-ROM (SL/DL)</b>	25S / 28S
	<b>BD-R (SL/DL)</b>	25S / 28S
	<b>BD-RE (SL/DL)</b>	25S / 28S
	<b>DVD-ROM (SL/DL)</b>	18S / 18S
	<b>Startup Time</b>	<b>DVD-R (SL/DL)</b> 25S / 25S
		<b>DVD-RW</b> 25S
		<b>DVD+R (SL/DL)</b> 25S / 25S
		<b>DVD+RW</b> DVD+RW 25S
		<b>DVD-RAM</b> 45S
		<b>CD-ROM</b> 15S
	<b>CD-ROM Read</b>	CD-ROM up to 40X
		CD-R up to 40X
		CD-RW up to 40X
	<b>DVD-ROM Read</b>	DVD-RAM up to 5X
		DVD+RW up to 10X
		DVD-RW up to 10X



## Technical Specifications - Removable Storage

		DVD+R DL up to 8X
		DVD-R DL up to 8X
<b>Maximum Data Transfer Rates</b>		DVD-ROM up to 16X
		DVD-ROM DL up to 8X
		DVD+R up to 12X
		DVD-R up to 12X
	<b>Blu-ray</b>	BD-ROM up to 6X
		BD-ROM DL up to 4.8X
		BD-R up to 6X
		BD-R DL up to 4.8X
		BD-R up to 6X
		BD-RE SL/DL up to 4.8X
<b>Power</b>	<b>Source</b>	SATA DC power receptacle
	<b>DC Power Requirement</b>	5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 5%-200 mV ripple p-p
	<b>DC Current</b>	5 VDC -1000 mA typical, 1600 mA maximum 12 VDC -600 mA typical, 1400 mA maximum
<b>Environmental</b> (all conditions non-condensing)	<b>Temperature (operating)</b>	41° to 122° F (5° to 50° C)
	<b>Relative Humidity (operating)</b>	10% to 90%
	<b>Maximum Wet Bulb Temperature (operating)</b>	86° F (30° C)

## HP SuperMulti DVD Writer Drive

<b>AMO Part Number</b>	AR630AT	
<b>Height</b>	5.25-inch, half-height, tray-load	
<b>Orientation</b>	Either horizontal or vertical	
<b>Interface type</b>	Serial ATA	
<b>Dimensions (W x H x D)</b>	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)	
<b>Weight (max)</b>	2.6 lb (1.2 kg)	
	<b>CD Media Read Access</b>	Random < 120 ms typical
		Full Stroke < 200 ms typical
	<b>DVD Media Read Access</b>	Random < 130 ms typical
		Full Stroke < 240 ms typical
		CD-ROM, CD-R Read Up to 6000 KB/s (40X)
		CD-RW Read Up to 4800 KB/s (32X)



Technical Specifications - Removable Storage

Performance

		Digital/Analog Audio Playback	Up to 2400 KB/s (16X)
	CD Media Read Transfer	Digital Audio Extraction (CD-ROM, CD-R)	Up to 6000 KB/s (40X)
		Digital Audio Extraction (CD-RW)	Up to 4800 KB/s (32X)
		Video CD Playback	Up to 2400 KB/s (16X)
		DVD-ROM SL Read	Up to 21600 KB/s (16X)
		DVD-ROM DL Read	Up to 10800 KB/s (8X)
		DVD Video Playback	Up to 10800 KB/s (8X)
		DVD Video SL (other than playback)	Up to 21600 KB/s (16X)
	DVD Media Read Transfer	DVD Video DL (other than playback)	Up to 10800 KB/s (8X)
		DVD-R	Up to 21600 KB/s (16X)
		DVD+R	Up to 21600 KB/s (16X)
		DVD-RW	Up to 10800 KB/s (8X)
		DVD-R DL	Up to 10800 KB/s (8X)
		DVD+RW	Up to 10800 KB/s (8X)
		CD-R Write	Up to 6000 KB/s (40X)
		CD-RW	600 KB/s (4X)
	CD Media Write Transfer	CD-RW (High speed)	1500 KB/s (10X)
		CD-RW (Ultra speed)	Up to 3600 KB/s (24X)
		CD-RW (Ultra speed+)	Up to 4800 KB/s (32X)
		DVD+R	Up to 21600 KB/s (16X)
		DVD+R DL (v1.2)	Up to 16200 KB/s (12X)
		DVD+R DL (v1.1)	Up to 10800 KB/s (8X)
		DVD+RW (Volume 2 v1.0)	Up to 10800 KB/s (8X)
		DVD+RW (Volume 1 v1.3)	Up to 5400 KB/s (4X)
		DVD-R (v2.1 rev. 6.0)	Up to 16200 KB/s (12X)
	DVD Media Write Transfer	DVD-R (v2.1 rev. 4.0)	Up to 21600 KB/s (16X)
		DVD-R DL (v3.0 rev. 5.0)	Up to 10800 KB/s (8X)
		DVD-R DL (v3.0 rev. 3.0)	Up to 10800 KB/s (8X)
		DVD-RW (v1.2 rev. 3.0)	8100 KB/s (6X)
		DVD-RW (v1.2 rev. 2.0)	Up to 5400 KB/s (4X)
		DVD-RAM (v2.2 rev. 5.0)	Up to 16200 KB/s (12X)
		DVD-RAM (v2.2 rev. 2.0)	Up to 6750 KB/s (5X)
		<b>Media</b>	<b>Read</b> <b>Write</b>
		CD-ROM	Yes No
		CD-R	Yes No
		CD-RW	Yes No
		DVD-ROM	Yes No



## Technical Specifications - Removable Storage

<b>Media Compatibility</b>	DVD-ROM DL	Yes	No
	DVD-RAM	Yes	No
	DVD+R	Yes	No
	DVD+R DL	Yes	No
	DVD+RW	Yes	No
	DVD-R	Yes	No
	DVD-RW	Yes	No
	DVD-R DL	Yes	No
<b>Power Supply</b>	Source	SATA DC power receptacle	
	DC Power Requirement	5 VDC $\pm$ 5%	100 mV ripple p-p
		12 VDC $\pm$ 5%	200 mV ripple p-p
	DC Current	5 VDC	< 1000 mA (typical) 1600 mA (max.)
		12 VDC	1200 mA (typical) 2000 mA (max.)
	Total Drive Power (Standby Mode)	< 2.5W	
<b>Rear Panel</b>	SATA Power Connector, 15-pin		
	SATA Data Connector, 7-pin		
<b>Environmental conditions</b> (all conditions non-condensing)	Markings to identify each connector		
	Temperature (operating)	41° to 122° F (5° to 50° C)	
	Temperature (storage)	-22° F to 140° F (-30° C to 60° C)	
	Relative Humidity	10% to 90%	
	Maximum Wet Bulb Temperature	86° F (30° C)	
	Altitude	0 to 10,171 ft. (0 to 3,100 meters)	

## HP DVD-ROM Drive

<b>AMO Part Number</b>	AR629AA		
<b>Height</b>	5.25-inch, half-height, tray-load		
<b>Orientation</b>	Either horizontal or vertical		
<b>Interface type</b>	Serial ATA		
<b>Dimensions (W x H x D)</b>	5.8 x 1.7 x 6.9 in (14.8 x 4.2 x 17.5 cm)		
<b>Weight (max)</b>	2.1 lb (950 kg)		
CD Media Read Access	Random	< 120 ms typical	
	Full Stroke	< 200 ms typical	
DVD Media Read Access	Random	< 130 ms typical	
	Full Stroke	< 240 ms typical	
	CD-ROM, CD-R Read	Up to 6000 KB/s (40X)	



## Technical Specifications - Removable Storage

Performance	CD Media Read Transfer	CD-RW Read	Up to 4800 KB/s (32X)	
		Digital/Analog Audio Playback	Up to 2400 KB/s (16X)	
		Digital Audio Extraction (CD-ROM, CD-R)	Up to 6000 KB/s (40X)	
		Digital Audio Extraction (CD-RW)	Up to 4800 KB/s (32X)	
		Video CD Playback	Up to 2400 KB/s (16X)	
		DVD-ROM SL Read	Up to 21600 KB/s (16X)	
		DVD-ROM DL Read	Up to 10800 KB/s (8X)	
		DVD Video Playback	Up to 10800 KB/s (8X)	
		DVD Video SL (other than playback)	Up to 21600 KB/s (16X)	
		DVD Video DL (other than playback)	Up to 10800 KB/s (8X)	
		DVD-R	Up to 21600 KB/s (16X)	
		DVD+R	Up to 21600 KB/s (16X)	
		DVD-RW	Up to 10800 KB/s (8X)	
		DVD-R DL	Up to 10800 KB/s (8X)	
DVD+RW	Up to 10800 KB/s (8X)			
Media Compatibility	Media	CD-ROM	Yes	No
		CD-R	Yes	No
		CD-RW	Yes	No
		DVD-ROM	Yes	No
		DVD-ROM DL	Yes	No
		DVD-RAM	Yes	No
		DVD+R	Yes	No
		DVD+R DL	Yes	No
		DVD+RW	Yes	No
		DVD-R	Yes	No
		DVD-RW	Yes	No
		DVD-R DL	Yes	No
		Source	SATA DC power receptacle	
		DC Power Requirement	5 VDC ± 5%	100 mV ripple p-p
12 VDC ± 5%	200 mV ripple p-p			
5 VDC	1000 mA (typical) 1600 mA (max.)			
Power Supply	DC Current	12 VDC	1200 mA (typical) 2000 mA (max.)	
	Total Drive Power (Standby Mode)	< 2.5W		



## Technical Specifications - Removable Storage

Rear Panel	SATA Power Connector, 15-pin	
	SATA Data Connector, 7-pin	
	Markings to identify each connector	
Environmental conditions (all conditions non-condensing)	Temperature (operating)	41° to 122° F (5° to 50° C)
	Temperature (storage)	-22° F to 140° F (-30° C to 60° C)
	Relative Humidity	10% to 90%
	Maximum Wet Bulb Temperature	86° F (30° C)
	Altitude	0 to 10,171 ft. (0 to 3,100 meters)

## HP 22-n-1 Media Card Reader

USB Interface	USB 2.0 High-speed interface
	<b>NOTE:</b> Requires the USB cable to be connected to the internal USB 2.0 port or a USB 2.0 PCI card.
Advance protocol support	Supports hardware ECC (Error Correction Code) function
	Supports hardware CRC (Cyclic Redundancy Check) function
	Supports MS 4-bit parallel transfer mode
	Supports MS-PRO 4-bit parallel transfer mode
	Supports MS PRO-HG Duo 4-bit parallel transfer mode
	Supports SD 4-bit parallel transfer mode
	Supports high-speed 50Mhz SD 4-bit card (version 2.0)
	Supports high-speed 52Mhz MMC 8-bit card (version 4.2)
	Supports CF v4.0 with PIO mode 6 and Ultra DMA mode
	CompactFlash Type I
	CompactFlash Type II
	Microdrive
MultiMediaCard (MMC)	
Reduced Size MultiMediaCard (RS MMC)	
MultiMediaCard 4.2 (MMC Plus, including MMC Plus HC)	
Reduced Size MultiMediaCard 4.2 (MMC Mobile, including MMC Mobile HC)	
Secure Digital Card (SD)	
Secure Digital High Capacity (SDHC)	



## Technical Specifications - Removable Storage

<b>Supported media type</b>	miniSD
	miniSD High Capacity
	Micro SD (T-Flash)
	Micro SD HC
	Memory Stick
	Memory Stick Select
	Memory Stick Duo (MS Duo)
	Memory Stick PRO (MS PRO)
	Memory Stick PRO Duo (MS PRO Duo)
	Memory Stick PRO-HG Duo
	MagicGate Memory Stick (MG)
	MagicGate Memory Stick Duo
	xD-Picture Card
<b>Supported media type with card adapter</b>	Memory Stick Micro (M2)
	MMC Micro



### Technical Specifications - Eco Data

#### Eco-Label Certifications & declarations

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US ENERGY STAR ®
- IT ECO declaration
- EPEAT Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country

#### Small Form Factor

Energy Consumption (typically configured)	115 VAC	230 VAC	100 VAC
Normal Operation	30.9181 W	31.1382 W	30.9441 W
Sleep (Energy Star low power mode)	2.0709 W	2.2871 W	2.0928 W
Off	0.8967 W	1.0717 W	0.8803 W

**NOTE:** Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family . HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured model.

Heat Dissipation (typically configured)*	115 VAC	230 VAC	100 VAC
Normal Operation	106 BTU/hr	106 BTU/hr	106 BTU/hr
Sleep	7 BTU/hr	7 BTU/hr	7 BTU/hr
Off	3 BTU/hr	3 BTU/hr	3 BTU/hr

\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

#### Declared Noise Emissions

(in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.8	28
Fixed Disk (random writes)	3.8	28

#### Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight:

#### Battery Size

CR2032 (coin cell)

#### Battery type

Li-Ion

#### Additional Information

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.



### Technical Specifications - Eco Data

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

This product contains 0.04% post consumer recycled plastic (by wt.)

This product is 93.8% recyclable when properly disposed of at end of life.

#### Packaging Materials

External Corrugated - 1966 g  
Internal Polyethylene low density foam - 154 g

The corrugated packaging material contains at least 38.38% recycled content.

The Polyethylene low density Foam packaging material contains at least 60.42% recycled content.

---

### Microtower

Energy Consumption (typically configured)	115 VAC	230 VAC	100 VAC
Normal Operation	31.8271 W	32.8944 W	31.7856 W
Sleep (Energy Star low power mode)	2.0348 W	2.2596 W	2.0193 W
Off	0.8515 W	1.0293 W	0.8358 W

**NOTE:** Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured model.

Heat Dissipation (typically configured)*	115 VAC	230 VAC	100 VAC
Normal Operation	109 BTU/hr	112 BTU/hr	109 BTU/hr
Sleep	7 BTU/hr	8 BTU/hr	7 BTU/hr
Off	3 BTU/hr	4 BTU/hr	3 BTU/hr

\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.



### Technical Specifications - Eco Data

#### Declared Noise Emissions

(in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.9	28
Fixed Disk (random writes)	3.9	28

#### Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater than 5ppm by weight
- Cadmium greater than 10ppm by weight:

#### Battery Size

CR2032 (coin cell)

#### Battery type

Li-Ion

#### Additional Information

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

This product contains 0.13% post consumer recycled plastic (by wt.)

This product is 92.4% recyclable when properly disposed of at end of life.

#### Packaging Materials

External Corrugated Carton - 1950 g

Internal Polyethylene low density foam - 205 g

The corrugated packaging material contains at least 31.38% recycled content.

The Polyethylene low density Foam packaging material contains at least 60.42% recycled content.

### All Models

#### RoHS Compliance

Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).

#### Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at:



## Technical Specifications - Eco Data

[http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen\\_specifications.html](http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html)):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

### Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

### End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

### Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:  
Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/>



## Technical Specifications - Eco Data

[ecolabels.html](#)

ISO 14001 certificates:

[http://www.hp.com/hpinfo/globalcitizenship/environment/operations/  
envmanagement.html](http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html)

---

Copyright © 2011 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows, Windows 7, and Windows Vista are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel, Core 2 Quad, Core 2 Duo, Pentium and Celeron are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

