

# Installation instructions

## Whole house water filter

### A replacement for the following water filter:

#### Aqua pure® filter

AP810

**Filter life:** up to 6 months, whichever comes first will vary based on water condition.

#### Filter features:


- Economical alternative to expensive substitutes.
- Easy installation and operation.
- Provides cleaner, fresher water by reducing impurities.
- Designed to provide up to 6 months of life.
- Does not remove minerals which may be beneficial to health.

#### Operating specifications:

Minimum operating temperature.....	4.4°C/40°F
Maximum operating temperature.....	38°C/100°F
Min. working pressure.....	70 kPa/10 psi
Max. working pressure.....	689 kPa/100 psi
Flow rate.....	66 lpm/20 gpm

#### Installation instructions

1. Turn off incoming water by isolating unit with existing valves on water distribution system.
2. Bleed pressure from the unit by depressing the red button on the top of the unit.
3. Remove housing by sliding wrench up toward head then turn left to unscrew.
4. Wipe housing clean and insert new cartridge.
5. Lubricate o-ring and screw housing into head.
6. Turn water back on.

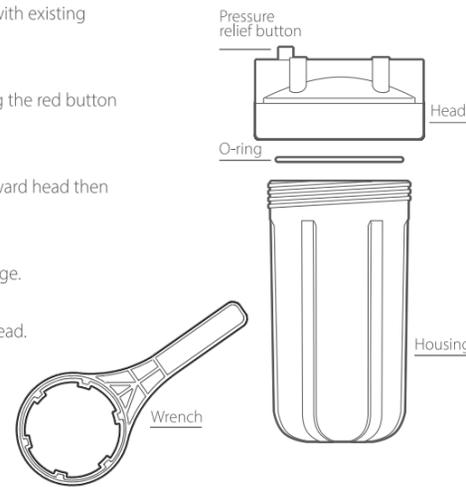

8089A V040

140mm

210mm

#### ⚠ Caution:

This filter should not be used with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

#### Storage and maintenance:

- Stored filters do not expire. Keep your unused filters in a cool, dark, and dry place until you need them.
- If you do not use your filter for more than four days, run two gallons of water before using it to prevent bad tasting water.

#### Frequently asked questions:

- Q:** Do I need to remove the filter prior to descaling equipment?  
**A:** Yes, remove filter prior to descaling and inspect for integrity if needed replace with a new filter.
- Q:** If I do not change my filter every 6 months, can this damage the system?  
**A:** Yes, you must replace the filter every 6 months or sooner if water flow is reduced or if there is heavy sediment/rust present. Filters left in longer will fatigue, degrading filter performance.

#### ⚠ Warning:

To reduce the risk of property damage due to water leakage, the filter MUST be installed in accordance with the manufacture's specifications and instructions. This filter unit must be replaced every 6 months. Failure to follow instructions and operating specifications will void your warranty. What's more, manufacturer assumes no responsibility or liability for damage arising out of misuse of the product. Aqua Pure® is a registered trademark of 3M Company. Aqua Pure® is used for reference purposes only.

\*The service life mentioned above is subject to chlorine reduction. Actual result varies according to the local water quality.

#### Manufacturer Technical Support

Tel: 1-888-352-3558 (U.S.)

E-mail: service@water-filter.com



Made in China V040  
 Qingdao Ecopure Filter Co., Ltd.



图像颜色请依据数码稿印刷  
 请不要擅自变更来稿件, 如须修改, 请联系伊可普做有关决定

#### 印刷品技术要求 IMPORTANT PRINTING CAUTION

1. 印刷要求 覆光膜 覆亚膜 UV油 吸塑油 过油 丝印
2. 材质要求 80g双胶纸, 双面印刷
3. 颜色要求 单黑印刷
4. 版面要求 印刷品文字线条印迹清晰、无重影; 印刷品套印准确无偏色、溢墨、指痕等; 印刷品上光层均匀、光亮、牢固无粘连; 覆膜表面平整、无褶皱、光泽度好; 纸张材质正确, 切边整齐、压线深浅适中、洁净、无斑点和条纹。

#### 版式设计要求:

1. 字体: 标题为Myriad Pro SemiBold, 内容为 Myriad Pro light;
2. 上下页边距为9mm, 左右边距为8mm;;
3. 标注说明书长宽尺寸, 单位mm.

伊可普		青岛伊可普电器有限公司包材设计图纸	
品牌BRAND NAME.		工厂型号ITEM NO.	EWF-8089
物料编码INNER CODE.	03070008089A	版本号VERSION.	V040
包材文件名称FILE NAME.	03070008089A EWF-8089A-说明书-V040		
规格MEASURE.	210*140mm	页数PAGE.	2P
设计负责人DWG.BY.	张鑫龙	审核日期VERIFY DATE.	
变更日期REVISONS.	2021.11.17		
变更描述DESCRIPTION.	1.增加24H7D365客服信息		