ISLAND

Enjoy unobstructed views of your kitchen with the modern, minimalist lines of the Lux. This sleek hood includes a wireless remote control, and it discreetly mounts into the ceiling above your range or cooktop for power and good

looks combined. Your kitchen will stay clean and smoke free with the Lux's Perimeter Aspiration and multiple blower options, and the tri-level LED light strip ensures a good-looking glow. Available in White and Stainless Steel.






63" Stainless Steel




43" White




Wireless Remote Control



Front*

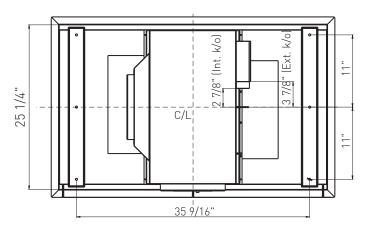

Top

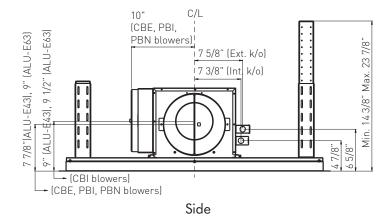

*ALU-E43 has 2 panels, ALU-E63 has 3 panels



MODEL								
Stainless Steel	ALU-E43ASX		ALU-E63ASX					
White	ALU-E43AWX			ALU-E63AWX				
Size 43"			63"					
PERFORMANCE								
Internal Blower (CBI-290A)*	200-290 CFM, 1.4-3 sones		200-290 CFM, 1.4-3 sones					
Internal Blower (CBI-600A)*	240-600 CFM, 1.8-6 sones		240-600 CFM, 1.8-6 sones					
Internal Blower (PBI-1100A)*	500-1,100 CFM, 3.5-8 sones		500-1,100 CFM, 3.5-8 sones					
In-Line Blower (PBN-1000A)*	500-1,000 CFM, sones NA		500-1,000 CFM, sones NA					
External Blower (CBE-1000)*	500-1,000 CFM, sones	NA	500-1,000 CFM, sones NA					
FEATURES								
Controls	Capacitive Touch		Capacitive Touch					
Speed Levels	3		3					
Auto Delay-Off	Yes		Yes					
CleanAir Function**	Yes		Yes					
Lighting	LED Strip x 3 (8.5W)		LED Strip x 4 (8.5W)					
Tri-Level Lighting	Yes		Yes					
Filters	Aluminum Mesh x4		Aluminum Mesh x6					
Wireless Remote Control	Yes, RF		Yes, RF					
Recirculating***	Yes		Yes					
DUCT SPECIFICATIONS								
Vertical Blower	NA		NA					
Horizontal Internal Blower	6"(CBI),10"(PBI)		6"(CBI),10"(PBI)					
Horizontal In-Line/External Blower	10"		10"					
AC POWER								
Hood w/ CBI-290A	120V, 60Hz, Max. 1.05A		120V, 60Hz, Max. 1.05A					
Hood w/ CBI-600A	120V, 60Hz, Max. 3.05A		120V, 60Hz, Max. 3.05A					
Hood w/ PBI-1100A	120V, 60Hz, Max. 5.75A		120V, 60Hz, Max. 5.75A					
Hood w/ PBN-1000A	120V, 60Hz, Max. 5.75A		120V, 60Hz, Max. 5.75A					
Hood w/ CBE-1000	120V, 60Hz, Max. 6.55A	١	120V, 60Hz, Max. 6.55A					
OPTIONAL ACCESSORIES								
Recirculating Kit	ZRC-00LX			ZRC-00LX				
Make-Up Air Kit	MUA006A (600 CFM)		MUA006A (600 CFM)					
	MUA008A (1,000 CFM)		MUA008A (1,000 CFM)					
	MUA010A (1,100 CFM)		MUA010A (1,100 CFM)					
MOUNTING HEIGHT RANGE [†]	48" - 72"		48" - 72"					
WARRANTY	1 year parts, 1 year labor		1 year parts, 1 year labor					
CEILING HEIGHT	7′	7.5′		8′		8.5'	9'	
MOUNTING HEIGHT [†]	48	56"		60"		66"	72"	
	1					1		



^{*}Blower sold separately.

**CleanAir turns your hood on once every four hours for 10 minutes on speed one.

***Recirculating kit is only compatible with CBI-290A and CBI-600A blowers.

*Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.