



 JENN-AIR®  
PRODUCT GALLERY





## A LEGACY OF LUXURY

Jenn-Air brand is synonymous with high-end kitchen appliances that offer sophisticated design, innovative technology and exceptional performance.

First recognized for creating the legendary downdraft cooktop and bringing convection cooking into the home, Jenn-Air brand makes exceptional appliances for the entire kitchen – from powerful, professional-style ranges to stylish, built-in refrigerators.

Jenn-Air brand showcases uncompromising innovation with a mobile app that brings WiFi connectivity to select wall ovens and freestanding refrigerators.

A refreshed line of cooktops includes new electric, gas and induction downdraft cooktops, and 15-inch cooktop modules that promote new options for open concept kitchens. Our exclusive Obsidian interior finish, which is available on all built-in refrigerators, has now been extended to our connected freestanding refrigerators.

Our appliances offer unprecedented performance while cooking and entertaining. Because details matter, Jenn-Air brand will never settle for the ordinary when the extraordinary can be achieved.

# DIRECTORY

## Style Suites

6



## Coffee

### Built-In Coffee System

20

#### Model Lineup

22

#### Comparison Chart

23



## Cooking

### Wall Ovens

24

#### Model Lineup

26

#### Comparison Charts

31



### Steam and Convection Wall Oven

34

#### Model Lineup

36

#### Comparison Chart

37



### Pro-Style® Rangetops

38

#### Model Lineup

40

#### Accessories

42

#### Comparison Charts

43



### Downdraft Cooktops

44

#### Model Lineup


46

#### Accessories

48

#### Comparison Charts

49



### Cooktops

52

#### Model Lineup

54

#### Accessories

60

#### Comparison Charts

61



### Pro-Style® Ranges

66

#### Model Lineup

68

#### Accessories

74

#### Comparison Charts

75



### Downdraft Ranges

78

#### Model Lineup

80

#### Accessories

82

#### Comparison Charts

83



### Ranges

84

#### Model Lineup

86

#### Accessories

88

#### Comparison Charts

89



### Microwave Ovens

90

#### Model Lineup

92

#### Accessories

95

#### Comparison Charts

96

## Cooking (Continued)

### Warming Drawers

98

#### Model Lineup

100

#### Accessory

100

#### Comparison Chart

101



### Ventilation

102

#### Model Lineup

104

#### Accessories


111

#### Comparison Charts

113

#### Ventilation Pairings Charts

119



## Refrigeration

### Built-In Refrigerators

124

#### Model Lineup

126

#### Panel Kits


127

#### Accessories

130

#### Comparison Charts

131

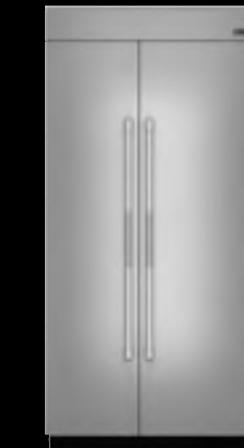

### Freestanding Refrigerators

134

#### Model Lineup

136

#### Accessories

140

#### Comparison Charts

141



### Under Counter Refrigeration

146

#### Model Lineup


148

#### Accessories

152

#### Comparison Charts

154



## Dishwashers

### Dishwashers

158

#### Model Lineup

160

#### Comparison Charts

162



## Compactors

### Compactors

164

#### Model Lineup

166

#### Panel Kit

166

#### Comparison Chart

167



## Appendix

### Sources

168

### Warranty

170




## **EURO-STYLE STAINLESS STEEL**

Appliances in the Jenn-Air® Euro-Style Stainless kitchen suite combine modern aesthetics and classic flair. Crafted with simple, graceful lines, this extensive collection captures the sophistication of stainless steel.

The elegant, uninterrupted design is just one part of the story. Homeowners will enjoy exceptional performance that stirs the senses – and their creativity.

Design highlights of the Euro-Style suite include slightly curved, stainless steel handles and subtle, embossed lettering.

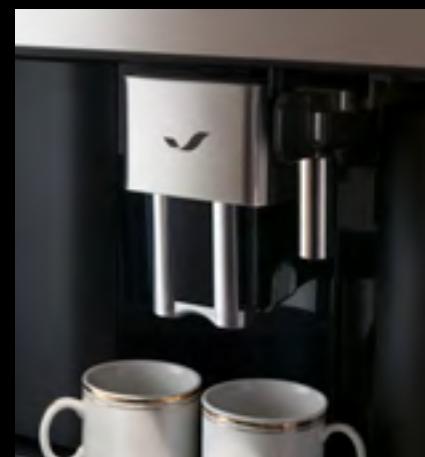

# EURO-STYLE STAINLESS PRODUCTS

## Built-In Coffee System

24"	Built-In Coffee System	JBC7624BS	22
-----	------------------------	-----------	----

## Wall Ovens

30"	Double with V2™ Vertical Dual-Fan Convection System	JJW3830DS	26
30"	Double with MultiMode® Convection System	JJW2830DS	26
27"	Convection System	JJW2827DS	
30"	Double with MultiMode® Convection System	JJW2730DS	27
27"	(Upper Oven)	JJW2727DS	
30"	Microwave/Wall Oven with V2™ Vertical Dual-Fan Convection System	JMW3430DS	28
30"	Microwave/Wall Oven with MultiMode® Convection System	JMW2430DS	
27"	JMW2427DS		29
30"	Single with V2™ Vertical Dual-Fan Convection System	JJW3430DS	30
30"	Single with MultiMode® Convection System	JJW2430DS	30
27"	JJW2427DS		

## Steam and Convection Wall Oven

24"	Steam and Convection Wall Oven	JBS7524BS	36
-----	--------------------------------	-----------	----

## Downdraft Cooktops

36"	JX3™ Gas Downdraft	JGD3536GS	
30"	JGD3430GS		46
36"	Induction Downdraft	JID4436ES	46
36"	JX3™ Electric Radiant Downdraft with Glass-Touch Electronic Controls	JED4536GS	
30"	JED4430GS		47
36"	JX3™ Electric Radiant Downdraft	JED3536GS	
30"	JED3430GS		47

## Cooktops

36"	Glass 5-Burner Gas	JGC2536EB	
30"	JGC2530EB		54
36"	Gas	JGC7636BS	55
30"	JGC7530BS		55
36"	JGC3536GS		56
30"	JGC3530GS		56
15"	2-Burner Modular Gas	JGC3215GS	56
15"	Single-Burner Modular Gas with Wok Ring	JGC3115GS	56
15"	Modular Electric Griddle	JEF3115GS	57

## Cooktops (continued)

15"	Modular Induction	JIC4715GS	57
15"	Modular Induction Wok	JIE4115GS	57
4"	Modular Downdraft Vent	JVD0303GS	57
36"	Induction	JIC4536XS	
30"	JIC4430XS		58
36"	Electric Radiant with Glass-Touch Electronic Controls	JEC4536BS	59
30"	JEC4430BS		59
36"	Electric Radiant	JEC3536BS	59
30"	JEC3430BS		59

## Downdraft Ranges

30"	Dual-Fuel	JDS1750FS	80
30"	Electric Radiant	JES1750FS	81
Ranges			
30"	Dual-Fuel	JDS1450FS	86
30"	Gas	JGS1450FS	86
30"	Induction	JIS1450DS	87
30"	Electric Radiant	JES1450FS	87

## Microwave Ovens

30"	Built-In with Speed-Cook	JMC2430DS	92
27"	Built-In with Speed-Cook	JMC2427DS	92
24"	Under Counter with Drawer Design	JMD2124WS	92
25"	Built-In/Countertop	JMC3415ES	93
22"	Built-In/Countertop	JMC1116AS	93
30"	Over-the-Range with Convection	JMV9196CS	94
30"	Over-the-Range	JMV8208CS	94

## Warming Drawer

30"	Warming Drawer	JWD3030ES	
27"	JWD3027ES		100

## Ventilation

36"	Accolade® Downdraft Ventilation System	JXD7836BS	104
36"	Telescoping Downdraft Ventilation	JXD7036YS	
30"	JXD7030YS		104
4"	Modular Downdraft Vent	JVD0303G	104

## Ventilation (continued)

48"	Custom Hood Liner	UXL6048YSS	
36"	UXL6036YSS		106
36"	Custom Hood Liner	JXL6536CSS	106
30"	Custom Hood Liner	UXL5430BSS	106
36"	Perimetric Island-Mount Canopy Hood	JXI8936DS	107
36"	Perimetric Wall-Mount Canopy Hood	JXW8936DS	107
42"	Island-Mount Canopy Hood	JXI8742DS	
36"	JXI8736DS		108
36"	Wall-Mount Canopy Hood	JXW8736DS	108
36"	Island-Mount Canopy Hood	JXI8536DS	109
36"	Wall-Mount Canopy Hood	JXW8536DS	
30"	JXW8530DS		109
30"	Over-the-Range Microwave Oven with Convection	JMV9196CS	110
30"	Over-the-Range Microwave Oven	JMV8208CS	110

## Built-In Refrigerators

48"	Fully Integrated Side-by-Side Base Unit	JS48NFXDE	126
Euro-Style Stainless Panel Kit			
42"	JPK48SNXESS		127
42"	Fully Integrated Side-by-Side Base Unit	JS42NFXDE	126
Euro-Style Stainless Panel Kit			
42"	JPK42SNXESS		127
42"	Fully Integrated French Door Base Unit	JF42NFXDE	126
Euro-Style Stainless Panel Kit			
36"	JPK42FNXESS		127
36"	Fully Integrated French Door Base Unit	JF36NFXDE	126
Euro-Style Stainless Panel Kit			
36"	JPK36FNXESS		127
36"	Fully Integrated Bottom-Freezer Base Unit		
36"	Right-Hand Door Swing	JB36NFXRE	
36"	Left-Hand Door Swing	JB36NFXLE	127
Euro-Style Stainless Panel Kit			
48"	JPK36BNXESS		127
42"	Side-by-Side Refrigerator with Ice & Water Dispenser	JS48SSDUDE	
42"	JS42SSDUDE		129

## Freestanding Refrigerators

72"	Counter-Depth French Door with Ice & Water Dispenser	JFFC72EFS	136
72"	Counter-Depth French Door with Internal Water Dispenser	JFC2290REM	137
69"	JFC2089BEM		138
72"	Counter-Depth Side-by-Side with Ice & Water Dispenser	JSC23C9EEM	138
69"	Standard-Depth French Door with Ice & Water Dispenser	JFX2897DRM	139

## Under Counter Refrigeration

24"	Refrigerator/Freezer Drawers	JUD24FCERS	148
24"	Double-Refrigerator Drawers	JUD24FRERS	148
24"	Under Counter Glass Door Refrigerator		
24"	Right-Hand Door Swing	JUG24FRERS	
24"	Left-Hand Door Swing	JUG24FLERS	149
24"	Under Counter Refrigerator		
24"	Right-Hand Door Swing	JUR24FRERS	
24"	Left-Hand Door Swing	JUR24FLERS	149
24"	Wine Cellar		
24"	Right-Hand Door Swing	JUW24FRERS	
24"	Left-Hand Door Swing	JUW24FLERS	150
24"	Beverage Center		
24"	Right-Hand Door Swing	JUB24FRERS	
24"	Left-Hand Door Swing	JUB24FLERS	150
15"	Ice Machine	JIM158XYRS	151
15"	JIM159XYRS		151

## Dishwashers

24"	TriFecta™ Dishwasher	JDB9800CWS	160
24"	JDB9200CWS		160
24"	JDB9000CWS		161
24"	Flush TriFecta™ Dishwasher	JDB9600CWS	161

## Compactor

15"	Compactor	TC707S	166
-----	-----------	--------	-----



## PRO-STYLE® STAINLESS STEEL

Jenn-Air® Pro-Style® Stainless appliances combine robust design with features that deliver exceptional results. The striking, stainless steel finish lends itself to a variety of kitchen designs – from urban lofts to country estates.

Signature features of this line include diamond-etched stainless steel handles and oversized knobs. The distinctive badge and heavy-duty grates are bold details that help our kitchen appliances express commercial styling at its finest.



# PRO-STYLE® STAINLESS PRODUCTS

## Wall Ovens

30"	Double with V2™ Vertical Dual-Fan Convection System	JJW3830DP	26
30"	Double with MultiMode® Convection System	JJW2830DP	26
30"	Microwave/Wall Oven with V2™ Vertical Dual-Fan Convection System	JMW3430DP	28
30"	Microwave/Wall Oven with MultiMode® Convection System	JMW2430DP	29
30"	Single with V2™ Vertical Dual-Fan Convection System	JJW3430DP	30
30"	Single with MultiMode® Convection System	JJW2430DP	30

## Pro-Style® Rangetops

48"	Gas with Griddle	JGCP548WP	40
36"		JGCP536WP	
36"	Gas	JGCP436WP	41
30"		JGCP430WP	

## Cooktops

36"	Gas	JGC7636BP	55
30"		JGC7530BP	
36"	Gas	JGC3536GS	56
30"		JGC3530GS	

Pro-Style® Stainless Knob Kit W10678586 60

## Pro-Style® Ranges

48"	Dual-Fuel with Griddle and Dual-Fan MultiMode® True Convection System	JDRP548WP	68
36"		JDRP536WP	
36"	Dual-Fuel with Dual-Fan MultiMode® True Convection System	JDRP436WP	69
30"		JDRP430WP	
48"	Gas with Griddle and Dual-Fan MultiMode® True Convection System	JGRP548WP	70
36"		JGRP536WP	
36"	Gas with Dual-Fan MultiMode® True Convection System	JGRP436WP	71
30"		JGRP430WP	
48"	LP with Griddle and Dual-Fan MultiMode® True Convection System	JLRP548WP	72
36"		JLRP536WP	
36"	LP with Dual-Fan MultiMode® True Convection System	JLRP436WP	73
30"		JLRP430WP	

## Downdraft Range

30" Dual-Fuel JDS1750FP 80

## Ranges

30"	Dual-Fuel	JDS1450FP	86
30"	Gas	JGS1450FP	86
30"	Induction	JIS1450DP	87

## Microwave Oven

30"	Built-In with Speed-Cook	JMC2430DP	92
-----	--------------------------	-----------	----

## Warming Drawer

30"	Warming Drawer	JWD3030EP	100
-----	----------------	-----------	-----

## Ventilation

36"	Accolade® Downdraft Ventilation System	JXD7836BS	104
48"		JXW9048WP	
36"	Wall-Mount Hood	JXW9036WP	105
30"		JXW9030WP	
36"	Low Profile Under-Cabinet Hood	JXU9136WP	105
30"		JXU9130WP	
48"	Custom Hood Liner	UXL6048YSS	106
36"		UXL6036YSS	
36"	Custom Hood Liner	JXL6536CSS	106
30"		UXL5430BSS	106

## Built-In Refrigerators

48"	Fully Integrated Side-by-Side Base Unit	JS48NFXDE	126
	Pro-Style® Stainless Panel Kit	JPK48SNXEPS	127
42"	Fully Integrated Side-by-Side Base Unit	JS42NFXDE	126
	Pro-Style® Stainless Panel Kit	JPK42SNXEPS	127
42"	Fully Integrated French Door Base Unit	JF42NFXDE	126
	Pro-Style® Stainless Panel Kit	JPK42FNXEPS	127
36"	Fully Integrated French Door Base Unit	JF36NFXDE	126
	Pro-Style® Stainless Panel Kit	JPK36FNXEPS	127
36"	Fully Integrated Bottom-Freezer Base Unit	JB36NFXRE	127
	Right-Hand Door Swing	JB36NFXLE	
	Left-Hand Door Swing		127
	Pro-Style® Stainless Panel Kit	JPK36BNXEPS	127
48"	Side-by-Side Refrigerator with Ice & Water Dispenser	JS48PPDUDE	128
42"		JS42PPDUDE	

## Freestanding Refrigerators

72"	Counter-Depth French Door with Ice & Water Dispenser	JFFCC72EFP	136
72"	Counter-Depth French Door with Internal Water Dispenser	JFC2290REP	137
69"		JFC2089BEP	138
72"	Counter-Depth Side-by-Side with Ice & Water Dispenser	JSC23C9EEM	138
	Pro-Style® Stainless Handle Kit	W10214147A	140
69"	Standard-Depth French Door with Ice & Water Dispenser	JFX2897DRP	139

## Under Counter Refrigeration

24"	Refrigerator/Freezer Drawers	JUD24FCERS	148
	Pro-Style® Stainless Handle Kit	W10588599	152
24"	Double-Refrigerator Drawers	JUD24FRERS	148
	Pro-Style® Stainless Handle Kit	W10588599	152
24"	Under Counter Glass Door Refrigerator		
	Right-Hand Door Swing	JUG24FRERS	149
	Left-Hand Door Swing	JUG24FLERS	149
	Pro-Style® Stainless Handle Kit	W10588599	152
24"	Under Counter Refrigerator		
	Right-Hand Door Swing	JUR24FRERS	149
	Left-Hand Door Swing	JUR24FLERS	149
	Pro-Style® Stainless Handle Kit	W10588599	152



## Under Counter Refrigeration (continued)

24"	Wine Cellar Right-Hand Door Swing	JUW24FRERS	150
	Left-Hand Door Swing	JUW24FLERS	
	Pro-Style® Stainless Handle Kit	W10588599	152
24"	Beverage Center Right-Hand Door Swing	JUB24FRERS	150
	Left-Hand Door Swing	JUB24FLERS	
	Pro-Style® Stainless Handle Kit	W10588599	152
15"	Ice Machine	JIM158XYRS	151
		JIM159XYRS	151
	Pro-Style® Stainless Handle Kit	W10591217	152

## Dishwashers

24"	TriFecta™ Dishwasher	JDB9800CWP	160
		JDB9200CWP	160
		JDB9000CWP	161
24"	Flush TriFecta™ Dishwasher	JDB9600CWP	161

## Compactor

15"	Base Unit	TC707S	166
	Pro-Style® Stainless Panel Kit	W10197421	166



## CUSTOM OVERLAY

For a truly personalized kitchen, choose appliances with a Custom Overlay design, which allows the look of our appliances to be tailored to any style and creates a seamless appearance. Custom panels and handles help homeowners showcase their imagination and creativity in ways that match their culinary passion and blend with surrounding cabinetry. Their new kitchen will integrate their distinctive style with the exceptional performance they expect from Jenn-Air® appliances.





## CUSTOM OVERLAY PRODUCTS

### Warming Drawer

30"	Base Unit	JWD3030EX	100
27"		JWD3027EX	

### Ventilation

48"	Custom Hood Liner	UXL6048YSS	106
36"		UXL6036YSS	
36"	Custom Hood Liner	JXL6536CSS	106
30"		UXL5430BSS	106

### Built-In Refrigerators

48"	Fully Integrated	JS48NFXDE	
42"	Side-by-Side Base Unit	JS42NFXDE	126
42"	Fully Integrated	JF42NFXDE	
36"	French Door Base Unit	JF36NFXDE	126
36"	Fully Integrated		
	Bottom-Freezer Base Unit		
	Right-Hand Door Swing	JB36NFXRE	
	Left-Hand Door Swing	JB36NFXLE	127

### Freestanding Refrigerator

72"	Counter-Depth French Door with Internal Water Dispenser	JFC2290RTB	137
-----	---	------------	-----

### Under Counter Refrigeration

24"	Refrigerator/Freezer Drawers	JUD24FCECX	148
24"	Double-Refrigerator Drawers	JUD24FRECX	148

### Under Counter Refrigeration (continued)

24"	Under Counter Glass Door Refrigerator		
	Right-Hand Door Swing	JUG24FRECX	149
	Left-Hand Door Swing	JUG24FLECX	149
24"	Under Counter Solid Door Refrigerator		
	Right-Hand Door Swing	JUR24FRECX	149
	Left-Hand Door Swing	JUR24FLECX	149
24"	Wine Cellar		
	Right-Hand Door Swing	JUW24FRECX	150
	Left-Hand Door Swing	JUW24FLECX	150
24"	Beverage Center		
	Right-Hand Door Swing	JUB24FRECX	150
	Left-Hand Door Swing	JUB24FLECX	150
15"	Ice Machine	JIM158XYCX	151
		JIM159XYCX	151

### Dishwashers

24"	TriFecta™ Dishwasher	JDB9800CWX	160
		JDB9200CWX	160
24"	Flush TriFecta™ Dishwasher	JDB9600CWX	161

### Compactor

15"	Base Unit	TC607X	166
-----	-----------	--------	-----



## ✓ FLOWING GLASS

Jenn-Air® appliances featured in the Floating Glass series bring pristine surfaces and elegant electronic controls together for a flawless look that will satisfy the most discriminating tastes.

The signature elements include high-gloss glass panels, which accent surrounding cabinetry and provide a clean, contemporary alternative to stainless steel. Other design highlights include a subtle badge with embossed metallic lettering and slightly curved, color-coordinated handles.



## ✓ FLOATING GLASS PRODUCTS

### Wall Ovens

30"	Double with V2™ Vertical Dual-Fan Convection System	JJW3830DB	26
30"	Double with MultiMode® Convection System	JJW2830DB	26
27"	Microwave/Wall Oven with V2™ Vertical Dual-Fan Convection System	JJW2827DB	26
30"	Microwave/Wall Oven with MultiMode® Convection System	JMW3430DB	28
30"	Single with V2™ Vertical Dual-Fan Convection System	JMW2430DB	29
27"	Single with MultiMode® Convection System	JMW2427DB	29
30"	Single with V2™ Vertical Dual-Fan Convection System	JJW3430DB	30
30"	Single with MultiMode® Convection System	JJW2430DB	30
27"	Single with MultiMode® Convection System	JJW2427DB	30

### Downdraft Cooktops

36"	JX3™ Gas Downdraft	JGD3536GB	46
30"	JX3™ Electric Radiant Downdraft with Glass-Touch Electronic Controls	JED4536GB	47
36"	JX3™ Electric Radiant Downdraft	JED3536GB	47
30"	JX3™ Electric Radiant Downdraft	JED3430GB	47

### Cooktops

36"	Glass 5-Burner Gas	JGC2536EB	54
30"	Induction	JIC4536XB	58
36"	Electric Radiant with Glass-Touch Electronic Controls	JEC4536BB	59
30"	Electric Radiant with Glass-Touch Electronic Controls	JEC4430BB	59
36"	Electric Radiant	JEC3536BB	59
30"	Electric Radiant	JEC3430BB	59

### Downdraft Ranges

30"	Dual-Fuel	JDS1750FB	80
30"	Electric Radiant	JES1750FB	80

### Ranges

30"	Gas	JGS1450FB	86
30"	Electric Radiant	JES1450FB	87

### Microwave Ovens

30"	Built-In with Speed-Cook	JMC2430DB	92
22"	Built-In/Countertop	JMC1116AB	93
30"	Over-the-Range with Convection	JMV9196CB	94
30"	Over-the-Range	JMV8208CB	94

### Ventilation

48"	Custom Hood Liner	UXL6048YSS	106
36"	Custom Hood Liner	UXL6036YSS	106
36"	Custom Hood Liner	JXL6536CSS	106
30"	Custom Hood Liner	UXL5430BSS	106
30"	Over-the-Range Microwave Oven with Convection	JMV9196CB	110
30"	Over-the-Range Microwave Oven	JMV8208CB	110

### Freestanding Refrigerator

72"	Counter-Depth French Door with Internal Water Dispenser	JFC2290REY	137
-----	---	------------	-----

### Dishwashers

24"	TriFecta™ Dishwasher	JDB9200CWY	160
		JDB9000CWB	161



## BUILT-IN COFFEE SYSTEM

### THE PERFECT BREW

The Jenn-Air™ built-in coffee system gives consumers an option for enriching their lifestyle or to enhance entertaining. At just 24 inches wide, the coffee system easily fits most kitchens as well as other areas such as a den, home office or dining room. And because it plugs into a standard 120-volt outlet and doesn't need to be attached to a water line, it's easy to install.



The built-in coffee maker creates the **precise temperature and pressure conditions** that are required to brew espresso as well as espresso-based cappuccinos and lattes. Two of the signature features that let you know you are getting a properly brewed espresso will be the way the espresso **dispenses in tails** and the layer of crema that appears on top of the finished espresso.

To switch from espresso to a cappuccino or latte, simply replace the hot water spout with the **integrated milk container**. And the versatility of the coffee system is displayed by its ability to dispense hot water for beverages such as tea.



The **professional-grade whole-bean grinder** is designed to handle the regular task of grinding coffee beans and features 13 integrated levels, calibrated for fine to coarse. Easy access to the internal components makes the entire system easy to clean.



## 24" Built-In Coffee System

**JBC7624B** – 24"

### Style Option:



- Ideal 11.7 BARs of consistent brewing pressure
- Integrated 13-level whole-bean coffee grinder
- Dual dispensing spouts for one- or two-cup brewing
- Ease of use and cleaning
- Customizable size, strength and temperature settings
- Frothing system with integrated milk container for brewing cafe-style beverages

Overall Product Dimensions  
23<sup>3/8</sup>" w x 18" h x 15<sup>15/16</sup>" d



### Install Anywhere

With an easy-to-fill, 1-liter water reservoir, the built-in coffee system can be installed anywhere in your home without requiring special plumbing.



### Customizable Size, Strength and Temperature

Coffee connoisseurs will enjoy beverages brewed to their exact tastes and preferences with settings to customize the size and strength with three temperature options.

## Built-In Coffee System

24"	
<b>JBC7624B</b>	
Overall Product Dimensions – w x h x d (in)	23 <sup>3/8</sup> x 18 x 15 <sup>15/16</sup>
Opening/Clearance Dimensions – w x h x d (in)	22 x 18 x 21 <sup>7/16</sup>
Approximate Shipping Weight (lb)	29
Volts/Amps Required	120/15
<b>COFFEE SYSTEM FEATURES</b>	
Espresso Brewing Options	1, 2
Cappuccino Option	■
Hot Water Dispenser	■
Dual Boiler	■
Brewing Pressure	11.7 BARs
Frothing System with Integrated Milk Container	■
Conical Whole-Bean Coffee Grinder with Metal Construction	13 Levels (Fine to Coarse)
Dispensing Spouts	2
Ground Coffee Compatibility	■
LED Lighting	■
Easy-Access Component Bay	■
Removable Brewing Unit	■
Serving Size	5 Programmed Sizes Plus Customization
Temperature	3 Settings
Coffee Strength	6 Programmed Tastes Plus Customization
Automatic Brewed Grounds Collection	■
Water Reservoir Capacity	1 Liter
Cup Tray with Integrated Drip Tray	2 Cup Float Indicator/5 Cup Capacity
Concealed Storage Trays	■
Coffee Measuring Scoop	■
<b>CONTROL FEATURES</b>	
Touch-Activated Control Panel	■
Multi-Lingual LCD Display	■
Pre-Heat Rinse Function	■
Water Hardness Setting	■
Auto-Start Mode	■
Auto-Off Mode	■
Descaling Mode	■
One-Button Steam Cleaning for Frothing System	■
"Fill Tank" Alert	■
"Fill Beans Container" Alert	■
"Empty Grounds Container" Alert	■
Statistics Function	■
<b>EXTERIOR DESIGN FEATURES</b>	
Flush-to-Cabinet Installation Option	■
No Special Plumbing Required	■
Style Option (add letter to end of model number)	
Euro-Style Stainless	S

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to installation instructions packaged with product *before* selecting cabinetry, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.


## WALL OVENS

### ROBUST POWER, BEAUTIFUL FORM

Jenn-Air® wall ovens are touchstones of innovation, performance and timeless style that will become one of the crown jewels of your kitchen. Our heritage of thoughtful design continues in the incomparable performance and attention to detail found in flush-to-cabinet Jenn-Air® wall ovens, available in 30- and 27-inch widths and single, double or combination configurations.



Our wall ovens deliver subtle sophistication to kitchens. Their flush-to-cabinet design complements other Jenn-Air® appliances as part of an entertainment suite. Versatile single wall oven configurations can install below a countertop, or in a wall below a built-in microwave oven.

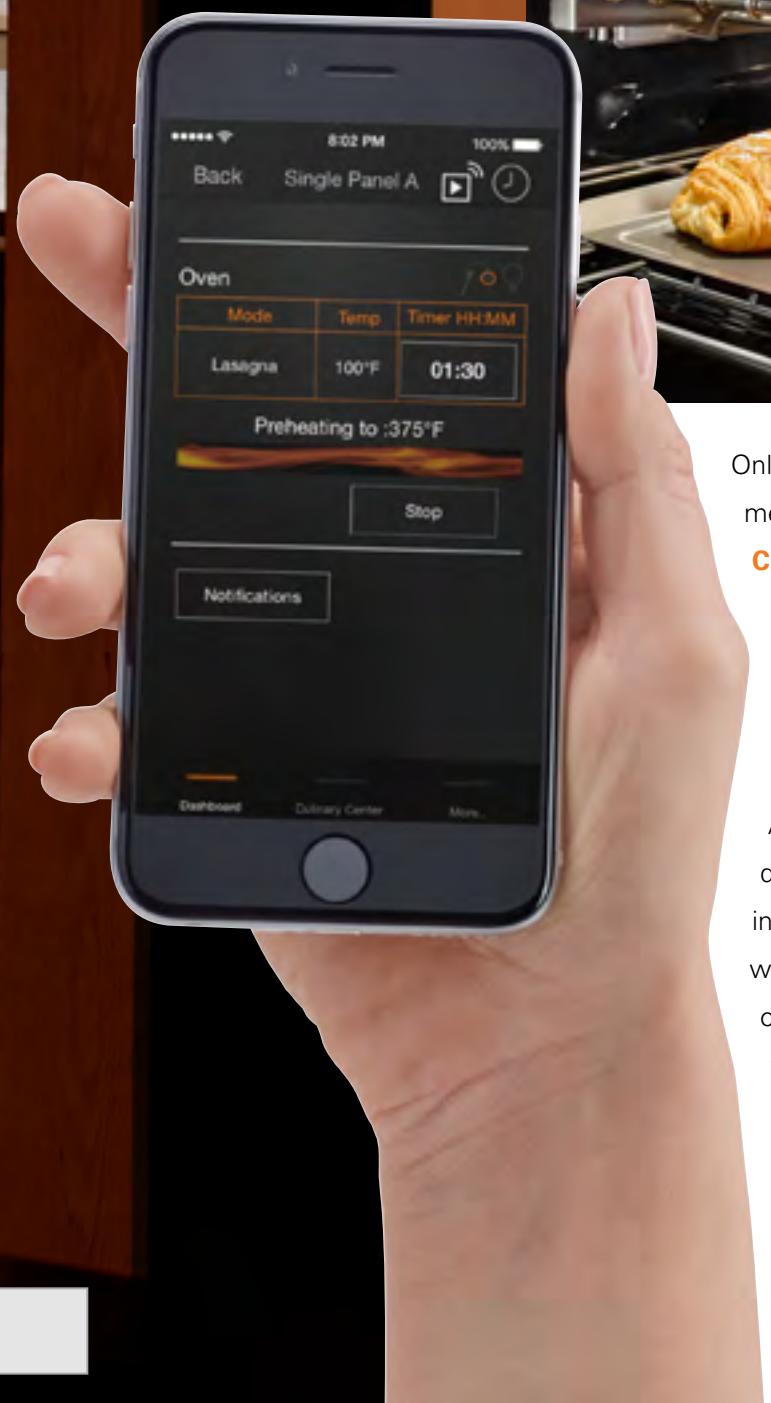

Only Jenn-Air® wall ovens allow the creation of incredible meals tailored to individual expectations with the **Jenn-Air® Culinary Center**, utilizing full-color imagery to guide cooks to an effortless, sumptuous result. And, users will enjoy how the **V2™ vertical dual-fan convection system** provides even heat distribution throughout the oven for superior results on every rack.

As an added benefit, wall ovens with our V2™ vertical dual-fan convection system offer **WiFi connectivity** that integrates the oven with existing devices in meaningful ways such as **Works with Nest** and **Amazon Alexa**. And our mobile app puts control of the wall oven, including the Culinary Center, at your fingertips.



### 30" Double Wall Oven with V2™ Vertical Dual-Fan Convection System

**JJW3830D – 30"**

#### Style Options:



- V2™ vertical dual-fan convection system
- 7-inch full color touch-anywhere LCD display
- Jenn-Air® Culinary Center
- My Creations (store recipes with custom names)
- DuraFinish® Protection (on stainless steel convection tower)
- Soft, auto-close door
- WiFi connectivity\*
- Flush-to-cabinet design (requires trim kit, not included)



Overall Product Dimensions  
30" w x 52<sup>3</sup>/<sub>8</sub>" h x 25<sup>5</sup>/<sub>16</sub>" d



### 30"/27" Double Wall Oven with Upper MultiMode® Convection System

**JJW2730D – 30"**

**JJW2727D – 27"**

#### Style Option:



- MultiMode® convection system (upper oven)
- 4.3-inch full color menu-driven LCD display
- My Creations (store recipes with preset names)
- Telescoping glide rack (upper oven)
- Rapid preheat (upper oven)
- Flush-to-cabinet design (requires trim kit, not included)

Overall Product Dimensions  
30-inch – 30" w x 52<sup>3</sup>/<sub>8</sub>" h x 25<sup>5</sup>/<sub>16</sub>" d  
27-inch – 27" w x 52<sup>3</sup>/<sub>8</sub>" h x 25<sup>5</sup>/<sub>16</sub>" d



### 30"/27" Double Wall Oven with MultiMode® Convection System

**JJW2830D – 30"**

#### Style Options:




**JJW2827D – 27"**

#### Style Options:



- MultiMode® convection system
- 4.3-inch full color menu-driven LCD display
- My Creations (store recipes with preset names)
- Telescoping glide rack
- Rapid preheat
- Flush-to-cabinet design (requires trim kit, not included)

Overall Product Dimensions  
30-inch – 30" w x 52<sup>3</sup>/<sub>8</sub>" h x 25<sup>5</sup>/<sub>16</sub>" d  
27-inch – 27" w x 52<sup>3</sup>/<sub>8</sub>" h x 25<sup>5</sup>/<sub>16</sub>" d

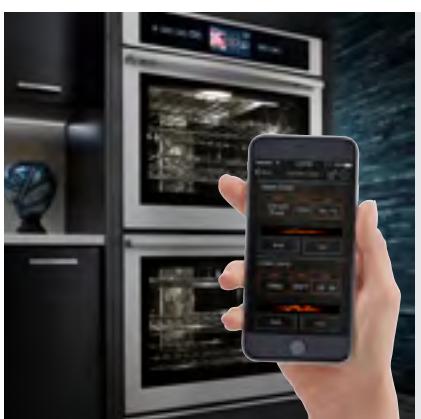

### Control that is Always at Hand

Connecting to your wireless local area network, select wall ovens offer unprecedented connectivity through a fully functional app for iOS and Android devices. Easily check the status of oven cycles, receive notifications when preheat and cooking cycles are complete, control oven settings and use the next-generation Jenn-Air® Culinary Center, all with just a simple touch of your mobile device.\*

\* App features and functionality subject to change. Subject to terms of use and privacy policy at [jennair.com/connect](http://jennair.com/connect). Data rates may apply. The iPhone is a trademark of Apple Inc.

\* Works With Nest.



### My Creations

Featured on Jenn-Air® wall ovens, My Creations allows you to seamlessly combine up to three cooking modes and save the settings for your favorite recipes.




### 30" Microwave/Wall Oven with V2™ Vertical Dual-Fan Convection System

**JMW3430D** – 30"

#### Style Options:



- V2™ vertical dual-fan convection system
- 7-inch full color touch-anywhere LCD display
- Jenn-Air® Culinary Center
- My Creations (store recipes with preset names)
- DuraFinish® Protection (on stainless steel convection tower)
- Soft, auto-close door
- WiFi connectivity\*
- Speed-Cook
- Flush-to-cabinet design (requires trim kit, not included)



Overall Product Dimensions  
30" w x 43<sup>3</sup>/<sub>4</sub> h x 25<sup>5</sup>/<sub>16</sub> d



### 30"/27" Microwave/Wall Oven with MultiMode® Convection System

**JMW2430D** – 30"

#### Style Options:



**JMW2427D** – 27"

#### Style Options:



Overall Product Dimensions  
30-inch – 30" w x 43<sup>3</sup>/<sub>4</sub> h x 25<sup>5</sup>/<sub>16</sub> d  
27-inch – 27" w x 43<sup>3</sup>/<sub>4</sub> h x 25<sup>5</sup>/<sub>16</sub> d

- MultiMode® convection system
- 4.3-inch full color menu-driven LCD display
- Auto Convection Conversion
- My Creations (store recipes with preset names)
- Convection and microwave combination cooking
- Speed-Cook
- Flush-to-cabinet design (requires trim kit, not included)



#### Complement Your Wall Oven with a Warming Drawer

Adding a warming drawer to your kitchen will help you create a comprehensive cooking center. Keep completed dishes warm and at the ideal texture until you're ready to serve, or use its specialized slow roasting and bread proofing functions for even more flexibility. Match your warming drawer to any of our signature kitchen suite designs with a coordinating panel kit. See pages 98-101 for more details.

\* Works With Nest.



#### Seamless Elegance and Minimalist Style with Flush Installation

Leaving only a 1/8" gap on all edges, our wall ovens can be installed flush with walls or cabinetry, offering you a seamless, integrated design that is perfectly at home in both contemporary and traditional kitchens, as well as every kitchen design in-between.



Overall Product Dimensions  
30" w x 297/8" h x 255/16" d


### 30" Single Wall Oven with V2™ Vertical Dual-Fan Convection System

**JJW3430D – 30"**

#### Style Options:



- V2™ vertical dual-fan convection system
- 7-inch full color touch-anywhere LCD display
- Jenn-Air® Culinary Center
- My Creations (store recipes with preset names)
- DuraFinish® Protection (on stainless steel convection tower)
- Soft, auto-close door
- WiFi connectivity\*
- Flush-to-cabinet design (requires trim kit, not included)



Overall Product Dimensions  
30-inch – 30" w x 297/8" h x 255/16" d  
27-inch – 27" w x 297/8" h x 255/16" d

### 30"/27" Single Wall Oven with MultiMode® Convection System

**JJW2430D – 30"**

#### Style Options:



**JJW2427D – 27"**

#### Style Options:



- MultiMode® convection system
- 4.3-inch full color menu-driven LCD display
- Auto Convection Conversion
- My Creations (store recipes with preset names)
- Flush-to-cabinet design (requires trim kit, not included)



#### Performance Highlighted by DuraFinish® Protection

Recognizable the instant the oven door is opened, the stainless steel convection tower is coated with DuraFinish® Protection. This specialized finish brilliantly highlights the exceptional performance of our wall ovens with the V2™ vertical dual-fan convection system, helping protect the convection tower from staining, scratching and discoloration from high-temperature cooking. Spills or baked-on foods wipe off easily with a damp cloth, making cleaning virtually effortless.

\* Works With Nest.

## Double Wall Ovens

MODEL #	JJW3830D	JJW2830D	JJW2730D	JJW2827D	JJW2727D
Overall Product Dimensions – w x h x d (in) <sup>A</sup>	30 x 523/8 x 255/16	30 x 523/8 x 255/16	30 x 523/8 x 255/16	27 x 523/8 x 255/16	27 x 523/8 x 255/16
Opening/Clearance Dimensions – w x h x d (in)	281/2 x 501/4 x 24 min.	281/2 x 501/4 x 24 min.	281/2 x 501/4 x 24 min.	251/2 x 501/4 x 24 min.	251/2 x 501/4 x 24 min.
Opening/Clearance Dimensions for Flush Installation – w x h x d (in)	301/4 x 533/16 x 25 min.	301/4 x 533/16 x 25 min.	301/4 x 533/16 x 25 min.	271/4 x 533/16 x 25 min.	271/4 x 533/16 x 25 min.
Approximate Shipping Weight (lb)	341	331	331	315	315
Volts/Amps Required	240/40	240/40	240/40	240/40	240/40
<b>OVEN FEATURES</b>					
Oven Capacity (each oven, cu. ft.)	5.0	5.0	5.0	4.3	4.3
Element Wattages (Bake/Broil/Convection)	2,800/4,000/3,400 (2)	2,800/4,000/3,200	2,800/4,000/3,200	2,800/4,000/3,200	2,800/4,000/3,200
V2™ Vertical Dual-Fan Convection System	■	—	—	—	—
MultiMode® Convection System	—	■	U	■	U
Stainless Steel Dual-Fan Convection Tower with DuraFinish® Protection	■	—	—	—	—
Dual-Speed Reverse Air Flow Fan	■	—	—	—	—
Hidden Bake Element	■	■	■	■	■
8-Pass Reflective Broil Element	■	■	■	■	■
Convection Element(s)	2 U, 2 L	■	U	■	U
Variable Temperature Closed-Door Broiling	■	■	■	■	■
Telescoping Glide Rack	1 U, 1 L	1 U, 1 L	1 U, 1 L	1 U	1 U
Heavy-Duty Racks with Handle	■	■	■	■	■
Offset Rack	■	U	U	U	U
Halogen Theater Lighting (each oven)	2	2	2	2	2
Chef's Light	■	—	—	—	—
Jet Black Cavity	■	■	■	■	■
Soft, Auto-Close Door	■	—	—	—	—
<b>CONTROL FEATURES</b>					
7-Inch Full Color Touch-Anywhere LCD Display	■	—	—	—	—
Glass-Touch Electronic Controls	■	■	■	■	■
WiFi Connectivity <sup>B</sup>	■	—	—	—	—
Jenn-Air® Culinary Center	■	—	—	—	—
4.3-Inch Full Color Menu-Driven LCD Display	—	■	■	■	■
No Preheat Baking	■	—	—	—	—
My Creations	■	■	■	■	■
Auto Convection Conversion	U/L	U/L	U	U/L	U
Rapid Preheat	U/L	U/L	U	U/L	U
Delay-Start Cooking & Cleaning	U/L	U/L	U/L	U/L	U/L
Cook & Hold Option	U/L	U/L	U/L	U/L	U/L
Proofing Option	U/L	U/L	U	U/L	U
Keep Warm™ Option	■	■	■	■	■
Temperature Probe	■	■	U	■	U
Control Lock	■	■	■	■	■
Sabbath Mode	■	■	■	■	■
Demo Mode	■	■	■	■	■
<b>OPTIONAL ACCESSORY</b>					
Roll-Out Full Extension Rack with Handle	W10860776	W10860776	W10860776	W10445854A	W10445854A
Premium Broil Pan & Roasting Rack	W10123240	W10123240	W10123240	W10123240	W10123240
Stainless Steel Flush Install Trim Kit	W10837579	W10791229	W10791229	W10791228	W10791228
Black Flush Install Trim Kit	W10837578	W10791233	—	W10791232	—
<b>EXTERIOR DESIGN FEATURES</b>					
Seamless Flat-Front Design	■	■	■	■	■
Flush-to-Cabinet Design	■	■	■	■	■
Style Options (add letter to end of model number)					
Pro-Style® Stainless <sup>C</sup>	P	P	—	—	—
Euro-Style Stainless <sup>D</sup>	S	S	S	S	S
Black Floating Glass <sup>E</sup>	B	B	—	B	—

U = Upper Oven, L = Lower Oven.

A. Depth includes handles.

B. Works With Nest.

C. Includes stainless steel handles with diamond etching.

D. Includes slightly curved, stainless steel handles.

E. Includes slightly curved, color-coordinating handles.



## ✓ STEAM AND CONVECTION WALL OVEN EXTRAORDINARY RESULTS

The 24-inch, Jenn-Air® Steam and Convection wall oven is a stylish choice that fits the desire to have appliances that elevate the entire kitchen experience. 27- and 30-inch trim kits ship with the oven, making it easy to pair with a wall oven and the flush-to-cabinet design allows an integrated look with surrounding cabinets and appliances.



Steam, convection heat, or a combination of the two let you cook almost every type of food imaginable. To make this oven even easier to use, the **oven ships with a temperature probe and three racks** that are ideal for specific cooking tasks.



As more attention is paid to where our food comes from, this oven focuses on the way food is prepared. **Steam cooking** enhances the nutrient retention in foods like vegetables and seafood, preserves the tenderness of meats and poultry and takes the place of the work-arounds needed when baking restaurant-style breads and pastries. A **1,200-watt convection element** can either be used independently or with the steam capability to help ensure even, golden-brown results without the flavors of one food transferring to another.

With nine cooking modes there are dozens of ways to create a meal of distinction. A **Preset Foods mode offers 68 different pre-programmed cycles** that eliminate guesswork by automatically adjusting the oven's cooking settings based on the selection.



## 24" Steam and Convection Wall Oven

**JBS7524B – 24"**

### Style Option:



- Steam mode
- Steam Plus Convection mode
- Convection Bake mode
- 68 Preset Foods mode
- 4.8-inch LCD display with glass-touch controls
- Stainless steel interior

Overall Product Dimensions  
23<sup>1</sup>/<sub>2</sub>" w x 18" h x 22<sup>1</sup>/<sub>4</sub>" d



### A Versatile Companion to a Full-Size Oven

A Proofing function adds versatility to the steam and convection oven. When this function is selected, the oven temperature will operate at 105°F, allowing dough to rise significantly faster compared to proofing at room temperature. Proofing time can be set for up to 90 minutes.



### Water Reservoir

With this removable reservoir, supplying your oven's steam generator with water couldn't be easier. Rather than plumbing the oven, simply fill the reservoir with tap water, place it back into its compartment, and close the oven door.



### Getting Started with Steam

Cooking with steam is a technology that will be new to most consumers. Our eBook, ENTERTAIN: Cooking with Steam and Convection! is an ideal resource for discovering the potential of this amazing appliance. You can download a free copy at the iBookstore.



## Steam and Convection Wall Oven

<b>24"</b>		<b>JBS7524B</b>
Overall Product Dimensions – w x h x d (in) <sup>A</sup>		23 <sup>1</sup> / <sub>2</sub> x 18 x 22 <sup>1</sup> / <sub>4</sub>
Opening/Clearance Dimensions – w x h x d (in)		21 <sup>7</sup> / <sub>8</sub> x 17 <sup>3</sup> / <sub>4</sub> x 21 <sup>3</sup> / <sub>4</sub>
Approximate Shipping Weight (lb)		116
Volts/Amps Required		120/15
<b>OVEN FEATURES</b>		
Oven Capacity (cu. ft.)		1.3
Convection Element Wattage		1,200
Roasting Rack		■
Baking/Drip Tray		■
Steam Tray		■
1.6 Quart Water Reservoir		■
Halogen Oven Light		■
Stainless Steel Interior		■
<b>CONTROL FEATURES</b>		
4.8-Inch LCD Display with Glass-Touch Controls		■
No-Preheat Option		■
Recently-Used Option		■
Temperature Probe		■
Control Lock		■
<b>COOKING MODES</b>		
68 Preset Foods		■
Manual:		
Steam		■
Convection Bake		■
Steam Plus Convection		■
Steam Reheat		■
<b>SPECIALTY COOKING &amp; FOOD PREPARATION MODES</b>		
Proofing		■
Steam Defrost		■
Sous Vide Reheat		■
Yogurt		■
<b>MAINTENANCE MODES</b>		
Oven Calibration		■
Descaling		■
Drain		■
Steam Cleaning		■
<b>EXTERIOR DESIGN FEATURES</b>		
Flush-to-Cabinet Design		■
30" and 27" Trim Kits (Included)		■
Style Option (add letter to end of model number)		
Euro-Style Stainless <sup>B</sup>		S

A. Depth includes handle.

B. Includes slightly curved, stainless steel handle.

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to installation instructions packaged with product *before* selecting cabinetry, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

## ✓ PRO-STYLE® RANGETOPS THE PEAK OF PERFORMANCE

Jenn-Air® Pro-Style® rangetops are designed to meet the needs of those who want restaurant-style performance and aesthetics in their appliances. Four- or six-burner rangetops are available in 48-, 36- and 30-inch widths. Each range top is convertible to LP gas, with the included kit, allowing homeowners to use the fuel type that suits their needs.



The layout of a Pro-Style® rangetop is designed to allow the freedom to cook with both the proper power level and burner size for superior results. Among the rangetop's four or six burners are one or two **20,000 BTU dual-stacked PowerBurners**, which feature the versatility of two burners in one location with both high- and low-heat capabilities.



When paired with a **5,000 BTU simmer burner**, cooks have dedicated access to precise lows for delicate tasks like melting chocolate or simmering fragrant soups. For even more versatility, choose a configuration with a **high-performance chrome electric griddle**, which is ideal for quickly searing steak or seafood while radiating less heat into the kitchen. The chrome-infused surface doesn't require seasoning and retains its attractive, smooth surface even after heavy use.



The footprint of a Jenn-Air® Pro-Style® rangetop expands design options, allowing installation in an island. The rangetop's robust stainless steel construction provides an elegant, gourmet aesthetic to any kitchen. And, **cast iron grates** form a continuous surface above the sealed burners, making sliding pans across the surface effortless. Complement a Pro-Style® rangetop with other Pro-Style® appliances, like a wall oven, to create a commercial-style kitchen suite.



## 48" Pro-Style® Rangetop with Griddle

**JGCP548WP – 48"**

- Two 20,000 BTU dual-stacked PowerBurners
- Electric griddle (1,320 watts)
- Three 15,000 BTU burners
- 5,000 BTU simmer burner (reduces to ultra-low 700 BTUs)
- Electronic ignition and Flame-Sensing™ re-ignition

Overall Product Dimensions  
47<sup>7</sup>/<sub>8</sub>" w x 28<sup>3</sup>/<sub>8</sub>" d



## 36" Pro-Style® Rangetop

**JGCP436WP – 36"**

- Two 20,000 BTU dual-stacked PowerBurners
- Three 15,000 BTU burners
- 5,000 BTU simmer burner (reduces to ultra-low 700 BTUs)
- Electronic ignition and Flame-Sensing™ re-ignition

Overall Product Dimensions  
35<sup>3</sup>/<sub>4</sub>" w x 28<sup>3</sup>/<sub>8</sub>" d



## 36" Pro-Style® Rangetop with Griddle

**JGCP536WP – 36"**

- 20,000 BTU dual-stacked PowerBurner
- Electric griddle (1,320 watts)
- Two 15,000 BTU burners
- 5,000 BTU simmer burner (reduces to ultra-low 700 BTUs)
- Electronic ignition and Flame-Sensing™ re-ignition

Overall Product Dimensions  
35<sup>3</sup>/<sub>4</sub>" w x 28<sup>3</sup>/<sub>8</sub>" d



## 30" Pro-Style® Rangetop

**JGCP430WP – 30"**

- 20,000 BTU dual-stacked PowerBurner
- Two 15,000 BTU burners
- 5,000 BTU simmer burner (reduces to ultra-low 700 BTUs)
- Electronic ignition and Flame-Sensing™ re-ignition

Overall Product Dimensions  
29<sup>3</sup>/<sub>4</sub>" w x 28<sup>3</sup>/<sub>8</sub>" d



## 5,000 BTU Simmer Burner

The simmer burner provides even, low-output heat that prevents scorching and can be reduced to as low as 500 BTUs for delicate tasks such as melting chocolate.



## Accessories that Add to Commercial Styling

Stainless steel backsplashes are available to enhance the commercial styling of Pro-Style® rangetops and protect the wall behind them. One option features two shelves which can be used for plate warming or to keep ingredients close at hand. See page 42 for more details.



## Pro-Style® Rangetops



## 9" Stainless Steel Backsplash

**W10115777** – 48"**W10115776** – 36"**W10115773** – 30"

- Protects the wall behind the rangetop



## Stainless Steel Backsplash with Two Shelves

**W10285449** – 48"**W10285448** – 36"**W10285447** – 30"

- Protects the wall behind the rangetop
- Shelves can be used for ingredient placement or plate staging/warming



## Stainless Steel Griddle Cover

**W10160195**

- For use with Pro-Style® rangetops JGCP548WP and JGCP536WP to cover the griddle when not in use



## Wok Ring

**W10216179**

- Fits securely on top of the grates to facilitate wok cooking
- Not for use with Wok AO142

	48"	36"		30"
MODEL #	JGCP548W	JGCP536W	JGCP436W	JGCP430W
Overall Product Dimensions – w x d (in) <sup>A</sup>	47 <sup>7/8</sup> x 28 <sup>3/8</sup>	35 <sup>3/4</sup> x 28 <sup>3/8</sup>	35 <sup>3/4</sup> x 28 <sup>3/8</sup>	29 <sup>3/4</sup> x 28 <sup>3/8</sup>
Opening/Clearance Dimensions – w x d (in)	47 <sup>3/8</sup> x 22 <sup>1/4</sup>	35 <sup>1/4</sup> x 22 <sup>1/4</sup>	35 <sup>1/4</sup> x 22 <sup>1/4</sup>	29 <sup>1/4</sup> x 22 <sup>1/4</sup>
Approximate Shipping Weight (lb)	180	150	135	110
Volts/Amps Required	120/15	120/15	120/15	120/15
<b>COOKING SURFACE FEATURES</b>				
Sealed Burners	6	4	6	4
Natural Gas BTUs: High/Low				
Left Front	20,000/1,300	20,000/1,300	20,000/1,300	20,000/1,300
Left Rear	15,000/1,700	15,000/1,700	15,000/1,700	15,000/1,700
Center Front	15,000/1,700	—	15,000/1,700	—
Center Rear	5,000/700	—	5,000/700	—
Right Front	20,000/1,300	15,000/1,700	20,000/1,300	15,000/1,700
Right Rear	15,000/1,700	5,000/700	15,000/1,700	5,000/700
20,000 BTU Dual-Stacked PowerBurner(s)	■	■	■	■
Electric Griddle (1,320 Watts)	■	■	—	—
Convertible to LP <sup>B</sup>	■	■	■	■
<b>CONTROL FEATURES</b>				
Oversized Stainless Steel Knobs with Diamond Etching	■	■	■	■
Electronic Ignition and Flame-Sensing™ Re-ignition	■	■	■	■
<b>OPTIONAL ACCESSORIES</b>				
9" Stainless Steel Backsplash	W10115777	W10115776	W10115776	W10115776
Stainless Steel Backsplash with Two Shelves	W10285449	W10285448	W10285448	W10285447
Stainless Steel Griddle Cover	W10160195	W10160195	—	—
High Altitude Kit (LP)	W10237848	W10237848	W10237848	W10237848
High Altitude Kit (Natural Gas)	W10160841	W10160841	W10160841	W10160841
Wok Ring	W10216179	W10216179	W10216179	W10216179
<b>EXTERIOR DESIGN FEATURES</b>				
Cast Iron Grates	■	■	■	■
Island Trim Piece	■	■	■	■
Style Option (add letter to end of model number) Pro-Style® Stainless	P	P	P	P

A. Depth includes knobs.

B. LP kit included. Gas rangetops are factory set for natural gas. Consult online Installation Instructions for LP BTU ratings.



**IMPORTANT:** Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to installation instructions packaged with product *before* selecting cabinetry, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

## ✓ DOWNDRAFT COOKTOPS EXQUISITE INNOVATION

The Jenn-Air brand's legacy of innovation began with introducing downdraft ventilation to the world of kitchen design, enabling open concept kitchens and making the kitchen an integral part of the home. 36- and 30-inch induction, gas or electric downdraft cooktops eliminate the need for overhead ventilation, making them ideal for design-conscious homeowners who desire expanded kitchen layout possibilities.



Because downdraft ventilation occurs at the cooking source, vapors are captured before they can escape. This means that fewer CFM are required to capture those vapors, resulting in a quiet ventilation system and a quiet kitchen.



Whether the system is our **JX3™ downdraft ventilation system** or the **perimetric extraction** version available on electric models, our exclusive **duct-free installation** option makes a downdraft cooktop suitable for any kitchen, including those where traditional ductwork is impractical.

In addition, all Jenn-Air® downdraft cooktops feature elements or burners that are among the most powerful in their class. Gas cooktops include an **ultra-high output burner** that produces the robust heat necessary for searing steak or stir-frying. Fast and **flexible induction elements** utilize the entire cooking surface to allow the use of multiple, differently sized cookware at the same time. And the electric models' **Triple-Choice™ and Dual-Choice™ elements** offer versatility in the form of multiple, different sized elements in the same location.



## 36" JX3™ Gas Downdraft Cooktop

**JGD3536G** – 36"**Style Options:**

S Euro-Style Stainless



B Black

- JX3™ downdraft ventilation system with 3 speeds
- Convertible to duct-free ventilation with duct-free filter kit (purchased separately)
- 17,000 BTU ultra-high output burner
- Electronic ignition and Flame-Sensing™ re-ignition
- 5 sealed brass burners with removable base
- DuraFinish® protection

Overall Product Dimensions  
36" w x 21 1/2" d

## 36" JX3™ Electric Radiant Downdraft Cooktop with Glass-Touch Electronic Controls

**JED4536G** – 36"**Style Options:**

S Euro-Style Stainless



B Black Floating Glass

- JX3™ perimetric downdraft ventilation system with 3 speeds
- Convertible to duct-free ventilation with duct-free filter kit (purchased separately)
- Glass-touch electronic controls
- DuraFinish® glass protection
- 12"9"6" Triple-Choice™ element



## 30" JX3™ Gas Downdraft Cooktop

**JGD3430G** – 30"**Style Options:**

S Euro-Style Stainless



B Black

- JX3™ downdraft ventilation system with 3 speeds
- Convertible to duct-free ventilation with duct-free filter kit (purchased separately)
- 17,000 BTU ultra-high output burner
- Electronic ignition and Flame-Sensing™ re-ignition
- 4 sealed brass burners with removable base
- DuraFinish® protection

Overall Product Dimensions  
30" w x 21 1/2" d

## 36" JX3™ Electric Radiant Downdraft Cooktop

**JED3536G** – 36"**Style Options:**

S Euro-Style Stainless



B Black Floating Glass

- JX3™ perimetric downdraft ventilation system with 3 speeds
- Convertible to duct-free ventilation with duct-free filter kit (purchased separately)
- DuraFinish® glass protection
- 12"9"6" Triple-Choice™ element



## 36" Induction Downdraft Cooktop

**JID4436E** – 36"**Style Option:**

S Euro-Style Stainless

- Flexible induction elements
- Bridge function
- 350 CFM blower capacity
- Convertible to duct-free ventilation with duct-free filter kit
- Glass-touch electronic controls

Overall Product Dimensions  
36" w x 21 1/32" d

## 30" JX3™ Electric Radiant Downdraft Cooktop with Glass-Touch Electronic Controls

**JED4430G** – 30"**Style Options:**

S Euro-Style Stainless



B Black Floating Glass

- JX3™ perimetric downdraft ventilation system with 3 speeds
- Convertible to duct-free ventilation with duct-free filter kit (purchased separately)
- Glass-touch electronic controls
- DuraFinish® glass protection
- 10"6" Dual-Choice™ element



## 30" JX3™ Electric Radiant Downdraft Cooktop

**JED3430G** – 30"**Style Options:**

S Euro-Style Stainless



B Black Floating Glass

- JX3™ perimetric downdraft ventilation system with 3 speeds
- Convertible to duct-free ventilation with duct-free filter kit (purchased separately)
- DuraFinish® glass protection
- 10"6" Dual-Choice™ element



## Wok

### AO142

- For use with gas burners and electric elements
- Nonstick surface
- Includes lid, steaming rack and rice paddles
- Not for use with Wok Ring W10216179



## Duct-Free Filter Kit

### JDA7000WX

- Allows JX3™ downdraft cooktops to be installed in any home without requiring ductwork
- Ideal for a high-rise or condominium
- Includes duct-free filter



## Duct-Free Filter

### W10177003


- For use with JX3™ downdraft cooktops and duct-free filter kit to capture smoke, grease and moisture
- Features a replacement indicator



## Duct-Free Filter Kit

### W10807915

- Allows induction downdraft cooktops to be installed in any home without requiring ductwork
- Ideal for a high-rise or condominium
- Includes duct-free filter
- Available Q4 2017

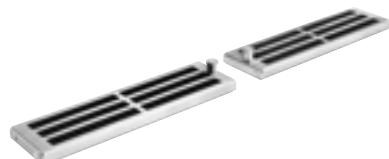

## Duct-Free Filter

### W10807916

- For use with induction downdraft cooktops and duct-free filter kit to capture smoke, grease and moisture
- Features a replacement indicator
- Available Q4 2017

## JX3™ Gas Downdraft Cooktops

	36"	30"
MODEL #	JGD3536G	JGD3430G
Overall Product Dimensions – w x d (in)	36 x 21 <sup>1</sup> / <sub>2</sub>	30 x 21 <sup>1</sup> / <sub>2</sub>
Opening/Clearance Dimensions – w x d (in)	34 <sup>3</sup> / <sub>4</sub> x 19 <sup>15</sup> / <sub>16</sub>	28 <sup>5</sup> / <sub>8</sub> x 19 <sup>15</sup> / <sub>16</sub>
Approximate Shipping Weight (lb)	90	76
Volts/Amps Required	120/15	120/15
COOKING SURFACE FEATURES		
Sealed Burners	5	4
Natural Gas BTUs: High/Low		
Left Front	10,000/2,000	17,000/3,000
Left Rear	5,000/1,500	5,000/1,500
Center Front	15,000/3,000	—
Center Rear	12,500/2,000	—
Right Front	—	10,000/2,000
Right Rear	—	15,000/3,000
Right Side	17,000/3,000	—
JX3™ Downdraft Ventilation System with 3 Speeds	■	■
CFM Rating	310	310
Easy-to-Clean Short Plenum	■	■
Dishwasher-Safe Air Grill	■	■
Dishwasher-Safe Burner Grates and Caps	■	■
Brass Burners with Removable Base	■	■
Exterior Venting	6" Round	6" Round
Convertible to Duct-Free Ventilation <sup>A</sup>	■	■
Convertible to LP <sup>B</sup>	■	■
CONTROL FEATURES		
Color-Coordinating Euro-Style Knobs	■	■
Dishwasher-Safe Knobs	■	■
Electronic Ignition and Flame-Sensing™ Re-ignition	■	■
Infinite Burner Control Settings	■	■
OPTIONAL ACCESSORIES		
Wok	AO142	AO142
Duct-Free Filter Kit	JDA7000WX	JDA7000WX
Duct-Free Filter	W10177003	W10177003
EXTERIOR DESIGN FEATURES		
Porcelain-on-Cast Iron Continuous Grates	■	■
Stainless Steel Surface with DuraFinish® Protection	■	■
Style Options (add letter to end of model number)		
Euro-Style Stainless <sup>C</sup>	S	S
Black <sup>D</sup>	B	B

A. Duct-free filter kit not included.

B. LP kit included. Gas cooktops are factory set for natural gas. Consult online Installation Instructions for LP BTU ratings.

C. Includes Euro-Style Stainless knobs.

D. Includes Black Chrome knobs.

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to installation instructions packaged with product *before* selecting cabinetry, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

## Induction Downdraft Cooktops

		36"	JID4436E
Overall Product Dimensions – w x d (in)		36 x 21 <sup>11/32</sup>	
Opening/Clearance Dimensions – w x d (in)		35 <sup>7/16</sup> x 20 <sup>7/8</sup>	
Approximate Shipping Weight (lb)		145	
Volts/Amps Required		240/40	
<b>COOKING SURFACE FEATURES</b>			
Flexible Induction Elements		4	
Element Size and Wattage			
Left Element		3,700	
Right Element		3,700	
Bridge Function		■	
Performance Boost		■	
Keep Warm™ Function		■	
Pan Detection		■	
LED Ambient Lighting		■	
Quiet Operation		■	
Downdraft Ventilation System with 2 Speeds		■	
CFM Rating		350	
Exterior Venting		3 <sup>1/4</sup> " Rectangular or 6" Round	
Convertible to Duct-Free Ventilation <sup>A</sup>		■	
<b>CONTROL FEATURES</b>			
Glass-Touch Electronic Controls		■	
Hot Surface Indicator Lights		■	
Element Timers		■	
<b>OPTIONAL ACCESSORIES</b>			
Duct-Free Filter Kit		W10807915	
Duct-Free Filter		W10807916	
<b>EXTERIOR DESIGN FEATURES</b>			
Ceramic Glass Surface		■	
Style Options (add letter to end of model number)			
Euro-Style Stainless <sup>b</sup>		S	

A. Duct-free kit not included.  
B. Black Glass with stainless steel trim.

## JX3™ Electric Radiant Downdraft Cooktops

		36"	30"		
MODEL #		JED4536G	JED3536G	JED4430G	JED3430G
Overall Product Dimensions – w x d (in)		36 <sup>5/16</sup> x 23	36 x 23	30 <sup>7/8</sup> x 22 <sup>1/2</sup>	30 <sup>7/8</sup> x 23
Opening/Clearance Dimensions – w x d (in)		34 <sup>9/16</sup> x 21 <sup>1/8</sup>	34 <sup>9/16</sup> x 21 <sup>1/8</sup>	28 <sup>7/8</sup> x 21 <sup>1/8</sup>	28 <sup>7/8</sup> x 21 <sup>1/8</sup>
Approximate Shipping Weight (lb)		73	73	67	67
Volts/Amps Required		240/40	240/40	240/40	240/40
<b>COOKING SURFACE FEATURES</b>					
Radiant Elements		5	5	4	4
Element Size and Wattage					
Left Front		6" – 1,300	6" – 1,300	10" – 3,000/6" – 1,400	10" – 3,200
Left Rear		8" – 1,800	8" – 1,800	6" – 1,300	6" – 1,300
Center Front		10" – 3,000/6" – 1,400	10" – 3,200/6" – 2,300	—	—
Center Rear		6" – 1,200	6" – 1,200	—	—
Right Front		—	—	6" – 1,200	6" – 1,200
Right Rear		—	—	9" – 3,000/6" – 1,400	10" – 3,000/6" – 1,400
Right Side		12" – 4,500/9" – 3,100/ 6" – 1,550	12" – 3,000/9" – 1,950/ 6" – 1,050	—	—
12 <sup>9/16</sup> " Triple-Choice™ Element		■	■	—	—
10 <sup>1/2</sup> " Dual-Choice™ Element		■	■	■	■
9 <sup>1/2</sup> " Dual-Choice™ Element		—	—	■	—
JX3™ Downdraft Ventilation System with 3 Speeds		■	■	■	■
CFM Rating		310	310	310	310
Easy-to-Clean Short Plenum		■	■	■	■
Dishwasher-Safe Air Grill		■	■	■	■
Exterior Venting		6" Round	6" Round	6" Round	6" Round
Convertible to Duct-Free Ventilation <sup>A</sup>		■	■	■	■
<b>CONTROL FEATURES</b>					
Glass-Touch Electronic Controls		■	—	■	—
Color-Coordinator Die-Cast Metal Knobs		—	■	—	■
Hot Surface Indicator Light(s)		5	■	4	■
<b>OPTIONAL ACCESSORIES</b>					
Wok		AO142	AO142	AO142	AO142
Duct-Free Filter Kit		JDA7000WX	JDA7000WX	JDA7000WX	JDA7000WX
Duct-Free Filter		W10177003	W10177003	W10177003	W10177003
<b>EXTERIOR DESIGN FEATURES</b>					
Ceramic Glass Surface		■	■	■	■
Style Options (add letter to end of model number)					
Euro-Style Stainless <sup>b</sup>		S	S	S	S
Black Floating Glass <sup>c</sup>		B	B	B	B

A. Duct-free filter kit not included.  
B. Black glass with stainless steel accents.  
C. Includes black knobs.

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to installation instructions packaged with product *before* selecting cabinetry, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to installation instructions packaged with product *before* selecting cabinetry, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

## COOKTOPS

### PRECISE POWER

A Jenn-Air® cooktop, whether fueled by gas, electric or induction, features a low-profile design that sits nearly flush with the countertop, providing an integrated transition between cooktop and countertop. This minimal design has maximum impact, with clean lines and a seamless look that complements any kitchen décor.



Each Jenn-Air® cooktop features elements or burners that are among the most powerful in their class. Select gas cooktops feature our versatile **dual-stacked PowerBurner**. This two-in-one burner delivers both the high power needed for rapid boiling or searing and the gentle flame needed for delicate tasks like melting cheeses or chocolates.



Our gas cooktops also include a dedicated high-precision simmer burner that allows the simultaneous preparation of high heat and low heat dishes.

For those who desire the low-profile design of ceramic glass, Jenn-Air® electric cooktops feature responsive **Dual-Choice™ and Triple-Choice™ elements**, which provide the flexibility of two or three different-sized elements in the same location, allowing for use of both large and small pans.




With a cooking surface similar to an electric radiant cooktop, our induction cooktop's **Performance Boost function** allows the use of higher-than-maximum heat for up to ten minutes to sear or stir-fry. To accommodate large or long pans, like griddles, an **induction bridge element** expands the cooking surface by combining two smaller elements.



## 36" Glass 5-Burner Gas Cooktop

**JGC2536E** – 36"**Style Option:**

- 18,000 BTU dual-stacked PowerBurner
- 6,000 BTU Simmer burner with melt cap
- Single point electronic ignition and Flame-Sensing™ re-ignition
- Ceramic glass surface
- Euro-Style barrel knobs
- 5 sealed burners

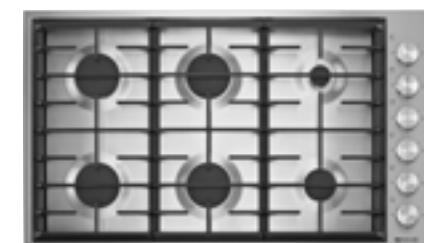Overall Product Dimensions  
36" w x 21" d

## 36" Gas Cooktop

**JGC7636B** – 36"**Style Options:**


- 18,000 BTU PowerBurner
- Three 15,000 BTU burners
- 6,000 BTU Simmer burner
- Single point electronic ignition and Flame-Sensing™ re-ignition
- 6 sealed brass burners
- Low-profile design enables near-flush installation

Overall Product Dimensions  
36" w x 21" d

## 30" Glass 5-Burner Gas Cooktop

**JGC2530E** – 30"**Style Option:**

- 18,000 BTU dual-stacked PowerBurner
- 6,000 BTU Simmer burner with melt cap
- Single point electronic ignition and Flame-Sensing™ re-ignition
- Ceramic glass surface
- Euro-Style barrel knobs
- 5 sealed burners

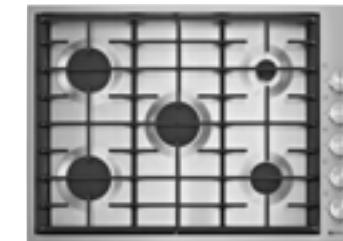Overall Product Dimensions  
30" w x 21" d

## 30" Gas Cooktop

**JGC7530B** – 30"**Style Options:**

- 18,000 BTU PowerBurner
- 6,000 BTU Simmer burner
- Single point electronic ignition and Flame-Sensing™ re-ignition
- 5 sealed brass burners
- Low-profile design enables near-flush installation

Overall Product Dimensions  
30" w x 21" d

## Find Your Perfect Ventilation Match


Jenn-Air® ventilation systems remove steam, smoke and odors generated by cooking processes to help ensure a fresh, clean kitchen before dinner is served. See pages 119-123 to find a system that fits your cooking surface.



## Low Profile Design

Nearly flush with the countertop, Jenn-Air® stainless steel gas cooktops provide an integrated transition from countertop to the cooktop with an exceedingly low profile of nearly 3 mm. The minimal look has the maximum impact with robust, continuous grates, slightly elevated for optimal cooking efficiency and pan stability. The clean lines of this seamless look complement any kitchen décor.



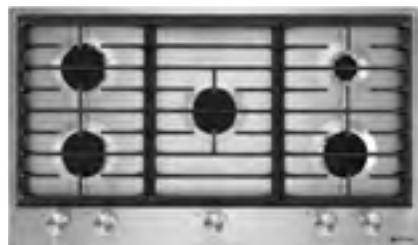

## 36" Gas Cooktop

**JGC3536G** – 36"

## Style Options:

S Euro-Style  
Stainless

W10678586 (see page 60)

- 20,000 BTU dual-stacked PowerBurner
- 6,000 BTU Simmer burner with melt cap
- Single point electronic ignition and Flame-Sensing™ re-ignition
- 5 sealed brass burners with removable base
- Low-profile design with true flush installation option
- White LED backlit knobs

Overall Product Dimensions  
36" w x 21" d


## 15" Modular Electric Griddle

**JEF3115G** – 15"

## Style Option:

S Euro-Style  
Stainless

- 1,800-watt electric griddle
- Low-profile design with true flush installation option
- White LED backlit knob

Overall Product Dimensions  
15" w x 21" d

## 30" Gas Cooktop

**JGC3530G** – 30"

## Style Options:

S Euro-Style  
Stainless

W10678586 (see page 60)

- 20,000 BTU dual-stacked PowerBurner
- 6,000 BTU Simmer burner with melt cap
- Single point electronic ignition and Flame-Sensing™ re-ignition
- 5 sealed brass burners with removable base
- Low-profile design with true flush installation option
- White LED backlit knobs

Overall Product Dimensions  
30" w x 21" d

## 15" Modular Induction Cooktop

**JIC4715G** – 15"

## Style Option:

S Euro-Style  
Stainless

- 2 flexible induction elements
- Low-profile design with true flush installation option
- Glass-touch electronic controls
- Available Q4 2017

Overall Product Dimensions  
15" w x 21" d

## 15" 2-Burner Modular Gas Cooktop

**JGC3215G** – 15"

## Style Option:

S Euro-Style  
Stainless

- 15,000 BTU dual-stacked PowerBurner
- Single point electronic ignition and Flame-Sensing™ re-ignition
- 2 sealed brass burners with removable base
- Low-profile design with true flush installation option
- White LED backlit knobs

Overall Product Dimensions  
15" w x 21" d

## 15" Modular Induction Wok

**JIE4115G** – 15"

## Style Option:

S Euro-Style  
Stainless

- Concave glass bowl design accepts 14-inch round-bottom induction wok (purchased separately)
- Low-profile design with true flush installation option
- Glass-touch electronic controls
- Available Q4 2017

Overall Product Dimensions  
15" w x 21" d


## 15" Single-Burner Modular Gas Cooktop with Wok Ring

**JGC3115G** – 15"

## Style Option:

S Euro-Style  
Stainless

- 20,000 BTU commercial-style dual ring burner
- Single point electronic ignition and Flame-Sensing™ re-ignition
- Brass burner with removable base
- Low-profile design with true flush installation option
- White LED backlit knob

Overall Product Dimensions  
15" w x 21" d

## 4" Modular Downdraft Vent

**JVD0303G** – 4"

## Style Option:

S Euro-Style  
Stainless

- 350 CFM blower capacity
- Convertible to duct-free ventilation with duct-free filter kit (purchase separately)
- Low-profile design with true flush installation option
- Available Q4 2017

Overall Product Dimensions  
4" w x 21" d



## Induction Technology

Jenn-Air® induction. Cooks like gas, looks like electric, outperforms both. Heat created directly in the cookware makes it the heat source which, in turn, cooks the food. And, with the touch of a button, the Sensor Boil feature will bring even large stockpots quickly to a boil.



### 36" Induction Cooktop

**JIC4536X** – 36"

#### Style Options:



**S** Euro-Style  
Stainless



**B** Black  
Floating  
Glass

- Induction technology
- 12"9" – 5,000-watt Dual Zone element
- Sensor Boil function
- Performance Boost function
- Four 7" – 2,500-watt elements with Bridge function

Overall Product Dimensions  
36<sup>5</sup>/<sub>16</sub>" w x 21<sup>5</sup>/<sub>16</sub>" d



### 36" Electric Radiant Cooktop with Glass-Touch Electronic Controls

**JEC4536B** – 36"

#### Style Options:




**S** Euro-Style  
Stainless



**B** Black  
Floating  
Glass

- Glass-touch electronic controls
- 12"9"6" Triple-Choice™ element
- 10"6" Dual-Choice™ element
- Precise Power® function available on all elements
- Simmer, Melt and Keep Warm™ functions available on all elements

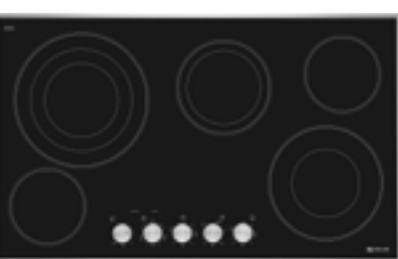

### 36" Electric Radiant Cooktop

**JEC3536B** – 36"

#### Style Options:



**S** Euro-Style  
Stainless



**B** Black  
Floating  
Glass

- 12"9"6" Triple-Choice™ element
- 10"6" and 8"6" Dual-Choice™ elements
- Melt function on Simmer/Melt element
- Euro-Style barrel knobs
- 5 radiant elements



### 30" Induction Cooktop

**JIC4430X** – 30"

#### Style Options:



**S** Euro-Style  
Stainless



**B** Black  
Floating  
Glass

- Induction technology
- 11" – 3,700-watt element
- Sensor Boil function
- Performance Boost function
- Two 7" – 2,500-watt elements with Bridge function

Overall Product Dimensions  
30<sup>5</sup>/<sub>16</sub>" w x 21<sup>5</sup>/<sub>16</sub>" d



Overall Product Dimensions  
31" w x 22<sup>3</sup>/<sub>16</sub>" d



Overall Product Dimensions  
31" w x 22<sup>3</sup>/<sub>16</sub>" d

### 30" Electric Radiant Cooktop

**JEC4430B** – 30"

#### Style Options:



**S** Euro-Style  
Stainless



**B** Black  
Floating  
Glass

- Glass-touch electronic controls
- 12"9"6" Triple-Choice™ element
- 10"6" Dual-Choice™ element
- Melt function on Simmer/Melt element
- Euro-Style barrel knobs
- 4 radiant elements



## Wok

### AO142

- For use with gas burners and electric elements
- Nonstick surface
- Includes lid, steaming rack and rice paddles
- Not for use with Wok Ring W10216179



## Pro-Style® Stainless Knob Kit

### W10678586


- For use with gas cooktops JGC3536G or JGC3530G
- To complement Pro-Style® Stainless suites
- Includes five knobs



## Duct-Free Filter Kit

### W10807915

- For use with 4" modular downdraft vent to be installed in any home without requiring ductwork
- Ideal for a high-rise or condominium
- Includes duct-free filter
- Available Q4 2017

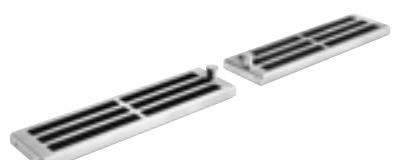

## Duct-Free Filter

### W10807916

- For use with duct-free filter kit to capture smoke, grease and moisture
- Features a replacement indicator
- Available Q4 2017

## Gas Cooktops

MODEL #	36"	30"	36"	30"
Overall Product Dimensions – w x d (in)	36 x 21	36 x 21	30 x 21	30 x 21
Opening/Clearance Dimensions – w x d (in)	35 <sup>3</sup> / <sub>8</sub> x 20 <sup>3</sup> / <sub>8</sub>	35 <sup>3</sup> / <sub>8</sub> x 20 <sup>3</sup> / <sub>8</sub>	29 <sup>3</sup> / <sub>8</sub> x 20 <sup>3</sup> / <sub>8</sub>	29 <sup>3</sup> / <sub>8</sub> x 20 <sup>3</sup> / <sub>8</sub>
Approximate Shipping Weight (lb)	75	78	67	64
Volts/Amps Required	120/15	120/15	120/15	120/15
<b>COOKING SURFACE FEATURES</b>				
Sealed Burners	5	6	5	5
Natural Gas BTUs: High/Low				
Left Front	9,000/1,450	18,000/2,200	9,000/1,450	18,000/2,200
Left Rear	12,000/2,400	15,000/2,200	12,000/2,400	12,000/2,200
Center Front	18,000/1,350	15,000/2,200	18,000/1,350	15,000/2,200
Center Rear	—	15,000/2,200	—	—
Right Front	6,000/1,000	9,000/1,200	6,000/1,000	9,000/1,200
Right Rear	12,000/2,400	6,000/800	12,000/2,400	6,000/800
Convertible to LP <sup>A</sup>	■	■	■	■
Aluminum Burners	■	—	■	—
Brass Burners	—	■	—	■
Melt Cap	■	—	■	—
One-Piece Cooktop	—	■	—	■
<b>CONTROL FEATURES</b>				
Die-Cast Metal Knobs	—	■	—	■
Stainless Steel Knobs	■	—	■	—
Single Point Electronic Ignition	■	■	■	■
Flame-Sensing™ Re-ignition	■	■	■	■
White LED Burner Indicator	—	■	—	■
Infinite Burner Control Settings	■	■	■	■
<b>OPTIONAL ACCESSORIES</b>				
Wok	AO142	AO142	AO142	AO142
High Altitude Kit (LP)	W10686630	—	W10686630	—
High Altitude Kit (Natural Gas)	W10686629	—	W10686629	—
<b>EXTERIOR DESIGN FEATURES</b>				
Heavy-Duty, Cast Iron Grates	Individual	Continuous	Individual	Continuous
Stainless Steel Surface	—	■	—	■
Ceramic Glass Surface	■	—	■	—
Low-Profile Design Enables Near-Flush Installation	—	■	—	■
Installation Over Single Wall Oven	■	■	■	■
Style Options (add letter to end of model number)				
Pro-Style® Stainless <sup>B</sup>	—	P	—	P
Euro-Style Stainless <sup>C</sup>	—	S	—	S
Black Floating Glass <sup>D</sup>	B	—	B	—

A. LP kit included. Gas cooktops are factory set for natural gas. Consult online Installation Instructions for LP BTU ratings.

B. With Pro-Style® knobs.

C. With Euro-Style barrel knobs.

D. Compatible with Euro-Style Stainless.

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to installation instructions packaged with product *before* selecting cabinetry, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

## Gas Cooktops

	36"	30"
MODEL #	JGC3536G	JGC3530G
Overall Product Dimensions – w x d (in)	36 x 21	30 x 21
Opening/Clearance Dimensions – w x d (in)	35 <sup>3/8</sup> x 20 <sup>3/8</sup>	29 <sup>3/8</sup> x 20 <sup>3/8</sup>
Approximate Shipping Weight (lb)	77	68
Volts/Amps Required	120/15	120/15
<b>COOKING SURFACE FEATURES</b>		
Sealed Burners	5	5
Natural Gas BTUs: High/Low Left Front	12,000/2,400	12,000/2,400
Left Rear	15,000/2,400	12,000/2,400
Center Front	20,000/900	20,000/900
Right Front	12,000/2,400	9,000/1,450
Right Rear	6,000/1,000	6,000/1,000
Convertible to LP <sup>A</sup>	■	■
Brass Burners	■	■
Melt Cap	■	■
One-Piece Cooktop	■	■
<b>CONTROL FEATURES</b>		
Euro-Style Stainless Steel Barrel Knobs	■	■
Single Point Electronic Ignition	■	■
Flame-Sensing™ Re-ignition	■	■
Infinite Burner Control Settings	■	■
<b>OPTIONAL ACCESSORIES</b>		
Wok	W11035423	W11035423
Pro-Style® Knob Kit	W10678586	W10678586
<b>EXTERIOR DESIGN FEATURES</b>		
Heavy-Duty, Cast Iron Grates	Continuous	Continuous
Stainless Steel Surface	■	■
Low-Profile Design Enables Near-Flush Installation	■	■
Installation Over Single Wall Oven	■	■
Style Options (add letter to end of model number) Euro-Style Stainless <sup>B</sup>	S	S

A. LP kit included. Gas cooktops are factory set for natural gas. Consult online Installation Instructions for LP BTU ratings.

B. With Euro-Style barrel knobs.

## Cooktop Modules

	JGC3215G	JGC3115G	JEF3115G	JIC4715GS	JIE4115GS	4" JVD0303GS
MODEL #						
Overall Product Dimensions – w x d (in)	15 x 21	4 x 21				
Opening/Clearance Dimensions – w x d (in)	14 <sup>3/8</sup> x 20 <sup>3/8</sup>	N/A <sup>C</sup>				
Approximate Shipping Weight (lb)	35	34	46	34	39	46
Volts/Amps Required	120/15	120/15	240/15	240/15	240/15	120/15
<b>GAS COOKTOP SURFACE FEATURES</b>						
Sealed Burners	2	1	—	—	—	—
Natural Gas BTUs: High/Low Center Front	15,000/2,400	—	—	—	—	—
Center Rear	15,000/2,400	—	—	—	—	—
Center	—	20,000/700	—	—	—	—
Convertible to LP <sup>A</sup>	■	■	—	—	—	—
Brass Burner(s) with Removable Base	■	■	—	—	—	—
One-Piece Cooktop	■	■	—	—	—	—
<b>GRIDDLE SURFACE FEATURES</b>						
Electric Griddle (1,800 Watts)	—	—	■	—	—	—
<b>INDUCTION SURFACE FEATURES</b>						
Flexible Induction Elements	—	—	—	2	—	—
Bridge Function	—	—	—	1	—	—
Induction Wok Element	—	—	—	—	■	—
Performance Boost	—	—	—	■	■	—
Pan Detection	—	—	—	■	■	—
Keep Warm™ Function	—	—	—	■	■	—
<b>DOWNDRAFT FEATURES</b>						
350 CFM Blower Capacity	—	—	—	—	—	■
Convertible To Duct-Free Ventilation	—	—	—	—	—	■
Two Fan Speed Settings	—	—	—	—	—	■
<b>CONTROL FEATURES</b>						
Euro-Style Stainless Steel Barrel Knob(s)	■	■	■	—	—	—
Single Point Electronic Ignition	■	■	—	—	—	—
Flame-Sensing™ Re-ignition	■	■	—	—	—	—
White LED Backlit Knob(s)	■	■	■	—	—	—
Infinite Burner Control Settings	■	■	—	—	—	—
Electronic Touch Controls	—	—	—	Glass-Touch	Glass-Touch	■
Hot Surface Indicators	—	—	—	■	■	—
Control Lock	—	—	—	■	■	—
Timer Function	—	—	—	—	—	■
<b>OPTIONAL ACCESSORIES</b>						
Duct-Free Filter Kit	—	—	—	—	—	W10807915
Replacement Charcoal Filter	—	—	—	—	—	W10807916
<b>EXTERIOR DESIGN FEATURES</b>						
Heavy-Duty, Cast Iron Grates	■	■	—	—	—	—
Stainless Steel Surface	■	■	■	—	—	■
Ceramic Glass Surface	—	—	—	■	■	—
Concave Glass Bowl Design	—	—	—	—	■	—
LED Ambient Lighting	—	—	—	—	—	■
True Flush Installation Option	■	■	■	■	■	■
Low-Profile Design Enables Near-Flush Installation	■	■	■	■	■	■
Installation Over Single Wall Oven	■	■	■	■	■	—
Style Options (add letter to end of model number) Euro-Style Stainless <sup>B</sup>	S	S	S	S	S	S

A. LP kit included. Gas cooktops are factory set for natural gas. Consult online Installation Instructions for LP BTU ratings.

B. With Euro-Style barrel knobs.

C. The 4" downdraft vent is designed to be installed next to a cooktop. See installation instructions for cutout information.

## Induction Cooktops

MODEL #	36"	30"
	JIC4536X	JIC4430X
Overall Product Dimensions – w x d (in)	36 <sup>5</sup> / <sub>16</sub> x 21 <sup>5</sup> / <sub>16</sub>	30 <sup>5</sup> / <sub>16</sub> x 21 <sup>5</sup> / <sub>16</sub>
Opening/Clearance Dimensions – w x d (in)	33 <sup>1</sup> / <sub>16</sub> x 19 <sup>5</sup> / <sub>16</sub>	29 <sup>1</sup> / <sub>2</sub> x 19 <sup>5</sup> / <sub>16</sub>
Approximate Shipping Weight (lb)	66	53
Volts/Amps Required	240/50	240/40
<b>COOKING SURFACE FEATURES</b>		
Induction Elements	5	4
Element Size and Wattage Left Front	7" – 2,500	7" – 2,500
Left Rear	7" – 2,500	7" – 2,500
Center	12" – 5,000/9" – 2,800	6" – 1,800
Right Front	7" – 2,500	—
Right Rear	7" – 2,500	11" – 3,700
12 <sup>1</sup> / <sub>2</sub> "/9" Dual Zone Induction Element	■	—
Bridge Function	■	■
Heat Level Settings	13	13
Sensor Boil Function	■	■
Performance Boost Function	■ <sup>A</sup>	■
Simmer Function	■	■
Melt Function	■	■
Keep Warm™ Function	■	■
Pan Detection	■	■
<b>CONTROL FEATURES</b>		
Touch-Activated Controls with Power Slider	■	■
Cooktop Power Off Function	■	■
Power On Indicator Light	5	4
Hot Surface Indicators	5	4
Element Timers	5	4
Control Lock	■	■
<b>EXTERIOR DESIGN FEATURES</b>		
Ceran® Ceramic Glass Surface	■	■
Installation Over Single Wall Oven	■	■
Control Area Color	Black	Black
Style Options (add letter to end of model number) Euro-Style Stainless <sup>B</sup>	S	S
Black Floating Glass	B	B

A. Not available on outer ring of Dual Zone induction element.  
B. Black glass with stainless steel trim.

## Electric Cooktops

MODEL #	36"	30"	36"	30"
	JEC4536B	JEC3536B	JEC4430B	JEC3430B
Overall Product Dimensions – w x d (in)	36 <sup>7</sup> / <sub>8</sub> x 21 <sup>3</sup> / <sub>4</sub>	36 <sup>7</sup> / <sub>8</sub> x 21 <sup>3</sup> / <sub>4</sub>	31 x 21 <sup>3</sup> / <sub>4</sub>	31 x 21 <sup>3</sup> / <sub>4</sub>
Opening/Clearance Dimensions – w x d (in)	35 <sup>1</sup> / <sub>2</sub> x 20 <sup>1</sup> / <sub>2</sub>	35 <sup>1</sup> / <sub>2</sub> x 20 <sup>1</sup> / <sub>2</sub>	29 <sup>1</sup> / <sub>2</sub> x 20 <sup>1</sup> / <sub>2</sub>	29 <sup>1</sup> / <sub>2</sub> x 20 <sup>1</sup> / <sub>2</sub>
Approximate Shipping Weight (lb)	54	54	47	47
Volts/Amps Required	240/40	240/40	240/40	240/40
<b>COOKING SURFACE FEATURES</b>				
Radiant Elements	5	5	4	4
Element Size and Wattage Left Front	10" – 2,500/6" – 1,200	6" – 700	—	6" – 1,300/300
Left Rear	6" – 700	12" – 3,000/9" – 2,200/6" – 1,100	6" – 1,200	10" – 3,000/6" – 1,400
Center Front	—	—	12" – 4,500/9" – 3,000/6" – 1,500	—
Center Rear	12" – 4,500/9" – 3,000/6" – 1,500	8" – 2,000/6" – 1,000	6" – 1,200	—
Right Front	10" – 2,500/6" – 1,200	10" – 2,500/6" – 1,200	—	12" – 3,000/9" – 2,200/6" – 1,100
Right Rear	6" – 1,200	6" – 1,300/300	10" – 3,000/6" – 1,400	6" – 1,200
12 <sup>1</sup> / <sub>2</sub> "/9" Triple-Choice™ Element	■	■	■	■
10 <sup>1</sup> / <sub>2</sub> "/6" Dual-Choice™ Element	■	■	■	■
8 <sup>1</sup> / <sub>2</sub> "/6" Dual-Choice™ Element	—	■	—	—
6" Simmer/Melt Element	—	■	—	■
<b>CONTROL FEATURES</b>				
Glass-Touch Electronic Controls	■	—	■	—
Die-Cast Metal Knobs	—	Euro-Style Barrel	—	Euro-Style Barrel
Cooktop Power Off Function	■	■	■	■
Power On Indicator Light	5	5	4	4
Hot Surface Indicators	5	5	4	4
Precise Power® Function Available on All Elements	■	—	■	—
Simmer Function Available on All Elements	■	—	■	—
Melt Function Available	All	1	All	1
Keep Warm™ Function Available on All Elements	■	—	■	—
Control Lock	■	—	■	—
<b>OPTIONAL ACCESSORY</b>				
Wok	AO142	AO142	AO142	AO142
<b>EXTERIOR DESIGN FEATURES</b>				
Ceramic Glass Surface	■	■	■	■
Elegant Beveled Edge	■	■	■	■
Installation Over Single Wall Oven	■	■	■	■
Style Options (add letter to end of model number) Euro-Style Stainless <sup>A</sup>	S	S	S	S
Black Floating Glass	B	B	B	B

A. Black glass with stainless steel trim and knobs.

## ✓ PRO-STYLE® RANGES A BOLD CENTERPIECE

A Jenn-Air® Pro-Style® range is the centerpiece of a bold, commercially-styled kitchen, lending it timeless class and impressive performance. These ranges are available in 48-, 36- or 30-inch widths and an array of cooking surface configurations in both natural gas and LP gas, allowing homeowners to select the model that best fits their cooking style.



A Pro-Style® range's cooktop layout is designed to allow maximum freedom when cooking, while using the proper power level and burner size for superior results. Pro-Style® range cooktops have **four or six versatile burners**, including a **dual-stacked PowerBurner** which provides the flexibility of two burners in one location with both high and low heat capabilities. In addition, a dedicated **simmer burner** can achieve gentle lows that are ideal for simmering sauces and fragrant soups as well as melting delicate chocolate.



These burners can be matched with a **high-performance chrome electric griddle** that is ideal for quickly searing fish, shrimp or steak while radiating less heat into the kitchen.

All Pro-Style® ranges feature a large-capacity oven with the **Dual-Fan MultiMode® True Convection System**, which distributes heat throughout the oven for even coverage on every rack. For those who use their oven frequently, the 48-inch model's double-oven allows cooks to simultaneously prepare dishes that require different temperatures.



### 48" Pro-Style® Dual-Fuel Range with Griddle and Dual-Fan MultiMode® True Convection System

#### JDRP548WP – 48"

- Dual-fan MultiMode® true convection system (main oven)
- Two 20,000 BTU dual-stacked PowerBurners
- Electric griddle (1,320 watts)
- Three 15,000 BTU burners
- 5,000 BTU simmer burner (reduces to ultra-low 700 BTUs)
- 7-inch full color touch-anywhere LCD display
- Auto Convection Conversion

Overall Product Dimensions  
47<sup>7</sup>/<sub>8</sub>" w x 36<sup>3</sup>/<sub>4</sub>" h x 29<sup>1</sup>/<sub>4</sub>" d



### 36" Pro-Style® Dual-Fuel Range with Dual-Fan MultiMode® True Convection System

#### JDRP436WP – 36"

- Dual-fan MultiMode® true convection system
- Two 20,000 BTU dual-stacked PowerBurners
- Three 15,000 BTU burners
- 5,000 BTU simmer burner (reduces to ultra-low 700 BTUs)
- 7-inch full color touch-anywhere LCD display
- Auto Convection Conversion

Overall Product Dimensions  
35<sup>7</sup>/<sub>8</sub>" w x 36<sup>3</sup>/<sub>4</sub>" h x 29<sup>1</sup>/<sub>4</sub>" d



### 36" Pro-Style® Dual-Fuel Range with Griddle and Dual-Fan MultiMode® True Convection System

#### JDRP536WP – 36"

- Dual-fan MultiMode® true convection system
- 20,000 BTU dual-stacked PowerBurner
- Electric griddle (1,320 watts)
- Two 15,000 BTU burners
- 5,000 BTU simmer burner (reduces to ultra-low 700 BTUs)
- 7-inch full color touch-anywhere LCD display
- Auto Convection Conversion

Overall Product Dimensions  
35<sup>7</sup>/<sub>8</sub>" w x 36<sup>3</sup>/<sub>4</sub>" h x 29<sup>1</sup>/<sub>4</sub>" d



### 30" Pro-Style® Dual-Fuel Range with Dual-Fan MultiMode® True Convection System

#### JDRP430WP – 30"

- Dual-fan MultiMode® true convection system
- 20,000 BTU dual-stacked PowerBurner
- Two 15,000 BTU burners
- 5,000 BTU simmer burner (reduces to ultra-low 700 BTUs)
- 7-inch full color touch-anywhere LCD display
- Auto Convection Conversion

Overall Product Dimensions  
29<sup>7</sup>/<sub>8</sub>" w x 36<sup>3</sup>/<sub>4</sub>" h x 29<sup>1</sup>/<sub>4</sub>" d



### Industry's First Full Color LCD Display on a Range

Get the most out of all the oven's functions. The 7-inch full color LCD display's advanced technology allows you to touch anywhere on the display to control virtually all oven settings. Four key menus are precisely organized on each screen for unrivaled usability. Slider technology allows precision temperature adjustment with a swipe of the finger.



### Dual-Stacked PowerBurners

Each PowerBurner features two burners stacked in one location on the cooking surface with a maximum output of 20,000 BTUs (natural gas models) or 15,500 BTUs (LP models) providing the power for high-temperature cooking techniques such as wok cooking and flash frying.





48" Pro-Style® Gas Range  
with Griddle and Dual-Fan MultiMode®  
True Convection System

**JGRP548WP – 48"**

- Dual-fan MultiMode® true convection system (main oven)
- Two 20,000 BTU dual-stacked PowerBurners
- Electric griddle (1,320 watts)
- Three 15,000 BTU burners
- 5,000 BTU simmer burner (reduces to ultra-low 700 BTUs)
- 7-inch full color touch-anywhere LCD display
- Auto Convection Conversion

Overall Product Dimensions  
477/8" w x 383/4" h x 291/4" d



36" Pro-Style® Gas Range  
with Dual-Fan MultiMode®  
True Convection System

**JGRP436WP – 36"**

- Dual-fan MultiMode® true convection system
- Two 20,000 BTU dual-stacked PowerBurners
- Three 15,000 BTU burners
- 5,000 BTU simmer burner (reduces to ultra-low 700 BTUs)
- 7-inch full color touch-anywhere LCD display
- Auto Convection Conversion

Overall Product Dimensions  
357/8" w x 383/4" h x 291/4" d



36" Pro-Style® Gas Range  
with Griddle and Dual-Fan MultiMode®  
True Convection System

**JGRP536WP – 36"**

- Dual-fan MultiMode® true convection system
- 20,000 BTU dual-stacked PowerBurner
- Electric griddle (1,320 watts)
- Two 15,000 BTU burners
- 5,000 BTU simmer burner (reduces to ultra-low 700 BTUs)
- 7-inch full color touch-anywhere LCD display
- Auto Convection Conversion

Overall Product Dimensions  
357/8" w x 383/4" h x 291/4" d



30" Pro-Style® Gas Range  
with Dual-Fan MultiMode®  
True Convection System

**JGRP430WP – 30"**

- Dual-fan MultiMode® true convection system
- 20,000 BTU dual-stacked PowerBurner
- Two 15,000 BTU burners
- 5,000 BTU simmer burner (reduces to ultra-low 700 BTUs)
- 7-inch full color touch-anywhere LCD display
- Auto Convection Conversion

Overall Product Dimensions  
297/8" w x 383/4" h x 291/4" d





48" Pro-Style® LP Range  
with Griddle and Dual-Fan MultiMode®  
True Convection System

**JLRP548WP** – 48"

- Dual-fan MultiMode® true convection system (main oven)
- Two 14,000 BTU dual-stacked PowerBurners
- Electric griddle (1,320 watts)
- Three 11,000 BTU burners
- 3,000 BTU simmer burner
- 7-inch full color touch-anywhere LCD display
- Auto Convection Conversion

Overall Product Dimensions  
477/8" w x 383/4" h x 291/4" d



Overall Product Dimensions  
357/8" w x 383/4" h x 291/4" d

36" Pro-Style® LP Range  
with Dual-Fan MultiMode®  
True Convection System

**JLRP436WP** – 36"

- Dual-fan MultiMode® true convection system
- Two 14,000 BTU dual-stacked PowerBurners
- Three 11,000 BTU burners
- 3,000 BTU simmer burner
- 7-inch full color touch-anywhere LCD display
- Auto Convection Conversion



36" Pro-Style® LP Range  
with Griddle and Dual-Fan MultiMode®  
True Convection System

**JLRP536WP** – 36"

- Dual-fan MultiMode® true convection system
- 14,000 BTU dual-stacked PowerBurner
- Electric griddle (1,320 watts)
- Two 11,000 BTU burners
- 3,000 BTU simmer burner
- 7-inch full color touch-anywhere LCD display
- Auto Convection Conversion

Overall Product Dimensions  
357/8" w x 383/4" h x 291/4" d



30" Pro-Style® LP Range  
with Dual-Fan MultiMode®  
True Convection System

**JLRP430WP** – 30"

- Dual-fan MultiMode® true convection system
- 14,000 BTU dual-stacked PowerBurner
- Two 11,000 BTU burners
- 3,000 BTU simmer burner
- 7-inch full color touch-anywhere LCD display
- Auto Convection Conversion

Overall Product Dimensions  
297/8" w x 383/4" h x 291/4" d



## Pro-Style® Dual-Fuel Ranges



## 9" Stainless Steel Backsplash

**W10115777** – 48"**W10115776** – 36"**W10115773** – 30"

- Adds to commercial styling of dual-fuel Pro-Style® ranges
- Protects the wall behind the range



## Stainless Steel Backsplash with Two Shelves

**W10285449** – 48"**W10285448** – 36"**W10285447** – 30"

- Adds to commercial styling of Pro-Style® ranges
- Protects the wall behind the cooking surface
- Shelves can be used for ingredient placement or plate staging/warming



## Stainless Steel Griddle Cover

**W10160195**

- For use with select Pro-Style® ranges to cover the griddle when not in use



## Wok Ring

**W10216179**

- Fits securely on top of the grates to facilitate wok cooking
- Not for use with Wok AO142



## Extendable Roller Rack with Handle

**W10208155** – 48" (main oven)**W10212435** – 36"**W10208155** – 30"

- Fits inside the oven cavity of Pro-Style® ranges
- Features an easy-grip handle and ball-bearing rollers for smooth extension

	48"	36"	30"	
MODEL #	JDRP548W	JDRP536W	JDRP436W	JDRP430W
Overall Product Dimensions – w x h x d (in) <sup>A</sup>	47 <sup>7/8</sup> x 36 <sup>3/4</sup> x 29 <sup>1/4</sup>	35 <sup>7/8</sup> x 36 <sup>3/4</sup> x 29 <sup>1/4</sup>	35 <sup>7/8</sup> x 36 <sup>3/4</sup> x 29 <sup>1/4</sup>	29 <sup>7/8</sup> x 36 <sup>3/4</sup> x 29 <sup>1/4</sup>
Opening/Clearance Dimensions – w x d (in)	48 <sup>1/4</sup> x 24	36 <sup>1/4</sup> x 24	36 <sup>1/4</sup> x 24	30 <sup>1/4</sup> x 24
Approximate Shipping Weight (lb)	612	469	469	413
Volts/Amps Required	240/40	240/40	240/40	240/40
<b>COOKING SURFACE FEATURES</b>				
Sealed Burners	6	4	6	4
Natural Gas BTUs: High/Low				
Left Front	20,000/1,300	20,000/1,300	20,000/1,300	20,000/1,300
Left Rear	15,000/1,700	15,000/1,700	15,000/1,700	15,000/1,700
Center Front	15,000/1,700	—	15,000/1,700	—
Center Rear	5,000/700	—	5,000/700	—
Right Front	20,000/1,300	15,000/1,700	20,000/1,300	15,000/1,700
Right Rear	15,000/1,700	5,000/700	15,000/1,700	5,000/700
20,000 BTU Dual-Stacked PowerBurner(s)	■	■	■	■
Electric Griddle (1,320 Watts)	■	■	—	—
Convertible to LP <sup>B</sup>	■	■	■	■
<b>COOKING SURFACE CONTROL FEATURE</b>				
Electronic Ignition and Flame-Sensing™ Re-ignition	■	■	■	■
<b>OVEN FEATURES</b>				
Oven Capacity (cu. ft.)	4.1 Main Oven, 2.2 Secondary Oven	5.1	5.1	4.1
Element Wattages (Bake/Broil/Convection)	3,000/5,500/2,800 Main Oven, 2,000/2,650/1,600 Secondary Oven	3,000/6,500/ 2,800	3,000/6,500/ 2,800	3,000/5,500/ 2,800
Dual-Fan MultiMode® True Convection System	■	■	■	■
Hidden Bake Element(s)	■	■	■	■
8-Pass Broil Element	Main Oven	■	■	■
Broil Reflector	■	■	■	■
Closed-Door Broiling	■	■	■	■
Full and Center Broil Settings	Main Oven	■	■	■
CustomClean™ Self-Cleaning with Adjustable Levels and Automatic Lock	■	■	■	■
Heavy-Duty Racks	2 Each Oven	2	2	2
Extendable Roller Rack with Handle	Main Oven	■	■	■
Halogen Lights	3 Main Oven, 2 Secondary Oven	3	3	3
<b>OVEN CONTROL FEATURES</b>				
7-Inch Full Color Touch-Anywhere LCD Display	■	■	■	■
My Creations	■	■	■	■
Auto Convection Conversion	■	■	■	■
Proofing Option	■	■	■	■
Keep Warm™ Option	■	■	■	■
Temperature Probe	■	■	■	■
Control Lock	■	■	■	■
Sabbath Mode	■	■	■	■
<b>OPTIONAL ACCESSORIES</b>				
9" Stainless Steel Backsplash	W10115777	W10115776	W10115776	W10115773
Stainless Steel Backsplash with Two Shelves	W10285449	W10285448	W10285448	W10285447
Stainless Steel Griddle Cover	W10160195	W10160195	—	—
Wok Ring	W10216179	W10216179	W10216179	W10216179
Extendable Roller Rack with Handle	W10208155	W10212435	W10212435	W10208155
High Altitude Kit (LP)	W10237848	W10237848	W10237848	W10237848
High Altitude Kit (Natural Gas)	W10160841	W10160841	W10160841	W10160841
<b>EXTERIOR DESIGN FEATURES</b>				
Cast Iron Grates	■	■	■	■
Removable Toe Kick	■	■	■	■
Style Option (add letter to end of model number)				
Pro-Style® Stainless <sup>C</sup>	P	P	P	P

A. Depth includes handle, height includes backsplash.

B. LP kit included. Dual-fuel ranges are factory set for natural gas. Consult online Installation Instructions for LP BTU ratings.

C. Includes oversized stainless steel knobs and handle(s) with diamond etching.

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to installation instructions packaged with product *before* selecting cabinetry, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

## Pro-Style® Gas Ranges

	48"	36"	30"	
MODEL #	JGRP548W	JGRP536W	JGRP436W	JGRP430W
Overall Product Dimensions – w x h x d (in) <sup>A</sup>	47 <sup>7</sup> / <sub>8</sub> x 38 <sup>3</sup> / <sub>4</sub> x 29 <sup>1</sup> / <sub>4</sub>	35 <sup>7</sup> / <sub>8</sub> x 38 <sup>3</sup> / <sub>4</sub> x 29 <sup>1</sup> / <sub>4</sub>	35 <sup>7</sup> / <sub>8</sub> x 38 <sup>3</sup> / <sub>4</sub> x 29 <sup>1</sup> / <sub>4</sub>	29 <sup>7</sup> / <sub>8</sub> x 38 <sup>3</sup> / <sub>4</sub> x 29 <sup>1</sup> / <sub>4</sub>
Opening/Clearance Dimensions – w x d (in)	48 <sup>1</sup> / <sub>4</sub> x 24	36 <sup>1</sup> / <sub>4</sub> x 24	36 <sup>1</sup> / <sub>4</sub> x 24	30 <sup>1</sup> / <sub>4</sub> x 24
Approximate Shipping Weight (lb)	612	469	469	413
Volts/Amps Required	120/15	120/15	120/15	120/15
<b>COOKING SURFACE FEATURES</b>				
Sealed Burners	6	4	6	4
Natural Gas BTUs: High/Low				
Left Front	20,000/1,300	20,000/1,300	20,000/1,300	20,000/1,300
Left Rear	15,000/1,700	15,000/1,700	15,000/1,700	15,000/1,700
Center Front	15,000/1,700	—	15,000/1,700	—
Center Rear	5,000/700	—	5,000/700	—
Right Front	20,000/1,300	15,000/1,700	20,000/1,300	15,000/1,700
Right Rear	15,000/1,700	5,000/700	15,000/1,700	5,000/700
20,000 BTU Dual-Stacked PowerBurner(s)	■	■	■	■
Electric Griddle (1,320 Watts)	■	■	—	—
Convertible to LP <sup>B</sup>	■	■	■	■
<b>COOKING SURFACE CONTROL FEATURE</b>				
Electronic Ignition and Flame-Sensing™ Re-ignition	■	■	■	■
<b>OVEN FEATURES</b>				
Oven Capacity (cu. ft.)	4.1 Main Oven, 2.2 Secondary Oven	5.1	5.1	4.1
Burner BTUs (Bake/Broil)	17,000/11,000 Main Oven, 13,000/— Secondary Oven	17,000/11,000	17,000/11,000	17,000/11,000
Convection Element Wattage	1,200 Main	1,200	1,200	1,200
Dual-Fan MultiMode® True Convection System	Main Oven	■	■	■
Hidden Bake Burner(s)	■	■	■	■
Broil Reflector	Main Oven	■	■	■
Closed-Door Broiling	Main Oven	■	■	■
CustomClean™ Self-Cleaning with Adjustable Levels and Automatic Lock	■	■	■	■
Heavy-Duty Racks	2 Each Oven	2	2	2
Extendable Roller Rack with Handle	Main Oven	■	■	■
Halogen Lights	3 Main Oven, 2 Secondary Oven	3	3	3
<b>OVEN CONTROL FEATURES</b>				
7-Inch Full Color Touch-Anywhere LCD Display	■	■	■	■
My Creations	■	■	■	■
Auto Convection Conversion	■	■	■	■
Proofing Option	■	■	■	■
Keep Warm™ Option	■	■	■	■
Temperature Probe	■	■	■	■
Control Lock	■	■	■	■
Sabbath Mode	■	■	■	■
<b>OPTIONAL ACCESSORIES</b>				
Stainless Steel Backsplash with Two Shelves	W10285449	W10285448	W10285448	W10285447
Stainless Steel Griddle Cover	W10160195	W10160195	—	—
Wok Ring	W10216179	W10216179	W10216179	W10216179
Extendable Roller Rack with Handle	W10208155	W10212435	W10212435	W10208155
LP Conversion Kit	W10825584	W10825584	W10825584	W10825584
High Altitude Kit (LP)	W10237848	W10237848	W10237848	W10237848
High Altitude Kit (Natural Gas)	W10160841	W10160841	W10160841	W10160841
<b>EXTERIOR DESIGN FEATURES</b>				
Cast Iron Grates	■	■	■	■
3" Island Trim Backsplash	■	■	■	■
Removable Toe Kick	■	■	■	■
Style Option (add letter to end of model number) Pro-Style® Stainless <sup>C</sup>	P	P	P	P

A. Depth includes handle, height includes backsplash.

B. LP kit not included. Gas ranges are factory set for natural gas. Consult online Installation Instructions for LP BTU ratings.

C. Includes oversized stainless steel knobs and handle(s) with diamond etching.

## Pro-Style® LP Ranges

	48"	36"	30"	
MODEL #	JLRP548W	JLRP536W	JLRP436W	JLRP430W
Overall Product Dimensions – w x h x d (in) <sup>A</sup>	47 <sup>7</sup> / <sub>8</sub> x 38 <sup>3</sup> / <sub>4</sub> x 29 <sup>1</sup> / <sub>4</sub>	35 <sup>7</sup> / <sub>8</sub> x 38 <sup>3</sup> / <sub>4</sub> x 29 <sup>1</sup> / <sub>4</sub>	35 <sup>7</sup> / <sub>8</sub> x 38 <sup>3</sup> / <sub>4</sub> x 29 <sup>1</sup> / <sub>4</sub>	29 <sup>7</sup> / <sub>8</sub> x 38 <sup>3</sup> / <sub>4</sub> x 29 <sup>1</sup> / <sub>4</sub>
Opening/Clearance Dimensions – w x d (in)	48 <sup>1</sup> / <sub>4</sub> x 24	36 <sup>1</sup> / <sub>4</sub> x 24	36 <sup>1</sup> / <sub>4</sub> x 24	30 <sup>1</sup> / <sub>4</sub> x 24
Approximate Shipping Weight (lb)	612	469	469	413
Volts/Amps Required	120/15	120/15	120/15	120/15
<b>COOKING SURFACE FEATURES</b>				
Sealed Burners	6	4	6	4
LP Gas BTUs: High <sup>B</sup>				
Left Front	14,000	14,000	14,000	14,000
Left Rear	11,000	11,000	11,000	11,000
Center Front	11,000	—	11,000	—
Center Rear	3,000	—	3,000	—
Right Front	14,000	11,000	14,000	11,000
Right Rear	11,000	3,000	11,000	3,000
14,000 BTU Dual-Stacked PowerBurner(s)	■	■	■	■
Electric Griddle (1,320 Watts)	■	■	—	—
Convertible to Natural Gas <sup>C</sup>	■	■	■	■
<b>COOKING SURFACE CONTROL FEATURE</b>				
Electronic Ignition and Flame-Sensing™ Re-ignition	■	■	■	■
<b>OVEN FEATURES</b>				
Oven Capacity (cu. ft.)	4.1 Main Oven, 2.2 Secondary Oven	5.1	5.1	4.1
Burner BTUs (Bake/Broil)	17,000/11,000 Main Oven, 13,000/— Secondary Oven	17,000/11,000	17,000/11,000	17,000/11,000
Convection Element Wattage	1,200 Main	1,200	1,200	1,200
Dual-Fan MultiMode® True Convection System	Main Oven	■	■	■
Hidden Bake Burner(s)	■	■	■	■
5,500-Watt Reflective Broil Element	Main Oven	■	■	■
Closed-Door Broiling	Main Oven	■	■	■
CustomClean™ Self-Cleaning with Adjustable Levels and Automatic Lock	■	■	■	■
Heavy-Duty Racks	2 Each Oven	2	2	2
Extendable Roller Rack with Handle	Main Oven	■	■	■
Halogen Lights	3 Main Oven, 2 Secondary Oven	3	3	3
<b>OVEN CONTROL FEATURES</b>				
7-Inch Full Color Touch-Anywhere LCD Display	■	■	■	■
My Creations	■	■	■	■
Auto Convection Conversion	■	■	■	■
Proofing Option	■	■	■	■
Keep Warm™ Option	■	■	■	■
Temperature Probe	■	■	■	■
Control Lock	■	■	■	■
Sabbath Mode	■	■	■	■
<b>OPTIONAL ACCESSORIES</b>				
Stainless Steel Backsplash with Two Shelves	W10285449	W10285448	W10285448	W10285447
Stainless Steel Griddle Cover	W10160195	W10160195	—	—
Wok Ring	W10216179	W10216179	W10216179	W10216179
Extendable Roller Rack with Handle	W10208155	W10212435	W10212435	W10208155
Natural Gas Conversion Kit	W10821163	W10821163	W10821163	W10821163
High Altitude Kit (LP)	W10237848	W10237848	W10237848	W10237848
High Altitude Kit (Natural Gas)	W10160841	W10160841	W10160841	W10160841
<b>EXTERIOR DESIGN FEATURES</b>				
Cast Iron Grates	■	■	■	■
3" Island Trim Backsplash	■	■	■	■
Removable Toe Kick	■	■	■	■
Style Option (add letter to end of model number) Pro-Style® Stainless <sup>C</sup>	P	P	P	P

A. Depth includes handle, height includes backsplash.

B. Turn-down BTUs may vary.

C. Natural gas kit not included. LP gas ranges are factory set for LP. Consult online Installation Instructions for natural gas BTU ratings.

D. Includes oversized stainless steel knobs and handle(s) with diamond etching.

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to installation instructions packaged with product *before* selecting cabinetry, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to installation instructions packaged with product *before* selecting cabinetry, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.



## DOWNDRAFT RANGES

### A LEGACY OF FRESH AIR

Jenn-Air® downdraft ranges embrace the legacy of innovation that began with introducing downdraft ventilation to the world of kitchen design, defining and enabling the open-concept kitchen. 30-inch Jenn-Air® downdraft ranges are available in electric radiant or dual-fuel configurations with large-capacity true convection ovens that are perfect for entertaining.



**Downdraft ventilation** is ideal for design-conscious cooks who appreciate clean lines, unobstructed views and quiet kitchens, because it eliminates the need for overhead venting and expands possible kitchen layouts. And, because downdraft ventilation occurs right at the cooking source, capturing cooking vapors before they can escape, fewer CFM are required, meaning a quieter ventilation system – and a quieter kitchen.



Cooks can enjoy the benefits of downdraft ventilation in any kitchen, including those where traditional ductwork and ventilation is impractical, with an **innovative duct-free installation option**.

Each downdraft range is designed to be **full-depth**, fitting into a standard range opening as a replacement option for a freestanding range, even in an island or peninsula configuration. These ranges install without a back bridge countertop piece to provide an attractive, custom look.

Beyond striking design, downdraft ranges feature a large capacity **true convection oven**, which evenly distributes heat over multiple racks to produce superior results, like golden, flaky pastries.

No matter which fuel configuration is chosen, a Jenn-Air® downdraft range provides the desired performance and precision with versatile burners and elements that range from searing highs to simmering lows.



## 30" Dual-Fuel Downdraft Range

**JDS1750F – 30"****Style Options:****P** Pro-Style<sup>®</sup>  
Stainless**S** Euro-Style  
Stainless**B** Black  
Floating  
Glass

- Downdraft ventilation system with 2 speeds
- Convertible to duct-free ventilation
- Brass burners
- DuraFinish<sup>®</sup> Protection
- 17,000 BTU burner
- True Convection
- Telescoping glide rack
- Soft, auto-close oven door

Overall Product Dimensions  
29<sup>7</sup>/<sub>8</sub>" w x 36" h x 28<sup>5</sup>/<sub>16</sub>" d



## 30" Electric Radiant Downdraft Range

**JES1750F – 30"****Style Options:****S** Euro-Style  
Stainless**B** Black  
Floating  
Glass

- Downdraft ventilation system with 2 speeds
- Convertible to duct-free ventilation
- Dual zone element
- True Convection
- Telescoping glide rack
- Soft, auto-close oven door

Overall Product Dimensions  
29<sup>7</sup>/<sub>8</sub>" w x 36" h x 28<sup>5</sup>/<sub>16</sub>" d



## Convertible to Duct-Free Ventilation

The duct-free filter kit efficiently captures smoke, grease and moisture, resulting in a consistently fresh kitchen with an open, inviting design. See page 82 for more details.

DuraFinish<sup>®</sup> Protection

Jenn-Air<sup>®</sup> dual-fuel and gas full-depth ranges feature DuraFinish<sup>®</sup> Protection. This scratch- and stain-resistant protection keeps the cooktop looking like new by also resisting yellowing that high-heat cooking can cause over time.





### Duct-Free Filter Kit

**W10748976**

**W10768191**

**Style Option:**



**S** Stainless Steel



**B** Black Floating Glass

- For use with full-depth ranges JDS1750F and JES1750F
- Captures smoke, grease and moisture, and allows air to travel through the filter without a loss of air efficiency
- Includes a replacement indicator



### Trim Kit

**W10675028**

**W10675026**

**Style Option:**



**S** Stainless Steel



**B** Black Floating Glass


- For use with full-depth ranges JDS1750F and JES1750F



### Wok

**AO142**

- For use with gas burners and electric elements
- Nonstick surface
- Includes lid, steaming rack and rice paddles
- Not for use with Wok Ring W10216179

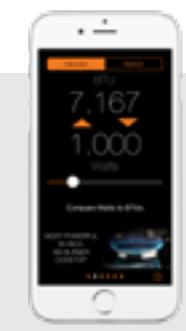

### BTU-Watt Comparison Tool

For customers who may be reluctant to sacrifice the power of gas for an electric or induction cooktop, Jenn-Air brand offers a free BTU-Watt comparison tool. This app, which is available for iOS devices, displays how the power of our induction and electric elements compares to gas burners.



### Downdraft Ranges

	<b>DUAL-FUEL</b>	<b>ELECTRIC RADIANT</b>
<b>MODEL #</b>	<b>JDS1750F</b>	<b>JES1750F</b>
Overall Product Dimensions – w x h x d (in) <sup>A</sup>	29 <sup>7/8</sup> x 36 x 28 <sup>5/16</sup>	29 <sup>7/8</sup> x 36 x 28 <sup>5/16</sup>
Opening/Clearance Dimensions – w x d (in)	30 x 25	30 x 25
Approximate Shipping Weight (lb)	240	240
Volts/Amps Required	240/40	240/40
<b>COOKING SURFACE FEATURES</b>		
Sealed Burners/Elements	4	4
Burner/Element Outputs (BTU, Watts)		
Left Front	17,000	3,000
Left Rear	5,000	1,300
Right Front	15,000	3,200
Right Rear	9,200	1,200
Simmer Burner	■	—
Electronic Ignition and Flame-Sensing™ Re-ignition	■	—
Continuous, Heavy-Duty Cast Iron Grates	■	—
DuraFinish® Protection	■	—
Aluminum Die-Cast Griddle (Included)	■	—
Dual Zone Element	—	■
Rapid Boil Element	—	■
Melt Element	—	■
Downdraft Ventilation System with 2 Speeds	350 CFM	350 CFM
Exterior Venting	5 <sup>8</sup> or 6 <sup>8</sup> Round or 3 <sup>1/4</sup> x 10 <sup>8</sup> Rectangular	5 <sup>8</sup> or 6 <sup>8</sup> Round or 3 <sup>1/4</sup> x 10 <sup>8</sup> Rectangular
Convertible to LP <sup>C</sup>	■	■
<b>OVEN FEATURES</b>		
Oven Capacity (cu. ft.)	6.4	6.4
Element Wattages (Bake/Broil/Convection)	3,600/4,000/3,200	3,600/4,000/3,200
True Convection	■	■
Telescoping Glide Rack	■	■
Offset Rack	■	■
Soft, Auto-Close Door	■	■
AquaLift® Self-Cleaning Technology	■	■
<b>OVEN CONTROL FEATURES</b>		
Glass-Touch Electronic Controls	■	■
Auto Convection Conversion	■	■
Keep Warm™ Option	■	■
Proofing Option	■	■
Sabbath Mode	■	■
<b>OPTIONAL ACCESSORIES</b>		
Duct-Free Filter Kit, Stainless	W10748976	W10748976
Duct-Free Kit, Black	W10768191	W10768191
Replacement HAPA Air Filter	W10800530	W10800530
Trim Kit, Stainless	W10675028	W10675028
Trim Kit, Black	W10675026	W10675026
Baking Stone	4378577	4378577
Roll-Out Full Extension Rack with Handle	W10570865	W10570865
Porcelain Broiler Pan and Grid	4396923	4396923
Wok	AO142	AO142
<b>EXTERIOR DESIGN FEATURES</b>		
Full-Depth Range	■	■
Style Options (add letter to end of model number)		
Pro-Style® Stainless <sup>D</sup>	P	—
Euro-Style Stainless with Euro-Style Barrel Knobs <sup>E</sup>	S	S
Black Floating Glass with Black Chrome Barrel Knobs <sup>F</sup>	B	B

A. Depth includes handle.

B. 5<sup>8</sup> diameter round ducting may be used if duct length is 10' or less.

C. LP kit included. Dual-fuel and gas ranges are factory set for natural gas.

Consult online Installation Instructions for LP BTU ratings.

D. Includes oversized stainless steel knobs and handle with diamond etching.

E. Includes slightly curved, stainless steel handle.

F. Includes slightly curved, color-coordinating handle.

## RANGES

### AN EXCEPTIONAL CHOICE

Offering a wide range of options, Jenn-Air® ranges support consumers' creativity and consistently provide exceptional results. At 30-inches wide, these full-depth ranges fit a standard range opening and are available in induction, electric, gas or dual-fuel configurations with a powerful true convection oven.



The **full-depth design** of Jenn-Air® ranges allows owners to achieve a built-in look without replacing existing cabinetry. These ranges are designed to fit into a standard range opening, which makes them easy to install without a back bridge countertop piece and provides a custom, polished look.

In addition to excellence in design, consumers will enjoy a **true convection oven** with a dedicated convection element, which works in combination with a fan to provide even heat distribution throughout the oven. An Auto Convection Conversion feature takes the guesswork out of adjusting the conventional cooking times and temperatures of your recipes.



As a bonus, all Jenn-Air® ranges feature a **baking drawer** that increases the total capacity of the range and allows cooks to prepare a variety of dishes at once. Consumers can also use it as a warming drawer for plates or to keep completed dishes at their proper serving temperature.

Whichever fuel-type is chosen, these ranges provide burners or elements with impressive power and precision to suit any preferred cooking style.

NOTE: Many of the Jenn-Air® appliances shown are photographed in custom cabinetry to showcase a flush installation.



## 30" Dual-Fuel Range

**JDS1450F** – 30"

## Style Options:

P Pro-Style<sup>®</sup>  
StainlessS Euro-Style  
Stainless

- DuraFinish<sup>®</sup> Protection
- Brass burners
- 19,000 BTU dual-stacked PowerBurner
- Baking drawer
- True convection
- Telescoping glide rack
- Soft, auto-close oven door

Overall Product Dimensions  
29<sup>7/8</sup>" w x 36" h x 28<sup>5/16</sup>" d


## 30" Induction Range

**JIS1450D** – 30"

## Style Options:

P Pro-Style<sup>®</sup>  
StainlessS Euro-Style  
Stainless

- Induction technology
- Baking drawer
- True convection
- Telescoping glide rack
- Soft, auto-close oven door
- Sensor Boil function
- Melt function

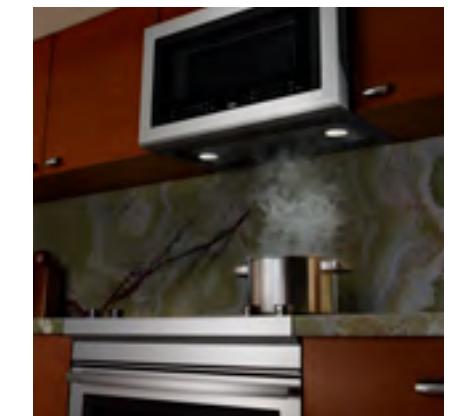Over-the-Range  
Ventilation and  
Microwave Cooking

Whisk smoke, steam and odors out of your kitchen efficiently with a Jenn-Air<sup>®</sup> over-the-range microwave oven. Our microwave ovens cook a variety of foods with outstanding results and feature extensive modes and controls. See page 94 for more details.



## 30" Gas Range

**JGS1450F** – 30"

## Style Options:

P Pro-Style<sup>®</sup>  
StainlessS Euro-Style  
StainlessB Black  
Floating  
Glass

- DuraFinish<sup>®</sup> Protection
- Brass burners
- 19,000 BTU dual-stacked PowerBurner
- Baking drawer
- True convection
- Telescoping glide rack
- Soft, auto-close oven door

Overall Product Dimensions  
29<sup>7/8</sup>" w x 36" h x 28<sup>5/16</sup>" d30" Electric Radiant  
Range**JES1450F** – 30"

## Style Options:

S Euro-Style  
StainlessB Black  
Floating  
Glass

- Triple-Choice<sup>™</sup> element
- Baking drawer
- True convection
- Telescoping glide rack
- Soft, auto-close oven door

Overall Product Dimensions  
29<sup>7/8</sup>" w x 36" h x 28<sup>5/16</sup>" d



### Trim Kit

**W10675028**

**Style Option:**



**S** Stainless Steel

**W10675026**

**Style Option:**



**B** Black Floating Glass

- For use with full-depth ranges JDS1450F\*, JGS1450F, JIS1450D\* and JES1450F

\*Stainless steel only



### Wok

**AO142**

- For use with gas burners and electric elements
- Nonstick surface
- Includes lid, steaming rack and rice paddles
- Not for use with Wok Ring W10216179



### The FIT System Limited Guarantee

The FIT System Limited Guarantee ensures that these ranges fit virtually any cabinet opening, providing up to \$100 to offset costs should cabinetry or countertops need to be altered.

### BTU-Watt Comparison Tool

For customers who may be reluctant to sacrifice the power of gas for an electric or induction cooktop, Jenn-Air brand offers a free BTU-Watt comparison tool. This app, which is available for iOS devices, displays how the power of our induction and electric elements compares to gas burners.



## Ranges

MODEL #	DUAL-FUEL JDS1450F	GAS JGS1450F	INDUCTION JIS1450D	ELECTRIC RADIANT JES1450F
Overall Product Dimensions – w x h x d (in) <sup>a</sup>	29 <sup>7/8</sup> x 36 x 28 <sup>5/16</sup>			
Opening/Clearance Dimensions – w x d (in)	30 x 25	30 x 25	30 x 25	30 x 25
Approximate Shipping Weight (lb)	235	235	245	235
Volts/Amps Required	240/40	120/15	240/40	240/40
<b>COOKING SURFACE FEATURES</b>				
Sealed Burners/Elements	5	5	4	5
Burner/Element Outputs (BTU, Watts)				
Left Front	19,000	19,000	2,500	3,000
Left Rear	5,000	5,000	2,500	1,300
Right Front	15,000	15,000	3,600	3,200
Right Rear	9,200	9,200	1,800	1,200
Center	8,000	8,000	—	100
Bridge Function	—	—	■	—
Dual-Stacked PowerBurner	■	■	—	—
Simmer Burner	■	■	—	—
Oval Burner	■	■	—	—
Continuous, Heavy-Duty Cast Iron Grates	■	■	—	—
DuraFinish® Protection	■	■	—	—
Aluminum Die-Cast Griddle (Included)	■	■	—	—
Triple-Choice™ Element	—	—	—	■
Rapid Boil Element	—	—	—	■
Melt Element	—	—	—	■
Warm Zone Element	—	—	—	■
Convertible to LP <sup>b</sup>	■	■	—	—
<b>COOKING SURFACE CONTROL FEATURES</b>				
Glass-Touch Electronic Controls	—	—	■	—
Electronic Ignition and Flame-Sensing™ Re-ignition	■	■	—	—
Pan Detection	—	—	■	—
Performance Boost	—	—	■	—
Keep Warm™ Function	—	—	■	—
Melt Function	—	—	■	—
Simmer Function	—	—	■	—
Sensor Boil	—	—	■	—
<b>OVEN FEATURES</b>				
Oven Capacity (cu. ft.)	6.4	5.8	6.4	6.4
Element Wattages (Bake/Broil/Convection)	3,600/4,000/3,200	900-W Convection	3,600/4,000/3,200	3,600/4,000/3,200
Burner BTUs (Bake/Broil)	—	18,000/13,000	—	—
True Convection	■	■	■	■
Baking Drawer Capacity (cu. ft.)	0.7	0.7	0.7	0.7
Baking Drawer Element Wattages	1,200	1,200	1,200	1,200
Telescoping Glide Rack	■	■	■	■
Offset Rack	■	■	■	■
Soft, Auto-Close Door	■	■	■	■
AquaLift® Self-Cleaning Technology	■	■	■	■
<b>OVEN CONTROL FEATURES</b>				
Glass-Touch Electronic Controls	■	■	■	■
Auto Convection Conversion	■	■	■	■
Keep Warm™ Option	■	■	■	■
Proofing Option	■	■	■	■
Sabbath Mode	■	■	■	■
<b>OPTIONAL ACCESSORIES</b>				
Trim Kit, Stainless	W10675028	W10675028	W10675028	W10675028
Trim Kit, Black	—	W10675026	—	W10675026
Baking Stone	4378577	4378577	4378577	4378577
Roll-Out Full Extension Rack with Handle	W10570865	W10570865	W10570865	W10570865
Porcelain Broiler Pan and Grid	4396923	4396923	4396923	4396923
Wok	AO142	AO142	AO142	AO142
<b>EXTERIOR DESIGN FEATURES</b>				
Full-Depth Range	■	■	■	■
Style Options (add letter to end of model number)				
Pro-Style® Stainless <sup>c</sup>	P	P	P	—
Euro-Style Stainless with Euro-Style Barrel Knobs <sup>d</sup>	S	S	S	S
Black Floating Glass with Black Chrome Barrel Knobs <sup>e</sup>	—	B	—	B
<small>A. Depth includes handle. B. LP kit included. Dual-fuel ranges are factory set for natural gas. Consult online Installation Instructions for LP BTU ratings.</small>				
<small>C. Includes oversized stainless steel knobs and handle with diamond etching. D. Includes slightly curved, stainless steel handle. E. Includes slightly curved, color-coordinating handle.</small>				

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to installation instructions packaged with product *before* selecting cabinetry, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

## MICROWAVE OVENS VERSATILITY AND PERFORMANCE

Jenn-Air® built-in microwave ovens complement a suite of built-in appliances and are available in widths and configurations to suit any desired layout. These include traditional built-in and sleek drawer designs, both of which can be installed in the wall or in an island as an under-counter solution. Where more traditional styles are desired, countertop and over-the-range models are available.

As an under-counter solution, a **seamless flat-front drawer design** conserves valuable counter space and is ideal for open-concept kitchen designs, where a clean look is desirable. This microwave oven smoothly opens at the touch of a button.



Select built-in models feature a **Speed-Cook mode**, which cooks up to three times faster than traditional methods and includes 57 pre-set food settings for casseroles, fish, poultry, roasts and more. And, all Jenn-Air® built-in and drawer models include a **Keep Warm™ option** that keeps finished menu items warm until they're ready to be served.

All Jenn-Air® built-in microwave ovens, with or without a handle to match other Jenn-Air® style suites, can install flush with surrounding cabinetry.

For homeowners who prefer a countertop or over-the-range model, our countertop models can be installed into the wall with a trim kit for a more integrated appearance. And, over-the-range models feature a **perimetric extraction** ventilation system, which provides exceptional performance without sacrificing quiet operation.



30"/27" Built-In Microwave Oven  
with Speed-Cook

**JMC2430D** – 30"

**Style Options:**



**P** Pro-Style®  
Stainless



**S** Euro-Style®  
Stainless



**B** Black  
Floating  
Glass

**JMC2427D** – 27"

**Style Option:**



**S** Euro-Style®  
Stainless

Overall Product Dimensions

30-inch – 29 $\frac{3}{4}$ " w x 19 $\frac{7}{8}$ " h x 24 $\frac{3}{4}$ " d

27-inch – 26 $\frac{3}{4}$ " w x 19 $\frac{7}{8}$ " h x 24 $\frac{11}{16}$ " d

- 4.3-inch full color menu-driven LCD display
- Convection & microwave combination cooking
- Sensor cooking
- Speed-Cook
- Keep Warm™ option
- Flush-to-cabinet design (requires trim kit, not included)



25" Built-In/Countertop Microwave Oven  
with Convection

**JMC3415E** – 22"

**Style Option:**



**S** Stainless  
Steel

- Convection & microwave combination cooking
- Sensor cooking
- 2-stage memory programming
- Built-in installation option (requires trim kit, not included)



24" Under Counter Microwave Oven  
with Drawer Design

**JMD2124W** – 24"

**Style Option:**



**S** Euro-Style®  
Stainless

Overall Product Dimensions

23 $\frac{3}{4}$ " w x 15 $\frac{3}{8}$ " h x 24 $\frac{1}{2}$ " d

- Drawer design
- Sensor cooking
- Keep Warm™ option
- Power touch open/close
- 4-stage memory programming



22" Built-In/Countertop Microwave Oven

**JMC1116A** – 22"

**Style Options:**



**S** Stainless  
Steel



**B** Black

- Sensor cooking
- 2-stage memory programming
- Built-in installation option (requires trim kit, not included)



Seamless Flat Front Design

Model JMD2124W features a stylish drawer design with a flat front that creates a sleek, seamless look and opens with the touch of a button, rather than a handle.



Built-In Installation Option

The addition of a 30- or 27-inch trim kit (not included) allows built-in installation of Jenn-Air® countertop microwave ovens.



30" Over-the-Range Microwave Oven  
with Convection


**JMV9196C** – 30"

**Style Options:**

**S** Stainless Steel   **B** Black

- Convection & microwave combination cooking
- Sensor cooking
- 53 menu programs
- 1,600-watt convection element
- Perimetric venting
- 6-level, built-in exterior exhaust system

Overall Product Dimensions  
29<sup>7</sup>/<sub>8</sub>" w x 17<sup>9</sup>/<sub>16</sub>" h x 16<sup>9</sup>/<sub>16</sub>-17<sup>5</sup>/<sub>16</sub>" d

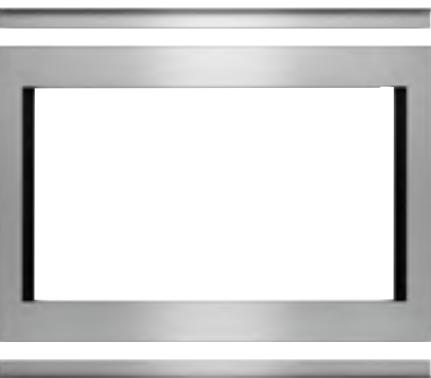

Microwave Oven Trim Kit

**Non-Flush**      **Flush**

**MKC3150E** – 30"      **MKC4150E** – 30"

**MKC3157E** – 27"      **MKC4157E** – 27"

**Style Option:**

**S** Stainless Steel

- For use with built-in/countertop microwave oven JMC3415E
- Allows for installation over a single wall oven
- Allows the microwave oven to achieve a flush-to-cabinet look for in-wall installations\*

\* Models MKC4150E and MKC4157E



30" Over-the-Range Microwave Oven


**JMV8208C** – 30"

**Style Options:**

**S** Stainless Steel   **B** Black

- Sensor cooking
- 35 menu programs
- Perimetric venting
- 6-level, built-in exterior exhaust system

Overall Product Dimensions  
29<sup>7</sup>/<sub>8</sub>" w x 17<sup>9</sup>/<sub>16</sub>" h x 16<sup>9</sup>/<sub>16</sub>-17<sup>5</sup>/<sub>16</sub>" d

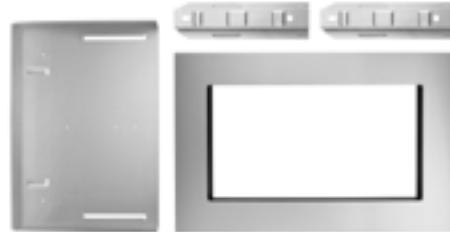

Microwave Oven Trim Kit

**MK2160A** – 30"

**MK2167A** – 27"

**Style Options:**

**S** Stainless Steel   **B** Black

- For use with built-in/countertop microwave oven JMC1116A
- For converting countertop microwave oven into a built-in oven
- Allows for installation over a single wall oven



Microwave Oven Filler Kit

**8171339**      **8171337**

**Style Option:**      **Style Option:**

**S** Stainless Steel   **B** Black

- For use with over-the-range microwave ovens
- Use when installing in a 36" wide opening
- Includes two panels



## Built-In Microwave Ovens

	30"	27"	24" DRAWER	BUILT-IN/COUNTERTOP	
MODEL #	JMC2430D	JMC2427D	JMD2124W	JMC3415E	JMC1116A
Overall Product Dimensions – w x h x d (in) <sup>A</sup>	29 <sup>3</sup> / <sub>4</sub> x 19 <sup>1</sup> / <sub>2</sub> x 24 <sup>1</sup> / <sub>2</sub>	26 <sup>3</sup> / <sub>4</sub> x 19 <sup>7</sup> / <sub>8</sub> x 24 <sup>11</sup> / <sub>16</sub>	23 <sup>3</sup> / <sub>4</sub> x 15 <sup>3</sup> / <sub>8</sub> x 24 <sup>1</sup> / <sub>2</sub>	24 <sup>5</sup> / <sub>8</sub> x 14 <sup>1</sup> / <sub>4</sub> x 19 <sup>1</sup> / <sub>8</sub>	21 <sup>3</sup> / <sub>4</sub> x 13 x 17 <sup>3</sup> / <sub>4</sub>
Opening/Clearance Dimensions (Traditional Installations) – w x h x d (in)	28 <sup>1</sup> / <sub>2 x 17<sup>3</sup>/<sub>8</sub>-17<sup>3</sup>/<sub>4</sub> x 21<sup>7</sup>/<sub>8</sub></sub>	25 <sup>1</sup> / <sub>2 x 17<sup>3</sup>/<sub>8</sub>-17<sup>3</sup>/<sub>4</sub> x 21<sup>7</sup>/<sub>8</sub></sub>	22 <sup>1</sup> / <sub>8 x 14<sup>7</sup>/<sub>8</sub> x 23<sup>1</sup>/<sub>2</sub><sup>B</sup></sub>	29 <sup>1</sup> / <sub>4</sub> -29 <sup>1</sup> / <sub>2 x 18<sup>1</sup>/<sub>8</sub>-19<sup>1</sup>/<sub>16</sub> x 21<sup>1</sup>/<sub>2</sub> (30") 26<sup>1</sup>/<sub>4</sub>-26<sup>1</sup>/<sub>2</sub> x 18<sup>1</sup>/<sub>8</sub>-19<sup>1</sup>/<sub>16</sub> x 21<sup>1</sup>/<sub>2</sub> (27")</sub>	23 <sup>1</sup> / <sub>8</sub> x 17-17 <sup>1</sup> / <sub>8</sub> x 22 <sup>3</sup> / <sub>4</sub>
Opening/Clearance Dimensions (Flush Installations) – w x h x d (in)	28 <sup>7</sup> / <sub>8 x 17<sup>5</sup>/<sub>8</sub> x 23<sup>1</sup>/<sub>4</sub></sub>	25 <sup>7</sup> / <sub>8 x 17<sup>5</sup>/<sub>8</sub> x 23<sup>1</sup>/<sub>4</sub></sub>	—	30-30 <sup>1</sup> / <sub>4</sub> x 22 <sup>9</sup> / <sub>16</sub> -22 <sup>5</sup> / <sub>8</sub> x 23 (30") 27-27 <sup>1</sup> / <sub>4</sub> x 22 <sup>9</sup> / <sub>16</sub> -22 <sup>5</sup> / <sub>8</sub> x 23 (27")	—
Approximate Shipping Weight (lb)	101	90	103	68	36
Volts/Amps Required	240/20	240/20	120/15	120/15	120/15
<b>MICROWAVE OVEN FEATURES</b>					
Oven Capacity (cu. ft.)	1.4	1.4	1.0	1.5	1.6
Power Output (watts)	900	900	950	900	1,200
Power Levels	10	10	10	10	10
Element Wattages (Convection/Grill)	1,200/1,600	1,200/1,600	—	1,400/—	—
Stainless Steel Interior	■	■	—	■	—
Glass Turntable	Stoppable	Stoppable	—	■	■
Speed-Cook	■	■	—	—	—
Convection & Microwave Combination Cooking	■	■	—	■	—
Auto Sensor Microwave Cooking	■	■	■	■	■
Auto Sensor Steam Cook	■	■	—	—	—
Auto Sensor Reheat	■	■	■	■	■
Non-Sensored Cooking	■	■	■	■	■
Keep Warm™ Option	■	■	■	—	—
Auto Defrost	■	■	■	■	■
Crisp Pan	■	■	—	—	—
Soften/Melt Cycle	■	■	—	—	—
Convection Rack/Grill Rack	■	■	—	—	—
Broiling Rack/Baking Rack	—	—	—	■/■	—
<b>CONTROL FEATURES</b>					
Glass-Touch Electronic Controls	Glass-Touch with Menu-Driven LCD Display	Glass-Touch with Menu-Driven LCD Display	Menu-Driven LCD Display	■	■
Auto Convection Conversion	■	■	—	—	—
Memory Programming	3-Stage	3-Stage	4-Stage	2-Stage	2-Stage
My Creations	■	■	—	—	—
Control Lock	■	■	■	■	■
<b>OPTIONAL ACCESSORIES</b>					
Stainless Steel Flush Install Trim Kit	W10801486	W10801485	—	—	—
Black Flush Install Trim Kit	W10801487	—	—	—	—
30" Trim Kit (S = Stainless Steel, B = Black)	—	—	—	MKC3150ES (Traditional Install) MKC4150ES (Flush Install)	MK2160AS/B
27" Trim Kit (S = Stainless Steel, B = Black)	—	—	—	MKC3157ES (Traditional Install) MKC4157ES (Flush Install)	MK2167AS/B
<b>EXTERIOR DESIGN FEATURES</b>					
Seamless Flat Front Design	■	■	■	■	■
Flush-to-Cabinet Design	■	■	■	■	—
Door	Drop-Down	Drop-Down	Pull-Out	Side-Swing	Side-Swing
In-Wall Installation <sup>C</sup>	■	■	■	Trim Kit Required	Trim Kit Required
Under Counter Installation	■	■	■	—	—
Style Options (add letter to end of model number)					
Pro-Style® Stainless <sup>D</sup>	P	—	—	—	—
Euro-Style Stainless <sup>E</sup>	S	S	S	—	—
Black Floating Glass <sup>F</sup>	B	—	—	—	—
Stainless Steel	—	—	—	S	S
Black	—	—	—	—	B

A. Depth includes handle.

B. With flush receptacle. 28" with non-flush receptacle.

C. Not to be installed above a gas wall oven.

D. Includes stainless steel handle with diamond etching.

E. Includes slightly curved, stainless steel handle (except drawer model JMD2124W, JMC3415E and JMC1116A).

F. Includes slightly curved, black handle.

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to installation instructions packaged with product *before* selecting cabinetry, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

## Over-the-Range Microwave Ovens

	30"	JMV9196C	JMV8208C
MODEL #			
Overall Product Dimensions – w x h x d (min.-max.) (in) <sup>A</sup>	29 <sup>7</sup> / <sub>8</sub> x 17 <sup>9</sup> / <sub>16</sub> x 16 <sup>9</sup> / <sub>16</sub> -17 <sup>5</sup> / <sub>16</sub>	29 <sup>7</sup> / <sub>8</sub> x 17 <sup>9</sup> / <sub>16</sub> x 16 <sup>9</sup> / <sub>16</sub> -17 <sup>5</sup> / <sub>16</sub>	29 <sup>7</sup> / <sub>8</sub> x 17 <sup>9</sup> / <sub>16</sub> x 16 <sup>9</sup> / <sub>16</sub> -17 <sup>5</sup> / <sub>16</sub>
Opening/Clearance Dimensions – w x d (in)	30 x 12-14	30 x 12-14	30 x 12-14
Approximate Shipping Weight (lb)	77	77	77
Volts/Amps Required	120/15-20	120/15-20	120/15-20
<b>MICROWAVE OVEN FEATURES</b>			
Oven Capacity (cu. ft.)	1.9	2.0	2.0
Power Output (watts)	900	1,000	1,000
Power Levels	10	10	10
Convection Element Wattage	1,600	—	—
Blower CFM Rating	400	400	400
Exhaust Fan Speeds	6	6	6
Cooling Fan for Microwave Mode	■	■	■
Perimetric Venting	■	■	■
Exterior Venting or Recirculating	■	■	■
Stainless Steel Interior	■	■	■
Halogen Theater Lighting	■	—	—
Glass Turntable	■	■	■
Convection & Microwave Combination Cooking	■	—	—
Auto Sensor Microwave Cooking	■	■	■
Auto Sensor Reheat Option	—	—	■
Auto Non-Sensored Microwave Cooking	—	—	Frozen Entree
Warm Hold Function	■	■	■
Auto Defrost	4 Defrost Menu Programs	4 Defrost Menu Programs	4 Defrost Menu Programs
Soft/Melt	■	■	■
Removable Cooking Rack	■	—	—
Convection Rack Accessory	■	—	—
Charcoal Filter	■	■	■
Grease Filter(s)	■	■	■
Filter Status Indicator	■	■	■
<b>CONTROL FEATURES</b>			
Glass-Touch Electronic Controls	■	■	■
Memory Programming	4-Stage	3-Stage	3-Stage
My Creations	■	—	—
Kitchen Timer	■	■	■
One-Touch Start	■	■	■
Menu Programs	53 (8 categories)	35 (6 categories)	35 (6 categories)
More/Less Time Adjustment	■	■	■
Add 1 Minute Touch Pad	■	■	■
Auto Sense Option	6-Speeds	6-Speeds	6-Speeds
Timer Function	■	■	■
Audible Chimes	■	■	■
Control Lock	■	■	■
<b>OPTIONAL ACCESSORIES</b>			
Replacement Charcoal Filter	8206230	8206230	8206230
Replacement Grease Filter	W10208631	W10208631	W10208631
Filler Kit (Stainless)	8171339	8171339	8171339
Filler Kit (Black)	8171337	8171337	8171337
Heat Deflector for Black Over-the-Range Microwave Oven <sup>B</sup>	W10737014	W10737014	W10737014
<b>EXTERIOR DESIGN FEATURES</b>			
Side-Swing Door	■	■	■
One-Piece Door Front	■	■	■
Pocket Handle	■	■	■
Halogen Task Lighting	■	■	■
Style Options (add letter to end of model number)			
Stainless Steel Exterior Finish	S	S	S
Black Exterior Finish	B	B	B
A. Depth with door +/- 3/8 inches.			
B. For use when pairing with gas or dual-fuel ranges.			
<b>IMPORTANT:</b> Dimensional specifications are provided for planning purposes only. <b>Do not make any cutouts based on this information.</b> Refer to installation instructions packaged with product <i>before</i> selecting cabinetry, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.			

## WARMING DRAWERS UNMATCHED VERSATILITY

Jenn-Air® warming drawers deliver incredible flexibility in the kitchen or any room of the home – even outdoors. Available in 30- and 27-inch widths and in Pro-Style® Stainless, Euro-Style Stainless or Custom Overlay designs, each warming drawer is designed to complement other Jenn-Air® cooking products. While most warming drawers are installed below a wall oven, they may be installed virtually anywhere in the kitchen, including under a cooktop or as a stand-alone in an island.

Proper temperature and humidity control are vital aspects of keeping prepared entrées and sides ready to serve while coordinating other aspects of a meal. A Jenn-Air® warming drawer's **two humidity settings** allow precise control of the drawer's environment. Set the drawer to "Moist" to keep roasts tender, or turn it to "Dry" to keep pie crusts flaky and crispy.



In addition to flexible humidity settings, a Jenn-Air® warming drawer is a versatile appliance that goes beyond warming tableware and food. A **Slow Roast function** allows use of the drawer as an auxiliary oven to slow cook beef, pork and poultry over a long period of time, producing moist and tender results. And, those who



enjoy baking bread will appreciate the warming drawer's temperature-controlled environment for **proofing bread**, where it can rise at a low, optimal temperature.



### 30"/27" Warming Drawer

**JWD3030E** – 30"

#### Style Options:



P Pro-Style<sup>®</sup>  
Stainless



S Euro-Style  
Stainless



X Custom  
Overlay  
Design

Overall Product Dimensions  
30-inch – 29 $\frac{3}{4}$ " w x 10 $\frac{1}{4}$ " h x 26 $\frac{1}{4}$ " d  
27-inch – 26 $\frac{3}{4}$ " w x 10 $\frac{1}{4}$ " h x 26 $\frac{1}{4}$ " d

**JWD3027E** – 27"

#### Style Options:



S Euro-Style  
Stainless



X Custom  
Overlay  
Design

- Slow Roast function
- Humidity slide control
- Bread Proofing function
- Full-extension drawer with roller glides
- Approved for indoor/outdoor use

#### Custom Overlay Design

Requires custom panel and handle, not included.

Custom panel and handle must be ordered separately from a cabinet maker or other manufacturer.

## Warming Drawers

#### MODEL #

Overall Product Dimensions – w x h x d (in)<sup>a</sup>

**JWD3030E**

**JWD3027E**

29 $\frac{3}{4}$  x 10 $\frac{1}{4}$  x 26 $\frac{1}{4}$

26 $\frac{3}{4}$  x 10 $\frac{1}{4}$  x 26 $\frac{1}{4}$

Opening/Clearance Dimensions – w x h x d (in)

28 $\frac{1}{2}$  x 9 $\frac{1}{8}$  x 24

25 $\frac{1}{2}$  x 9 $\frac{1}{8}$  x 24

Approximate Shipping Weight (lb)

71

71

Volts/Amps Required

120/15

120/15

#### DRAWER FEATURES

Drawer Capacity (cu. ft.)

1.5

1.3

Heating Element Wattage

600

600

2-Position Racks

■

■

Full-Extension Drawer with Roller Glides

■

■

Approved for Indoor/Outdoor Use

■

■

#### CONTROL FEATURES

Slow Roast Function

■

■

Bread Proofing Function

■

■

Concealed Controls

■

■

Humidity Slide Control

■

■

Sensor Temperature Control

■

■

Power "ON" Indicator Light

■

■

#### OPTIONAL ACCESSORIES

1/2 Pan

W10242695A

W10242695A

1/3 Pan

W10242694A

W10242694A

#### EXTERIOR DESIGN FEATURES

Style Options (add letter to end of model number)

Pro-Style<sup>®</sup> Stainless<sup>b</sup>

P

—

Euro-Style Stainless<sup>c</sup>

S

S

Custom Overlay Design<sup>d</sup>

X

X

A. Depth includes handle.

B. Includes stainless steel handle with diamond etching.

C. Includes slightly curved, stainless steel handle.

D. Requires custom panel and handle, not included.



### Warming Drawer Pan Accessory

**W10242695A** – 1/2 Pan

**W10242694A** – 1/3 Pan (Pictured)

- Stainless steel pan with lid



### Combine Your Warming Drawer with a Wall Oven

A warming drawer is the perfect complement to a Jenn-Air<sup>®</sup> wall oven. Keep completed dishes at the ideal temperature and texture until you're ready to serve. Specialized Bread Proofing and Slow Roast functions add flexibility. See pages 26-30 for wall oven options.

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to installation instructions packaged with product *before* selecting cabinetry, making cutouts or beginning installation. All Jenn-Air<sup>®</sup> appliances are appropriately UL, CUL or CSA approved.

## VENTILATION

### CLEAR THE AIR.

Jenn-Air brand has long been known as an industry expert in the science of air movement, beginning with introducing downdraft ventilation to kitchen design and enabling the open-concept kitchen. Our ventilation systems target smoke, steam, heat and odors generated while cooking and draw them out of the kitchen quickly and quietly. Choose from downdraft or updraft models in widths and styles to match powerful cooktops and ranges.



All Jenn-Air® ventilation solutions complement the performance and aesthetic of our cooktops and ranges. Our **Pro-Style™ hoods** feature a commercial look with heavy-duty, stainless steel styling. Low-profile island- and wall-mount hoods are modern and understated. **Pyramid-style** island- and wall-mount hoods enhance a traditional design with elegantly sloping angles, smooth facets and brushed stainless steel.



**Perimetric designs**, available on both low-profile and pyramid-style models, enhance performance while maintaining a quiet kitchen, making them ideal for even the most powerful ranges and cooktops.

In kitchens where overhead ventilation is impractical or undesirable, our signature downdraft ventilation systems offer duct-free installation to accommodate any kitchen layout, including those with cooktops situated in an island or peninsula. These systems, including the **Accolade® downdraft ventilation system**, rise from the countertop at the push of a button and retract back to create open sight lines throughout the kitchen.



### 36" Accolade® Downdraft Ventilation System

#### **JXD7836BS** – 36"

- 1,200 CFM high-performance in-line blower required (sold separately)
- 4 fan speed settings
- 19-inch rise
- 3 exhaust positions
- Curved retractable downdraft design

Overall Product Dimensions  
40<sup>3</sup>/<sub>4</sub>" w x 18<sup>1</sup>/<sub>2</sub>" h x 10<sup>3</sup>/<sub>8</sub>" d



### 48" Pro-Style™ Wall-Mount Hood

#### **JXW9048WP** – 48"

- 1,200 CFM dual high-performance blowers
- 4 fan speed settings
- 2 food warming lamps (bulbs included)
- 3 halogen lights (bulbs included)

Overall Product Dimensions  
48" w x 19<sup>3</sup>/<sub>8</sub>" h x 25" d



### 36"/30" Euro-Style Telescoping Downdraft Ventilation

#### **JXD7036YS** – 36"

#### **JXD7030YS** – 30"

- 600 CFM internally mounted power system
- 4-speed downdraft fan
- 14-inch rise
- Reversible motor box

Overall Product Dimensions  
36-inch – 36" w x 13<sup>1</sup>/<sub>2</sub>" h x 2" d  
30-inch – 30" w x 13<sup>1</sup>/<sub>2</sub>" h x 2" d



### 36"/30" Pro-Style™ Wall-Mount Hood

#### **JXW9036WP** – 36"

#### **JXW9030WP** – 30"

- 600 CFM high-performance blower
- 4 fan speed settings
- 2 food warming lamps (bulbs included)
- 2 halogen lights (bulbs included)

Overall Product Dimensions  
36-inch – 36" w x 19<sup>3</sup>/<sub>8</sub>" h x 25" d  
30-inch – 30" w x 19<sup>3</sup>/<sub>8</sub>" h x 25" d



### 4" Modular Downdraft Vent

#### **JVD0303G** – 4"

#### Style Option:



- 350 CFM blower capacity
- Convertible to duct-free ventilation with duct-free filter kit (purchase separately)
- Low-profile design with true flush installation option
- Available Q4 2017

Overall Product Dimensions  
4" w x 21" d




### 36"/30" Pro-Style™ Low Profile Under Cabinet Hood

#### **JXU9136WP** – 36"

#### **JXU9130WP** – 30"

- 600 CFM high-performance blower
- 4 fan speed settings
- 2 halogen lights (bulbs included)

Overall Product Dimensions  
36-inch – 36" w x 10<sup>1</sup>/<sub>2</sub>" h x 23" d  
30-inch – 30" w x 10<sup>1</sup>/<sub>2</sub>" h x 23" d

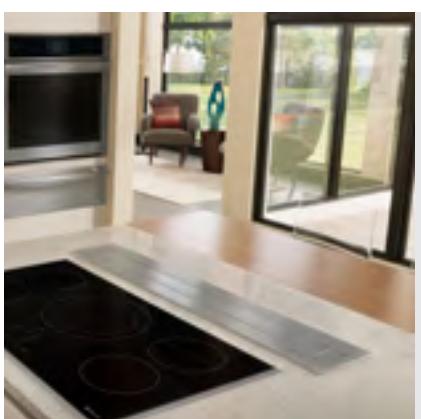

### Open Sight Lines

When they're not being used, downdraft ventilation hoods elegantly retract back into the countertop to maintain open sight lines throughout your kitchen and adjoining living spaces.



### Food Warming Lamps

These lamps are available on select Pro-Style™ Stainless ventilation hoods and can be used in combination with the Pro-Style® Stainless backsplash and backsplash with two shelves. The lamps help keep cooked food warm before service when it's placed on the shelf.





### 48"/36" Custom Hood Liner

**UXL6048YSS** – 48"

**UXL6036YSS** – 36"

- For use with custom applications
- Uses 600 or 1,200 CFM internal or 1,200 CFM in-line blower motor (sold separately)
- Compatible with cooking surfaces up to 105K BTUs
- 3 fan speed settings
- 4 halogen lights with night light setting (bulbs included)
- Dishwasher-safe stainless steel baffle filters

Overall Product Dimensions  
48-Inch – 47<sup>7</sup>/<sub>8</sub>" w x 11<sup>1</sup>/<sub>2</sub>" h x 22" d  
36-Inch – 35<sup>7</sup>/<sub>8</sub>" w x 11<sup>1</sup>/<sub>2</sub>" h x 22" d



### 36" Low Profile Island-Mount Canopy Hood

**JXI8936DS** – 36"

- Perimetric extraction
- 600 CFM high-performance blower
- Sound silencing system
- Manual 3-speed selection
- Boost function
- LED task lighting

Overall Product Dimensions  
36" w x 29<sup>5</sup>/<sub>8</sub>-46<sup>7</sup>/<sub>8</sub>" h x 24" d



### 36" Custom Hood Liner

**JXL6536CSS** – 36"

- For use with custom applications
- Uses 600 or 1,200 CFM internal or 1,200 CFM in-line blower motor (sold separately)
- Compatible with cooking surfaces up to 105K BTUs (with 1,200 CFM blower)
- 3 fan speed settings
- 4 halogen lights with night light setting (bulbs included)
- 2 dishwasher-safe stainless steel baffle filters

Overall Product Dimensions  
35<sup>7</sup>/<sub>8</sub>" w x 11<sup>1</sup>/<sub>2</sub>" h x 22" d



### 36" Low Profile Wall-Mount Canopy Hood

**JXW8936DS** – 36"

- Perimetric extraction
- 600 CFM high-performance blower
- Sound silencing system
- Manual 3-speed selection
- Boost function
- LED task lighting

Overall Product Dimensions  
36" w x 33<sup>1</sup>/<sub>8</sub>-54<sup>3</sup>/<sub>4</sub>" h x 21<sup>9</sup>/<sub>16</sub>" d




### 30" Custom Hood Liner

**UXL5430BSS** – 30"

- For use with custom applications
- 400 CFM internal blower
- Compatible with cooking surfaces less than 65K BTUs
- 3 fan speed settings
- 2 halogen task lights
- Dishwasher-safe metal filters

Overall Product Dimensions  
30" w x 11<sup>7</sup>/<sub>8</sub>" h x 13<sup>5</sup>/<sub>8</sub>" d

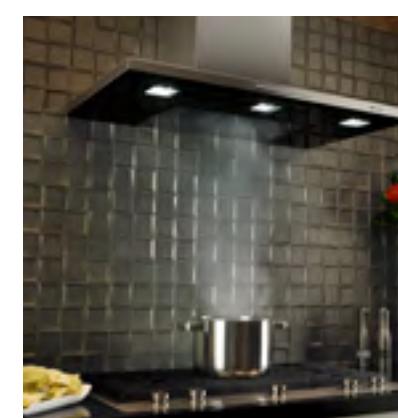

### Perimetric Extraction

This sophisticated design is not only attractive, it is the secret behind the ventilation system's exceptional performance and quiet operation. Cooking vapors are efficiently captured by drawing air through thin slots, speeding the air and improving ventilation performance.



### 42"/36" Low Profile Island-Mount Canopy Hood

**JXI8742DS** – 42"

**JXI8736DS** – 36"

- 600 CFM high-performance blower
- Sound silencing system
- Manual 3-speed selection
- Boost function
- LED task lighting

Overall Product Dimensions  
42-inch – 42" w x 30<sup>3/8</sup>-47<sup>5/8</sup>" h x 24" d  
36-inch – 36" w x 30<sup>3/8</sup>-47<sup>5/8</sup>" h x 24" d



### 36" Pyramid-Style Island-Mount Canopy Hood

**JXI8536DS** – 36"

- Perimetric extraction
- 600 CFM high-performance blower
- Manual 3-speed selection
- Boost function
- LED task lighting
- Upward facing LED ambient lighting

Overall Product Dimensions  
36" w x 32<sup>1/2</sup>-52<sup>9/16</sup>" h x 27" d



### 36" Low Profile Wall-Mount Canopy Hood

**JXW8736DS** – 36"

- 600 CFM high-performance blower
- Sound silencing system
- Manual 3-speed selection
- Boost function
- LED task lighting

Overall Product Dimensions  
36" w x 33<sup>7/8</sup>-55<sup>1/2</sup>" h x 19<sup>3/4</sup>" d



### 36"/30" Pyramid-Style Wall-Mount Canopy Hood

**JXW8536DS** – 36"

**JXW8530DS** – 30"

- Perimetric extraction
- 600 CFM high-performance blower
- Manual 3-speed selection
- Boost function
- LED task lighting
- Upward facing LED ambient lighting

Overall Product Dimensions  
36-inch – 36" w x 24<sup>5/8</sup>-42<sup>5/8</sup>" h x 19<sup>11/16</sup>" d  
30-inch – 30" w x 24<sup>5/8</sup>-42<sup>5/8</sup>" h x 19<sup>11/16</sup>" d



### Sound Silencing System

Innovative technology brings a distinct level of silence to premium hoods while maintaining high performance. The Jenn-Air® sound silencing system found on select hoods optimizes air flow, increasing the amount of air taken in and decreasing the noise emitted. You'll never have to worry about disrupting pre-dinner conversation with this noise-reduction system.



### LED Ambient Lighting

Upward-facing LED lighting gently illuminates the kitchen by projecting ambient light up onto the ceiling and walls, creating a soft, elegant glow. Available on JXI8536DS, JXW8536DS and JXW8530DS.





### 6-Level Built-In Exterior Exhaust System

This system helps maintain a pleasant living environment as the ventilation fan automatically activates when the temperature around the microwave gets too high. Additionally, these microwave ovens can be vented three ways: out the top, out the back or re-circulated utilizing a charcoal filter.



### 30" Over-the-Range Microwave Oven with Convection

**JMV9196C** – 30"

#### Style Options:



Overall Product Dimensions  
29<sup>7/8</sup>" w x 17<sup>9/16</sup>" h x 16<sup>9/16</sup>-17<sup>5/16</sup>" d

- Convection & microwave combination cooking
- Sensor cooking
- 53 menu programs
- 1,600-watt convection element
- Perimetric venting
- 6-level, built-in exterior exhaust system



### Full-Width Chimney Cover – 12" Height

**W10272081** or **EXTKIT06ES** – 48"

**W10272080** or **EXTKIT04ES** – 36"

**W10272079** or **EXTKIT02ES** – 30"

- Coordinates with Pro-Style™ hoods
- Covers the chimney for a seamless look
- Complements the look of commercial-style appliances



### 30" Over-the-Range Microwave Oven

**JMV8208C** – 30"

#### Style Options:



Overall Product Dimensions  
29<sup>7/8</sup>" w x 17<sup>9/16</sup>" h x 16<sup>9/16</sup>-17<sup>5/16</sup>" d

- Sensor cooking
- 35 menu programs
- Perimetric extraction
- 6-level, built-in exterior exhaust system



### Stainless Steel Backsplash with Two Shelves

**W10285449** – 48"

**W10285448** – 36"

**W10285447** – 30"

- Adds to commercial styling of Pro-Style™ hoods
- Protects the wall behind a cooking surface
- Shelves can be used for ingredient placement or plate staging/warming



### 1,200 CFM Internal Blower Motor

**UXB1200DYS**

- For use with custom hood liners JXL6536CSS, UXL6048YSS and UXL6036YSS
- Exhausts 1,200 CFM/Rated up to 105,000 BTUs
- 3 speed levels
- 10" round duct



### 600 CFM Internal Blower Motor

**UXB0600DYS**

- For use with custom hood liners JXL6536CSS, UXL6048YSS and UXL6036YSS
- Exhausts 600 CFM/Rated up to 65,000 BTUs
- 3 speed levels
- 10" round duct



## Downdraft Ventilation



## 1,200 CFM In-Line Blower Motor

**UXI1200DYS**

- For use with Accolade® Downdraft System JXD7836BS and custom hood liners JXL6536CSS, UXL6048YSS and UXL6036YSS
- Exhausts 1,200 CFM/Rated up to 105,000 BTUs
- 3 speed levels
- 10" round duct



## Make-Up Air Kit

**W10446917** – fits 10" round duct**W10446916** – fits 8" round duct**W10446915** – fits 6" round duct**W10446914** – fits 3 1/4" x 10" rectangular duct

- For use with all hoods greater than 400 CFM



## Optional Black Top Trim

**W10387677** – 36"**W10387676** – 30"

- For use with telescoping downdraft ventilation systems
- Coordinates with Black and Black Floating Glass appliances



## Microwave Oven Filler Kit

**8171339****8171337****Style Option:****S** Stainless Steel**B** Black

- For use with over-the-range microwave ovens
- Use when installing in a 36" wide opening
- Includes two panels

	ACCOLADE® DOWNDRAFT SYSTEM	TELESCOPING DOWNDRAFT VENTILATION	MODULAR DOWNDRAFT VENTILATION	
MODEL #	36"	36"	30"	4"
Overall Product Dimensions – w x h x d (in)	40 3/4 x 18 1/2 x 10 3/8	36 x 13 1/2 x 2	30 x 13 1/2 x 2	4 x 21
Approximate Shipping Weight (lb)	286	76	70	46
Volts/Amps Required	120/15	120/15	120/15	120/15
<b>VENTILATION FEATURES</b>				
High-Performance Blower	In-Line (sold separately)	■	■	—
Blower CFM Rating	1,200	600	600	350
Sone Rating (at High)	7.5	7.9	7.9	8.0
Rise (height above cooktop)	19-Inch	14-Inch	14-Inch	N/A
Dishwasher-Safe Filters	Aluminum Mesh with Stainless Steel Frame	Premium Mesh	Premium Mesh	Metal
Magnetic Filter Lock	■	—	—	—
Lighting Type	Ambient LED	—	—	Ambient LED
Internally Mounted Power System	—	■	■	■
Reversible Motor Box <sup>A</sup>	—	■	■	—
3 Exhaust Positions	■	—	—	—
Exterior Venting	10" Round	6" Round or 3 1/4" x 10" Rectangular	6" Round or 3 1/4" x 10" Rectangular	6" Round or 3 1/4" x 10" Rectangular
<b>CONTROL FEATURES</b>				
Hidden Slide Controls	■	■	■	—
Remote Control	■	—	—	—
Fan Speed Settings	4	4	4	2
Clean Filter Indicator	■	—	—	—
Timer Function	■	—	—	■
Automatic Shut-Off when Retracted	■	■	■	N/A
<b>OPTIONAL/REQUIRED ACCESSORIES</b>				
1,200 CFM In-Line Blower Motor	UXI1200DYS <sup>B</sup> (required)	—	—	—
Make-Up Air Kit				
6" Round	—	W10446915	W10446915	—
3 1/4" x 10" Rectangular	—	W10446914	W10446914	—
10" Round	W10446917	—	—	—
Stainless Top Trim	—	W10187289	W10187287	—
Black Top Trim	—	W10387677	W10387676	—
<b>EXTERIOR DESIGN FEATURES</b>				
Curved Retractable Downdraft Design	■	—	—	—
Slim Profile	—	■	■	N/A
Integrated Styling	—	■	■	■
Style Option (add letter to end of model number)	Complements Pro-Style® Stainless	—	—	—
Euro-Style Stainless	Complements Euro-Style Stainless Suite	S	S	S

A. Motor box can be installed to face front or back of cabinets to accommodate more installation options. Installing the motor on the back of the hood plenum requires cabinetry deeper than standard cabinetry.

B. Rated up to 108,000 BTUs.

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to installation instructions packaged with product *before* selecting cabinetry, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

	WALL-MOUNT			LOW PROFILE UNDER CABINET	
MODEL #	48"	36"	30"	36"	30"
Overall Product Dimensions – w x h x d (in)	48 x 19 <sup>3</sup> / <sub>8</sub> x 25	36 x 19 <sup>3</sup> / <sub>8</sub> x 25	30 x 19 <sup>3</sup> / <sub>8</sub> x 25	36 x 10 <sup>1</sup> / <sub>2</sub> x 23	30 x 10 <sup>1</sup> / <sub>2</sub> x 23
Approximate Shipping Weight (lb)	147	110	102	55	49
Volts/Amps Required	120/15	120/15	120/15	120/15	120/15
<b>VENTILATION FEATURES</b>					
High-Performance Blower(s)	Dual	■	■	■	■
Blower CFM Rating	1,200	600	600	600	600
Sone Rating (at High)	11.5	10	10	12	12
Dishwasher-Safe Filters	Stainless Steel Baffle	Stainless Steel Baffle	Stainless Steel Baffle	Stainless Steel Baffle	Stainless Steel Baffle
Number of Lights (bulbs included)	3	2	2	2	2
Lighting Levels	2	2	2	2	2
Lighting Type	Halogen	Halogen	Halogen	Halogen	Halogen
Food Warming Lamps (bulbs included) <sup>A</sup>	2	2	2	—	—
Exterior Venting	10" Round	10" Round	10" Round	3 <sup>1</sup> / <sub>4</sub> " x 10" Rectangular	3 <sup>1</sup> / <sub>4</sub> " x 10" Rectangular
<b>CONTROL FEATURES</b>					
Knob Controls	■	■	■	■	■
Fan Speed Settings	4	4	4	4	4
<b>OPTIONAL ACCESSORIES</b>					
Make-Up Air Kit 3 <sup>1</sup> / <sub>4</sub> " x 10" Rectangular	—	—	—	W10446914	W10446914
10" Round	W10446917	W10446917	W10446917	—	—
Stainless Steel Backsplash with Two Shelves	W10285449	W10285448	W10285447	W10285448	W10285447
Full-Width Chimney Cover – 12" Height	W10272081 or EXTKIT06ES	W10272080 or EXTKIT04ES	W10272079 or EXTKIT04ES	W10272080 or EXTKIT04ES	W10272079 or EXTKIT02ES
<b>EXTERIOR DESIGN FEATURES</b>					
Canopy Height	18"	18"	18"	11"	11"
Style Option (add letter to end of model number) Pro-Style® Stainless	P	P	P	P	P

A. Hood comes with 175-watt PAR-38 infrared bulbs. Hood will also accept 250-watt R40 infrared bulbs.

MODEL #	48"	36"	36"	30"
UXL6048YS	UXL6036YS	JXL6536CSS	UXL5430BSS	
Overall Product Dimensions – w x h x d (in)	47 <sup>7</sup> / <sub>8</sub> x 11 <sup>1</sup> / <sub>2</sub> x 22	35 <sup>7</sup> / <sub>8</sub> x 11 <sup>1</sup> / <sub>2</sub> x 22	35 <sup>7</sup> / <sub>8</sub> x 11 <sup>1</sup> / <sub>2</sub> x 22	30 x 11 <sup>7</sup> / <sub>8</sub> x 13 <sup>5</sup> / <sub>8</sub>
Approximate Shipping Weight (lb)	66	51	51	40
Volts/Amps Required	120/15	120/15	120/15	120/15
<b>VENTILATION FEATURES</b>				
High-Performance Blower	Internal or In-Line (sold separately)	Internal or In-Line (sold separately)	Internal or In-Line (sold separately)	Internal
Blower CFM Rating	600 or 1,200 with Separate Blower Motor <sup>A</sup>	600 or 1,200 with Separate Blower Motor <sup>A</sup>	600 or 1,200 with Separate Blower Motor <sup>A</sup>	400
Dishwasher-Safe Filters	Stainless Steel Baffle	Stainless Steel Baffle	Stainless Steel Baffle	Metal
Number of Lights (bulbs included)	4	4	4	2
Standard and Night Light Settings	■	■	■	Standard Only
Lighting Type	Halogen	Halogen	Halogen	Halogen
Exterior Venting	10" Round	10" Round	10" Round	6" Round
Thermal Protector	—	—	■	—
<b>CONTROL FEATURES</b>				
Controls	Hidden Slide	Hidden Slide	Robust Knobs	Push Button
Fan Speed Settings	3	3	3	3
Auto Sense Option	■	■	■	—
<b>OPTIONAL/REQUIRED ACCESSORIES</b>				
Recirculation Kit	—	—	—	W10490330
600 CFM Internal Blower Motor	UXB0600DYS <sup>B</sup>	UXB0600DYS <sup>B</sup>	UXB0600DYS <sup>B</sup>	—
1,200 CFM Internal Blower Motor	UXB1200DYS <sup>C</sup>	UXB1200DYS <sup>C</sup>	UXB1200DYS <sup>C</sup>	—
1,200 CFM In-Line Blower Motor	UXI1200DYS <sup>C</sup>	UXI1200DYS <sup>C</sup>	UXI1200DYS <sup>C</sup>	—
Grease Filter	W10351892	W10351892	—	—
Replacement Charcoal Filters (for non-vented installations)	—	—	—	W10272068
Dishwasher-Safe Stainless Steel Baffle Filter	W10351855A <sup>D</sup>	W10351855A <sup>E</sup>	W10351955A <sup>F</sup>	—
Extension Panel Kits 42" Spacer Kit	—	—	W10646268	—
48" Spacer Kit	W10646269	—	W10646269	—
Make-Up Air Kit (fits 10" round duct)	W10446917	W10446917	W10446917	—
Stainless Steel Backsplash with Two Shelves 30"	—	—	—	W10285447
36"	W10285448	W10285448	W10285448	—
48"	W10285449	W10285449	W10285449	—

A. Accepts either a 600 or 1,200 CFM internal or in-line blower motor, sold separately.

B. Rated up to 65,000 BTUs.

C. Rated up to 105,000 BTUs.

D. Order four filters for 48" model UXL6048YS.

E. Order three filters for 36" model UXL6036YS.

F. Order two filters for 36" model JXL6536CSS.

## Low Profile Island-Mount and Wall-Mount Canopy Hoods

	ISLAND-MOUNT			WALL-MOUNT	
	36"	42"	36"	36"	36"
MODEL #	JXI8936DS	JXI8742DS	JXI8736DS	JXW8936DS	JXW8736DS
Overall Product Dimensions – w x h (min.-max.) x d (in)	36 x 29 <sup>5/8</sup> -46 <sup>7/8</sup> x 24	42 x 30 <sup>3/8</sup> -47 <sup>5/8</sup> x 24	36 x 30 <sup>3/8</sup> -47 <sup>5/8</sup> x 24	36 x 29 <sup>5/8</sup> -46 <sup>7/8</sup> x 21 <sup>9/16</sup>	36 x 33 <sup>7/8</sup> -55 <sup>1/2</sup> x 19 <sup>3/4</sup>
Approximate Shipping Weight (lb)	143	143	143	143	143
Volts/Amps Required	120/15	120/15	120/15	120/15	120/15
VENTILATION FEATURES					
High-Performance Blower	■	■	■	■	■
Blower CFM Rating	600	600	600	600	600
Sound Silencing System	■	■	■	■	■
Sone Rating (at High)	5.77	5.06	5.06	5.77	5.06
Dishwasher-Safe Filters	■	■	■	■	■
Number of Lights	4	2	2	3	2
Lighting Levels	1	1	1	1	1
Lighting Type	LED	LED	LED	LED	LED
Exterior Venting	■	■	■	■	■
Installation Option (Recirculation Installation Kit Required)	■	■	■	■	■
Perimetric Extraction	■	—	—	■	—
CONTROL FEATURES					
Controls	Push Button	Push Button	Push Button	Push Button	Push Button
Fan Speed Settings	3	3	3	3	3
Auto Sense Option	■	■	■	■	■
Timer Function	■	■	■	■	■
Boost Function	■	■	■	■	■
Sleep Mode	■	■	■	■	■
Clean Filter Indicator	■	■	■	■	■
OPTIONAL ACCESSORIES					
Recirculation Installation Kit 7'9" to 9'8"	W10646865	W10646865	W10646865	—	—
7'9" to 10'4"	—	—	—	W10685949	W10685949
9'1" to 11'	W10646866	W10646866	W10646866	—	—
9'6" to 12'	—	—	—	W10686362	W10686362
10'2" to 12'	W10685947	W10685947	W10685947	—	—
Replacement Charcoal Filter	W10272069	W10272069	W10272069	W10272069	W10272069
Replacement Grease Filter	W10291612	W10291612	W10291612	W10291612	W10291612
Make-Up Air Kit	W10446915	W10446915	W10446915	W10446915	W10446915
6" to 8" Adapter	W10685950	W10685950	W10685950	W10685950	W10685950
Chimney Extension for 9'-12' Ceilings 9'1" to 11'	W10685946	W10685946	W10685946	—	—
9'6" to 12'	—	—	—	W10646864 or EXTKIT24ES	W10646864 or EXTKIT24ES
10'2" to 12'	W10646863 or EXTKIT22ES	W10646863 or EXTKIT22ES	W10646863 or EXTKIT22ES	—	—

## Pyramid-Style Island-Mount and Wall-Mount Canopy Hoods

	ISLAND-MOUNT	WALL-MOUNT	
	36"	36"	30"
MODEL #	JXI8536DS	JXW8536DS	JXW8530DS
Overall Product Dimensions – w x h (min.-max.) x d (in)	36 x 32 <sup>1/2</sup> -52 <sup>9/16</sup> x 27	36 x 24 <sup>5/8</sup> -42 <sup>5/8</sup> x 19 <sup>11/16</sup>	30 x 24 <sup>5/8</sup> -42 <sup>5/8</sup> x 19 <sup>11/16</sup>
Approximate Shipping Weight (lb)	102	60	57
Volts/Amps Required	120/15	120/15	120/15
VENTILATION FEATURES			
High-Performance Blower	■	■	■
Blower CFM Rating	600	600	600
Sone Rating (at High)	6.78	6.78	6.78
Dishwasher-Safe Filters	■	■	■
Lighting Type	LED	LED	LED
Task Lighting	■	■	■
Number of Lights	4	2	2
Lighting Levels	1	1	1
Ambient Lighting	■	■	■
Exterior Venting	■	■	■
Installation Option (Recirculation Installation Kit Required)	■	■	■
Perimetric Extraction	■	■	■
CONTROL FEATURES			
Glass-Touch Electronic Controls	■	■	■
Fan Speed Settings	3	3	3
Auto Sense Option	■	■	■
Timer Function	■	■	■
Boost Function	■	■	■
Sleep Mode	■	■	■
OPTIONAL ACCESSORIES			
Recirculation Installation Kit	W10692909	W10692908	W10692908
Replacement Charcoal Filter	W10690910	W10692910	W10692910
Make-Up Air Kit	W10446915	W10446915	W10446915
Inline Smart Blower Kit	W10692945	W10692945	W10692945
Chimney Extension 9'2" to 12'	W10272078	W10272075 or EXTKIT12ES	W10272075 or EXTKIT12ES

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to installation instructions packaged with product *before* selecting cabinetry, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to installation instructions packaged with product *before* selecting cabinetry, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

## Over-the-Range Microwave Ovens

30"		
MODEL #	JMV9196C	JMV8208C
Overall Product Dimensions – w x h x d (min.-max.) (in) <sup>A</sup>	29 <sup>7/8</sup> x 17 <sup>9/16</sup> x 16 <sup>9/16</sup> - 17 <sup>5/16</sup>	29 <sup>7/8</sup> x 17 <sup>9/16</sup> x 16 <sup>9/16</sup> - 17 <sup>5/16</sup>
Opening/Clearance Dimensions – w x d (in)	30 x 12-14	30 x 12-14
Approximate Shipping Weight (lb)	77	77
Volts/Amps Required	120/15-20	120/15-20
<b>MICROWAVE OVEN FEATURES</b>		
Oven Capacity (cu. ft.)	1.9	2.0
Power Output (watts)	900	1,000
Power Levels	10	10
Convection Element Wattage	1,600	—
Blower CFM Rating	400	400
Exhaust Fan Speeds	6	6
Cooling Fan for Microwave Mode	■	■
Perimetric Venting	■	■
Exterior Venting or Recirculating	■	■
Stainless Steel Interior	■	■
Halogen Theater Lighting	■	—
Glass Turntable	■	■
Convection & Microwave Combination Cooking	■	—
Auto Sensor Microwave Cooking	■	■
Auto Sensor Reheat Option	—	■
Auto Non-Sensed Microwave Cooking	—	Frozen Entree
Warm Hold Function	■	■
Auto Defrost	4 Defrost Menu Programs	4 Defrost Menu Programs
Soft/Melt	■	■
Removable Cooking Rack	■	■
Convection Rack Accessory	■	—
Charcoal Filter	■	■
Grease Filter(s)	■	■
Filter Status Indicator	■	■
<b>CONTROL FEATURES</b>		
Glass-Touch Electronic Controls	■	■
Memory Programming	4-Stage	3-Stage
My Creations	■	—
Kitchen Timer	■	■
One-Touch Start	■	■
Menu Programs	53 (8 categories)	35 (6 categories)
More/Less Time Adjustment	■	■
Add 1 Minute Touch Pad	■	■
Auto Sense Option	6-Speeds	6-Speeds
Timer Function	■	■
Audible Chimes	■	■
Control Lock	■	■
<b>OPTIONAL ACCESSORIES</b>		
Replacement Charcoal Filter	8206230	8206230
Replacement Grease Filter	W10208631	W10208631
Filler Kit (Stainless)	8171339	8171339
Filler Kit (Black)	8171337	8171337
Heat Deflector for Black Over-the-Range Microwave Oven <sup>B</sup>	W10737014	W10737014
<b>EXTERIOR DESIGN FEATURES</b>		
Side-Swing Door	■	■
One-Piece Door Front	■	■
Pocket Handle	■	■
Halogen Task Lighting	■	■
Style Options (add letter to end of model number)		
Stainless Steel Exterior Finish	S	S
Black Exterior Finish	B	B

A. Depth with door +/- 3/8 inches.

B. For use when pairing with gas or dual-fuel ranges.

## Ventilation and Pro-Style® Rangetop Pairings

PRO-STYLE® RANGETOPS				
MODELS	60,000 BTU TOTAL OR MORE		LESS THAN 60,000 BTU TOTAL	
	48"	36"	36"	30"
<b>VENTILATION STYLES</b>				
<b>ACCOLADE® DOWNDRAFT SYSTEM</b>				
JXD7836BS	—	■	■	■
<b>TELESCOPING DOWNDRAFT SYSTEMS</b>				
JXD7036YS	—	— <sup>A</sup>	—	—
JXD7030YS	—	—	—	—
<b>PRO-STYLE™ HOODS</b>				
JXW9048WP	■	■	■	■
JXW9036WP/JXU9136WP	—	■	■	■
JXW9030WP/JXU9130WP	—	—	—	■
<b>CUSTOM HOOD LINERS<sup>B</sup></b>				
UXL6048YSS	■	■	■	■
UXL6036YSS	—	■	■	■
JXL6536CSS	—	1,200 CFM only		■
UXL5430BSS	—	—	—	■
<b>ISLAND-MOUNT PERIMETRIC CANOPY HOOD</b>				
JXI8936DS	—	—	■	■
<b>ISLAND-MOUNT CANOPY HOODS</b>				
JXI8742DS	—	—	■	■
JXI8736DS/JXI8536DS	—	—	■	■
<b>WALL-MOUNT PERIMETRIC CANOPY HOOD</b>				
JXW8936DS	—	—	■	■
<b>WALL-MOUNT CANOPY HOODS</b>				
JXW8736DS/JXW8536DS	—	—	■	■
JXW8530DS	—	—	—	■

A. Ventilation system JXD7036YS and Pro-Style® Rangetop JGCP436WP have installation restrictions that do not permit them to be installed as a pair.

B. Custom hood liners can be used with any of the following blower motors: UXB1200DYS, UXB0600DYS or UXI1200DYS.

KEY	
■	Recommended
—	Not Recommended

## Ventilation and Cooktop Pairings

GAS COOKTOPS										
MODELS	60,000 BTU TOTAL OR MORE			LESS THAN 60,000 BTU TOTAL						
	36"	30"	36"	30"	JGC7636B (78,000 BTU Total)	JGC3536G (65,000 BTU Total)	JGC7530B (60,000 BTU Total)	JGC2536EB (57,000 BTU Total)	JGC2530EB (57,000 BTU Total)	JGC3530G (59,000 BTU Total)
<b>VENTILATION STYLES</b>										
<b>ACCOLADE® DOWNDRAFT SYSTEM</b>										
JXD7836BS	■	■	■	■	■	■	■			
<b>TELESCOPING DOWNDRAFT SYSTEMS</b>										
JXD7036YS	—	■	■	■	■	■	■			
JXD7030YS	—	—	■	■	—	■	■			
<b>PRO-STYLE™ HOODS</b>										
JXW9048WP	■	■	■	■	■	■	■			
JXW9036WP/JXU9136WP	■	■	■	■	■	■	■			
JXW9030WP/JXU9130WP	—	—	■	—	■	■	■			
<b>CUSTOM HOOD LINERS<sup>A</sup></b>										
UXL6048YSS / UXL6036YSS	1,200 CFM only	■	■	■	■	■	■			
JXL6536CSS	1,200 CFM only	■	■	■	■	■	■			
UXL5430BSS	—	—	—	—	■	■	■			
<b>ISLAND-MOUNT PERIMETRIC CANOPY HOOD</b>										
JXI8936DS	■	■	■	■	■	■	■			
<b>ISLAND-MOUNT CANOPY HOOD</b>										
JXI8742DS	■	■	■	■	■	■	■			
JXI8736DS/JXI8536DS	■	■	■	■	■	■	■			
<b>WALL-MOUNT PERIMETRIC CANOPY HOOD</b>										
JXW8936DS	■	■	■	■	■	■	■			
<b>WALL-MOUNT CANOPY HOODS</b>										
JXW8736DS/JXW8536DS	■	■	■	■	■	■	■			
JXW8530DS	—	—	■	—	■	■	■			
<b>ELECTRIC COOKTOPS</b>										
MODELS	<b>INDUCTION</b>		<b>CONVENTIONAL</b>							
	36"	30"	36"	30"	JIC4536X	JIC4430X	JEC4536B	JEC3536B	JEC4430B	JEC3430B
<b>VENTILATION STYLES</b>										
<b>ACCOLADE® DOWNDRAFT SYSTEM</b>										
JXD7836BS	■	■	■	■	■	■	■	■	■	■
<b>TELESCOPING DOWNDRAFT SYSTEMS</b>										
JXD7036YS	■	■	■	■	■	■	■	■	■	■
JXD7030YS	—	■	—	—	—	■	■	■	■	■
<b>PRO-STYLE™ HOODS</b>										
JXW9048WP	■	■	■	■	■	■	■	■	■	■
JXW9036WP/JXU9136WP	■	■	■	■	■	■	■	■	■	■
JXW9030WP/JXU9130WP	—	■	—	—	—	■	■	■	■	■
<b>CUSTOM HOOD LINERS<sup>A</sup></b>										
UXL6048YSS / UXL6036YSS	■	■	■	■	■	■	■	■	■	■
JXL6536CSS	■	■	■	■	■	■	■	■	■	■
UXL5430BSS	—	■	—	—	—	■	■	■	■	■
<b>ISLAND-MOUNT PERIMETRIC CANOPY HOOD</b>										
JXI8936DS	■	■	■	■	■	■	■	■	■	■
<b>ISLAND-MOUNT CANOPY HOODS</b>										
JXI8742DS	■	■	■	■	■	■	■	■	■	■
JXI8736DS/JXI8536DS	■	■	■	■	■	■	■	■	■	■
<b>WALL-MOUNT PERIMETRIC CANOPY HOOD</b>										
JXW8936DS	■	■	■	■	■	■	■	■	■	■
<b>WALL-MOUNT CANOPY HOODS</b>										
JXW8736DS/JXW8536DS	■	■	■	■	■	■	■	■	■	■
JXW8530DS	—	■	—	—	—	■	■	■	■	■

A. Custom hood liners can be used with any of the following blower motors: UXB1200DYS, UXB0600DYS or UXI1200DYS.

KEY
■ Recommended
— Not Recommended



## Ventilation and Modular Cooktop Pairings

### Updraft or Downdraft Ventilation Systems (excluding Modular Downdraft System)

Jenn-Air® modular cooktops and companion 30- or 36-inch gas cooktops (models JGC3530G or JGC3536G) can be paired with any of our updraft or downdraft ventilation systems. The ventilation solution must be at least as wide as the cooking surface. For specific guidelines, consult the Installation Instructions for the module(s) selected.

Examples:

- A 30-inch hood can be used for up to two 15-inch modules or up to one 30-inch cooktop (model JGC3530G)
- A 36-inch hood can be used for up to two 15-inch modules or up to one 36-inch cooktop (model JGC3536G)
- A 48-inch hood can be used for up to three 15-inch modules or one 30-inch cooktop (model JGC3530G) + one module
- For any combination over 48 inches, combine multiple hoods to accommodate necessary width of cooktop

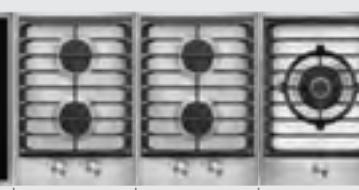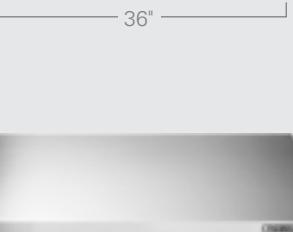

### Modular Downdraft System

The modular downdraft system is designed to match the traditional or flush installation of all Jenn-Air® modular cooktops and companion 30- or 36-inch gas cooktops (models JGC3530G or JGC3536G). For specific guidelines, consult the Installation Instructions for the module(s) selected.

Examples:

- Use one strip for every two 15-inch modules or one 30-inch cooktop (model JGC3530G)
- Do not put a strip on both sides of a 15-inch gas (models JGC3215G or JGC3115G)
- Place a strip on each side of a 30-inch (model JGC3530G) or 36-inch gas cooktop (model JGC3536G)



## Ventilation and Pro-Style® Range Pairings

PRO-STYLE® DUAL-FUEL, NATURAL GAS AND LP RANGES						
MODELS	60,000 BTU TOTAL OR MORE					
	48"		36"			
JDRP548WP (90,000 BTU Total)	JGRP548WP (90,000 BTU Total)	JLRP548WP (64,000 BTU Total)	JDRP436WP (90,000 BTU Total)	JGRP436WP (90,000 BTU Total)	JLRP436WP (64,000 BTU Total)	
<b>VENTILATION STYLES</b>						
<b>ACCOLADE® DOWNDRAFT SYSTEM</b>						
JXD7836BS	—	—	—	■	—	—
<b>TELESCOPING DOWNDRAFT SYSTEMS</b>						
JXD7036YS	—	—	—	—	— <sup>A</sup>	— <sup>A</sup>
JXD7030YS	—	—	—	—	—	—
<b>PRO-STYLE™ HOODS</b>						
JXW9048WP	■	■	■	■	■	■
JXW9036WP/JXU9136WP	—	—	—	■	■	■
JXW9030WP/JXU9130WP	—	—	—	—	—	—
<b>CUSTOM HOOD LINERS<sup>B</sup></b>						
UXL6048YSS	■	■	■	■	■	■
UXL6036YSS	—	—	—	■	■	■
JXL6536CSS	—	—	—	1,200 CFM only	1,200 CFM only	■
UXL5430BSS	—	—	—	—	—	—
<b>ISLAND-MOUNT PERIMETRIC CANOPY HOOD</b>						
JXI8936DS	—	—	—	—	—	■
<b>ISLAND-MOUNT CANOPY HOODS</b>						
JXI8742DS	—	—	—	—	—	■
JXI8736DS/JXI8536DS	—	—	—	—	—	■
<b>WALL-MOUNT PERIMETRIC CANOPY HOOD</b>						
JXW8936DS	—	—	—	—	—	■
<b>WALL-MOUNT CANOPY HOODS</b>						
JXW8736DS/JXW8536DS	—	—	—	—	—	■
JXW8530DS	—	—	—	—	—	—
<b>MODELS</b>						
36"		30"				
JDRP536WP (55,000 BTU Total)	JGRP536WP (55,000 BTU Total)	JLRP536WP (39,000 BTU Total)	JDRP430WP (55,000 BTU Total)	JGRP430WP (55,000 BTU Total)	JLRP430WP (39,000 BTU Total)	
<b>VENTILATION STYLES</b>						
<b>ACCOLADE® DOWNDRAFT SYSTEM</b>						
JXD7836BS	■	—	—	■	—	—
<b>TELESCOPING DOWNDRAFT SYSTEMS</b>						
JXD7036YS	—	—	—	—	—	—
JXD7030YS	—	—	—	—	—	—
<b>PRO-STYLE™ HOODS</b>						
JXW9048WP	■	■	■	■	■	■
JXW9036WP/JXU9136WP	■	■	■	■	■	■
JXW9030WP/JXU9130WP	—	—	—	■	■	■
<b>CUSTOM HOOD LINERS<sup>B</sup></b>						
UXL6048YSS / UXL6036YSS	■	■	■	■	■	■
JXL6536CSS	■	■	■	■	■	■
UXL5430BSS	—	—	—	■	■	■
<b>ISLAND-MOUNT PERIMETRIC CANOPY HOOD</b>						
JXI8936DS	■	■	■	■	■	■
<b>ISLAND-MOUNT CANOPY HOODS</b>						
JXI8742DS	■	■	■	■	■	■
JXI8736DS/JXI8536DS	■	■	■	■	■	■
<b>WALL-MOUNT PERIMETRIC CANOPY HOOD</b>						
JXW8936DS	■	■	■	■	■	■
<b>WALL-MOUNT CANOPY HOODS</b>						
JXW8736DS/JXW8536DS	■	■	■	■	■	■
JXW8530DS	—	—	—	■	■	■

A. Ventilation system JXD7036YS and Pro-Style® Ranges JGRP436WP or JLRP436WP have installation restrictions that do not permit them to be installed as a pair.

B. Custom hood liners can be used with any of the following blower motors: UXB1200DYS, UXB0600DYS or UXI1200DYS.

KEY	
■	Recommended
—	Not Recommended

## Ventilation and Range Pairings

30" RANGES			
MODELS	DUAL-FUEL AND GAS – LESS THAN 60,000 BTU TOTAL	INDUCTION	ELECTRIC
	JDS1450F (56,200 BTU Total)	JGS1450F (56,200 BTU Total)	JIS1450D
<b>VENTILATION STYLES</b>			
<b>ACCOLADE® DOWNDRAFT SYSTEM</b>			
JXD7836BS	—	—	—
<b>TELESCOPING DOWNDRAFT SYSTEMS</b>			
JXD7036YS	—	—	—
JXD7030YS	—	—	—
<b>PRO-STYLE™ HOODS</b>			
JXW9048WP	■	■	■
JXW9036WP/JXU9136WP	■	■	■
JXW9030WP/JXU9130WP	■	■	■
<b>CUSTOM HOOD LINERS<sup>A</sup></b>			
UXL6048YSS / UXL6036YSS	■	■	■
JXL6536CSS	■	■	■
UXL5430BSS	■	■	■
<b>ISLAND-MOUNT PERIMETRIC CANOPY HOOD</b>			
JXI8936DS	■	■	■
<b>ISLAND-MOUNT CANOPY HOODS</b>			
JXI8742DS	■	■	■
JXI8736DS/JXI8536DS	■	■	■
<b>WALL-MOUNT PERIMETRIC CANOPY HOOD</b>			
JXW8936DS	■	■	■
<b>WALL-MOUNT CANOPY HOODS</b>			
JXW8736DS/JXW8536DS	■	■	■
JXW8530DS	■	■	■

A. Custom hood liners can be used with any of the following blower motors: UXB1200DYS, UXB0600DYS or UXI1200DYS.

KEY	
■	Recommended
—	Not Recommended

## BUILT-IN REFRIGERATORS FRESH, TASTEFUL DESIGN

Jenn-Air® built-in refrigerators offer exterior design options that allow them to blend in beautifully, or become a striking focal point in a kitchen. In addition to fully integrated models that accept custom overlay panels, Jenn-Air® built-in refrigerators coordinate with other stainless steel Pro-Style® and Euro-Style appliances. Side-by-side, French door and bottom-freezer configurations provide storage and access options that fit any lifestyle.



Because of its prominence in the kitchen, it's important that a built-in refrigerator draw attention for the right reasons. Our **fully integrated and flush refrigerators** feature an articulating hinge that allows the refrigerator to blend into custom cabinetry because it requires little to no side clearance. The hinge emphasizes the quiet operation of all Jenn-Air® built-in refrigerators – some operate at levels comparable to the quietest dishwashers on the market.

Going beyond the striking exterior, French door and bottom-freezer refrigerators feature the **Twin Fresh™ climate control system** with sequential dual evaporators that allow true independent temperature control, reduce common food odors and keep humidity at optimum levels in both the refrigerator and freezer.



Our industry-exclusive **Obsidian interior finish** is a signature feature on every built-in refrigerator. The deep charcoal finish includes a shimmer that allows contents to "pop" visually against a contrasting background. Metal accents on the shelves, drawers and door bins complement the elegant look that extends into the freezer.



## 48"/42" Fully Integrated Side-by-Side Base Unit

**JS48NFXDE** – 48"

**JS42NFXDE** – 42"

- Industry-exclusive Obsidian interior with metal accents
- Fully integrated and flush design with articulating hinges
- Precision Temperature Management™ system with variable-speed compressor
- Advanced Climate Control drawer
- Soft, auto-close crisper drawers



### Custom Overlay Design

Requires custom overlay panels and handles, not included.

Custom overlay panels and handles must be ordered separately from a cabinet maker or other manufacturer. Handle kits available to coordinate with Pro-Style® suite and Euro-Style suite. See page 130.

### Coordinating Stainless Panel Kits

Customize your refrigerator to match our Pro-Style® or Euro-Style kitchen suite designs with one of our suite-coordinating panel kits. To do so, you must order one refrigerator base unit JS48NFXDE or JS42NFXDE and one of the panel kits.

Overall Product Dimensions  
48-inch – 47 $\frac{3}{4}$ " w x 83 $\frac{1}{8}$ " h x 24" d\*  
42-inch – 41 $\frac{3}{4}$ " w x 83 $\frac{1}{8}$ " h x 24" d\*



## 36" Fully Integrated Bottom-Freezer Base Unit

**JB36NFXRE** – 36" with Right-Hand Door Swing

**JB36NFXLE** – 36" with Left-Hand Door Swing

- Industry-exclusive Obsidian interior with metal accents
- Fully integrated and flush design with articulating hinges
- Twin Fresh™ climate control system with sequential dual evaporators
- Soft, auto-close crisper drawers



### Custom Overlay Design

Requires custom overlay panels and handles, not included.

Custom overlay panels and handles must be ordered separately from a cabinet maker or other manufacturer. Handle kits available to coordinate with Pro-Style® suite and Euro-Style suite. See page 130.

### Coordinating Stainless Panel Kits

Customize your refrigerator to match our Pro-Style® or Euro-Style kitchen suite designs with a coordinating stainless panel kit. To do so, you must order one refrigerator base unit JB36NFXRE or JB36NFXLE and one of the panel kits.

Overall Product Dimensions  
35 $\frac{3}{4}$ " w x 83 $\frac{1}{8}$ " h x 24" d\*



## 42"/36" Fully Integrated French Door Base Unit

**JF42NFXDE** – 42"

**JF36NFXDE** – 36"

- Industry-exclusive Obsidian interior with metal accents
- Fully integrated and flush design with articulating hinges
- Twin Fresh™ climate control system with sequential dual evaporators
- Soft, auto-close crisper drawers



### Custom Overlay Design

Requires custom overlay panels and handles, not included.

Custom overlay panels and handles must be ordered separately from a cabinet maker or other manufacturer. Handle kits available to coordinate with Pro-Style® suite and Euro-Style suite. See page 130.

### Coordinating Stainless Panel Kits

Customize your refrigerator to match our Pro-Style® or Euro-Style kitchen suite designs with one of our suite-coordinating panel kits. To do so, you must order one refrigerator base unit JF42NFXDE or JF36NFXDE and one of the panel kits.

Overall Product Dimensions  
42-inch – 41 $\frac{3}{4}$ " w x 83 $\frac{1}{8}$ " h x 24" d\*  
36-inch – 35 $\frac{3}{4}$ " w x 83 $\frac{1}{8}$ " h x 24" d\*

## Base Unit + Panel Kit = Finished Refrigerator

Easily transform these overlay refrigerators into one of our signature kitchen suite designs with one of our suite-coordinating stainless steel panel kits. To do so, you must order one of the overlay base units (left column) and one of the suite-coordinating panel kits. The kits include refrigerator and freezer door panels, air grille and pre-installed handles.

Coordinating Stainless Panel Kits		
Base Unit Model Number	Pro-Style® Stainless	Euro-Style Stainless
Side-by-Side <b>JS48NFXDE</b> <b>JS42NFXDE</b>	JPK48SNXEPS JPK42SNXEPS	JPK48SNXESS JPK42SNXESS
French Door <b>JF42NFXDE</b> <b>JF36NFXDE</b>	JPK42FNXEPS JPK36FNXEPS	JPK42FNXESS JPK36FNXESS
Bottom-Freezer <b>JB36NFXRE</b> <b>JB36NFXLE</b>	JPK36BNXEPS**	JPK36BNXESS**

\* Depth is to front of raw doors, excluding panel kit or custom panels.

\* Depth is to front of raw doors, excluding panel kit or custom panels. \*\* Panel kits are reversible to fit right- or left-hand door swing models.



Overall Product Dimensions  
48-inch – 48<sup>3</sup>/<sub>8</sub>" w x 83<sup>3</sup>/<sub>8</sub>" h x 27<sup>3</sup>/<sub>4</sub>" d\*  
42-inch – 42<sup>3</sup>/<sub>8</sub>" w x 83<sup>3</sup>/<sub>8</sub>" h x 27<sup>3</sup>/<sub>4</sub>" d\*

### 48"/42" Pro-Style® Side-by-Side Refrigerator with Ice & Water Dispenser

**JS48PPDUDE** – 48"

**JS42PPDUDE** – 42"

- Industry-exclusive Obsidian interior with metal accents
- Precision Temperature Management™ system with variable-speed compressor
- Advanced Climate Control drawer
- Integrated cubed/crushed ice and water dispenser

#### Style Option



Pro-Style® Stainless



Overall Product Dimensions  
48-inch – 48<sup>3</sup>/<sub>8</sub>" w x 83<sup>3</sup>/<sub>8</sub>" h x 27<sup>1</sup>/<sub>8</sub>" d\*  
42-inch – 42<sup>3</sup>/<sub>8</sub>" w x 83<sup>3</sup>/<sub>8</sub>" h x 27<sup>1</sup>/<sub>8</sub>" d\*

### 48"/42" Euro-Style Side-by-Side Refrigerator with Ice & Water Dispenser

**JS48SSDUDE** – 48"

**JS42SSDUDE** – 42"

- Industry-exclusive Obsidian interior with metal accents
- Precision Temperature Management™ system with variable-speed compressor
- Advanced Climate Control drawer
- Integrated cubed/crushed ice and water dispenser

#### Style Option



Euro-Style® Stainless



#### Custom Storage for Your Fresh Ingredients

The Advanced Climate Control drawer features easy-to-use controls that allow precise, independent temperature control of specific food categories. On non-dispensing models, this feature controls the upper crisper drawer (shown left). Dispensing models have this feature on the deli drawer above the crisper (not shown).

\* Depth includes handles.



#### Complete Your Entertaining Center with an Automatic Ice Machine

By adding an automatic ice machine to your kitchen, you're assured of being able to have up to 50 pounds of clear ice available every 24 hours.\*\* Ice machines fit within our Euro-Style Stainless kitchen suite or accommodate a Pro-Style® handle kit. See page 151 for more details.

\* Depth includes handles. \*\* With the Max Ice option selected.

## Fully Integrated Built-In Side-by-Side Refrigerators



## Armoire-Style Door Panel Kit

**W10663565** – 48" – Obsidian Interior**W10663564** – 42" – Obsidian Interior**W10663562** – 36" – Obsidian Interior

- For use with fully integrated and flush refrigerators
- Enables installation and proper venting of full-height custom door panels (not included) that hide the top panel
- Includes grille trim and air divider



## Pro-Style® Stainless Handle Kit

**W10250643** – Side-by-Side**W10250642** – 42" French Door**W10745429** – 36" French Door**W10250641** – Bottom-Freezer

- For use with Custom Overlay fully integrated built-in refrigerators



## Euro-Style Stainless Handle Kit

**W10250640** – Side-by-Side**W10250639** – 42" French Door**W10745430** – 36" French Door**W10250638** – Bottom-Freezer

- For use with Custom Overlay fully integrated built-in refrigerators

EveryDrop™ Filter  
Replacement Filter Cartridge**EDR3RXD1**

- For use with built-in refrigerators with external dispenser or internal ice maker
- Replace every 6 months for optimal performance

	48"	42"
MODEL #	JS48NFXDDE	JS42NFXDDE
Overall Product Dimensions – w x h x d (in) <sup>A</sup>	47 3/4 x 83 1/8 x 24	41 3/4 x 83 1/8 x 24
Opening/Clearance Dimensions – w x h x d (in) – Standard Flush (new installation)	48 x 84 x 25	42 x 84 x 25
Opening/Clearance Dimensions – w x h x d (in) – Retrofit Installation	48 x 84 x 24	42 x 84 x 24
Approximate Shipping Weight (lb)	649	602
Volts/Amps Required	115/15-20	115/15-20
SPECIFICATIONS		
Total Volume (cu. ft. AHAM)	29.2	25.6
Refrigerator Compartment Volume (cu. ft. AHAM)	18.7	16.4
Freezer Compartment Volume (cu. ft. AHAM)	10.5	9.2
Kilowatt Hours per Year	822	774
PERFORMANCE FEATURES		
Precision Temperature Management™ System with Variable-Speed Compressor	■	■
Capacitive Touch Controls with LED Display	■	■
Pulsed Defrost	■	■
Quiet Operation	■	■
Sabbath Mode with Star-K Certification	■	■
CONTROL FEATURES		
Max Cold	■	■
Over Temp Alarm	■	■
Door Open Alarm	■	■
Water Filter Indicator and Reset	■	■
REFRIGERATOR FEATURES		
Produce Preserver	■	■
Advanced Climate Control Drawer	■	■
Soft, Auto-Close Crisper Drawers	2	2
Gallon Door Storage Bin	■	■
Adjustable Elegance Shelving	■	■
Adjustable Door Bins with Metal Accents	4	4
FREEZER FEATURES		
Automatic Ice Maker with Storage Bin	■	■
Adjustable Shelf	1	1
Removable Shelf	1	1
Fixed Shelves	2	2
Adjustable Door Bins	5	5
OPTIONAL ACCESSORIES		
Coordinating Stainless Panel Kits (add to base unit JS48NFXDDE or JS42NFXDDE)		
Pro-Style® Stainless	JPK48SNXEPS	JPK42SNXEPS
Euro-Style Stainless	JPK48SNXESS	JPK42SNXESS
Handle Kits (for use with custom panel applications)		
Pro-Style® Stainless Handles with Diamond Etching	W10250643	W10250643
Euro-Style Stainless Handles	W10250640	W10250640
Armoire-Style Door Panel Kit	W10663565	W10663564
Produce Preserver Keep Fresh Packet Refill	P1KC6R1	P1KC6R1
EveryDrop™ Filter by Whirlpool Water (Replacement Filter Cartridge)	EDR3RXD1	EDR3RXD1
DESIGN FEATURES		
Obsidian Interior Finish with Interior Metal Accents	■	■
Fully Integrated and Flush Design	■	■
Multi-Point LED Theater Lighting	■	■
Removable Base-Grille Water Filter	■	■
Custom Overlay Design (requires coordinating stainless panel kit or custom panels and handles, not included)	■	■

A. Depth is to front of raw doors, excluding panel kit or custom panels.

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to installation instructions packaged with product *before* selecting cabinetry, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

## Fully Integrated Built-In Bottom-Freezer Refrigerators

	FRENCH DOOR		BOTTOM-FREEZER	
	42"	36"	36"	
<b>MODEL #</b>	<b>JF42NFXDE</b>	<b>JF36NFXDE</b>	<b>JB36NFXRE</b>	<b>JB36NFXLE</b>
Overall Product Dimensions – w x h x d (in) <sup>A</sup>	41 <sup>3</sup> / <sub>4</sub> x 83 <sup>1</sup> / <sub>8</sub> x 24	35 <sup>3</sup> / <sub>4</sub> x 83 <sup>1</sup> / <sub>8</sub> x 24	35 <sup>3</sup> / <sub>4</sub> x 83 <sup>1</sup> / <sub>8</sub> x 24	35 <sup>3</sup> / <sub>4</sub> x 83 <sup>1</sup> / <sub>8</sub> x 24
Opening/Clearance Dimensions – w x h x d (in) – Standard Flush (new installation)	42 x 84 x 25	36 x 84 x 25	36 x 84 x 25	36 x 84 x 25
Opening/Clearance Dimensions – w x h x d (in) – Retrofit Installations	42 x 84 x 24	36 x 84 x 24	36 x 84 x 24	36 x 84 x 24
Approximate Shipping Weight (lb)	638	560	560	560
Volts/Amps Required	115/15-20	115/15-20	115/15-20	115/15-20
<b>SPECIFICATIONS</b>				
Total Volume (cu. ft. AHAM)	24.2	20.8	20.9	20.9
Refrigerator Compartment Volume (cu. ft. AHAM)	17.8	15.2	15.3	15.3
Freezer Compartment Volume (cu. ft. AHAM)	6.4	5.6	5.6	5.6
Kilowatt Hours per Year	694	656	599	599
ENERGY STAR® Qualified <sup>B</sup>	—	—	■	■
<b>PERFORMANCE FEATURES</b>				
Twin Fresh™ Climate Control System with Sequential Dual Evaporators	■	■	■	■
Variable Capacity Compressor	■	■	■	■
Light-Guided Touch Controls with LED display	■	■	■	■
Pulsed Defrost	■	■	■	■
Quiet Operation	■	■	■	■
Sabbath Mode with Star-K Certification	■	■	■	■
FreshFlow™ Air Filter	■	■	■	■
<b>CONTROL FEATURES</b>				
Max Cool Option	■	■	■	■
Max Ice Option	■	■	■	■
Door Open Alarm	■	■	■	■
Water Filter Indicator and Reset	■	■	■	■
<b>REFRIGERATOR FEATURES</b>				
Produce Preserver	■	■	■	■
Soft, Auto-Close Crisper Drawers	■	■	■	■
Gallon Door Storage Bin	2	2	1 (full-width)	1 (full-width)
Adjustable Elegance Shelving	■	■	■	■
Adjustable Door Bins	4	4	4	4
<b>FREEZER FEATURES</b>				
2-Tier, Glide-Out Drawer	■	■	■	■
Automatic Ice Maker with Removable Storage Drawer	■	■	■	■
<b>OPTIONAL ACCESSORIES</b>				
Coordinating Stainless Panel Kits (add to base unit JF42NFXDE, JF36NFXDE, JB36NFXRE or JB36NFXLE)				
Pro-Style® Stainless	JKP42FNXEPS	JKP36FNXEPS	JKP36BNXEPS <sup>C</sup>	JKP36BNXEPS <sup>C</sup>
Euro-Style Stainless	JKP42FNXESS	JKP36FNXESS	JKP36BNXESS	JKP36BNXESS
Handle Kits (for use with custom panel applications)				
Pro-Style® Stainless Handles with Diamond Etching	W10250642	W10745429	W10250641	W10250641
Euro-Style Stainless Handles	W10250639	W10745430	W10250638	W10250638
Produce Preserver Keep Fresh Packet Refill	P1KC6R1	P1KC6R1	P1KC6R1	P1KC6R1
FreshFlow™ Air Filter Refill	W10311524	W10311524	W10311524	W10311524
Armoire-Style Door Panel Kit	W10663564	W10663562	W10663562	W10663562
EveryDrop™ Filter by Whirlpool Water (Replacement Filter Cartridge)	EDR3RXD1	EDR3RXD1	EDR3RXD1	EDR3RXD1
<b>DESIGN FEATURES</b>				
Obsidian Interior Finish with Interior Metal Accents	■	■	■	■
Fully Integrated and Flush Design	■	■	■	■
Multi-Point LED Theater Lighting	■	■	■	■
Removable Base-Grille Water Filter	■	■	■	■
Custom Overlay Design (requires coordinating stainless panel kit or custom panels and handles, not included)	■	■	■	■

A. Depth is to front of raw doors, excluding panel kit or custom panels.

B. Per energy specifications, effective 9/15/2014. ©ENERGY STAR is a U.S. registered mark.

C. Panel kits are reversible to fit right- or left-hand door swing models.

## Built-In Side-by-Side Refrigerators with Ice & Water Dispenser

MODEL #	48"		42"	
	JS48PPDUDE	JS48SSDUDE	JS42PPDUDE	JS42SSDUDE
Overall Product Dimensions – w x h x d (in) <sup>A</sup>	48 <sup>3</sup> / <sub>8</sub> x 83 <sup>3</sup> / <sub>8</sub> x 27 <sup>3</sup> / <sub>4</sub>	48 <sup>3</sup> / <sub>8</sub> x 83 <sup>3</sup> / <sub>8</sub> x 27 <sup>1</sup> / <sub>8</sub>	42 <sup>3</sup> / <sub>8</sub> x 83 <sup>3</sup> / <sub>8</sub> x 27 <sup>3</sup> / <sub>4</sub>	42 <sup>3</sup> / <sub>8</sub> x 83 <sup>3</sup> / <sub>8</sub> x 27 <sup>1</sup> / <sub>8</sub>
Opening/Clearance Dimensions – w x h x d (in)	47 <sup>1</sup> / <sub>2</sub> x 84 x 24	47 <sup>1</sup> / <sub>2</sub> x 84 x 24	41 <sup>1</sup> / <sub>2</sub> x 84 x 24	41 <sup>1</sup> / <sub>2</sub> x 84 x 24
Approximate Shipping Weight (lb)	682	682	637	637
Volts/Amps Required	115/15-20	115/15-20	115/15-20	115/15-20
<b>SPECIFICATIONS</b>				
Total Volume (cu. ft. AHAM)	29.5	29.5	25.0	25.0
Refrigerator Compartment Volume (cu. ft. AHAM)	19.2	19.2	16.4	16.4
Freezer Compartment Volume (cu. ft. AHAM)	10.3	10.3	8.6	8.6
Kilowatt Hours per Year	805	805	752	752
ENERGY STAR® Qualified <sup>B</sup>	■	■	■	■
<b>PERFORMANCE FEATURES</b>				
Precision Temperature Management™ System with Variable-Speed Compressor	■	■	■	■
Capacitive Touch Controls with LED Display	■	■	■	■
QuickMeasure Function	■	■	■	■
Pulsed Defrost	■	■	■	■
Sabbath Mode with Star-K Certification	■	■	■	■
<b>CONTROL FEATURES</b>				
Max Cold	■	■	■	■
Over Temp Alarm	■	■	■	■
Door Open Alarm	■	■	■	■
Water Filter Indicator and Reset	■	■	■	■
Call Service Indicator	■	■	■	■
<b>REFRIGERATOR FEATURES</b>				
Produce Preserver	■	■	■	■
Advanced Climate Control Drawer	■	■	■	■
Soft, Auto-Close Crisper Drawers	2	2	2	2
Gallon Door Storage Bin	■	■	■	■
Adjustable Elegance Shelving	4	4	4	4
Adjustable Door Bins	4	4	4	4
<b>FREEZER FEATURES</b>				
Door-Mounted Ice Dispenser with Removable Bin	■	■	■	■
Automatic Ice Maker	■	■	■	■
Adjustable Shelves	4	4	4	4
Removable Shelves	1	1	1	1
Fixed Shelves	1	1	1	1
Adjustable Door Bins	3	3	3	3
<b>OPTIONAL ACCESSORIES</b>				
Produce Preserver Keep Fresh Packet Refill	P1KC6R1	P1KC6R1	P1KC6R1	P1KC6R1
EveryDrop™ Filter by Whirlpool Water (Replacement Filter Cartridge)	EDR3RXD1	EDR3RXD1	EDR3RXD1	EDR3RXD1
<b>DESIGN FEATURES</b>				
Obsidian Interior Finish with Interior Metal Accents	■	■	■	■
Multi-Point LED Theater Lighting	■	■	■	■
Removable Base-Grille Water Filter	■	■	■	■
Integrated Cubed/Crushed Ice and Water Dispenser	■	■	■	■
Style Options				
Pro-Style® Stainless <sup>C</sup>	■	—	■	—
Euro-Style Stainless <sup>D</sup>	—	■	—	■

A. Depth includes handles.

B. Per energy specifications, effective 9/15/2014. ©ENERGY STAR is a U.S. registered mark.

C. Includes stainless steel handles with diamond etching.


D. Includes slightly curved, stainless steel handles.

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to installation instructions packaged with product *before* selecting cabinetry, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

## **FREESTANDING REFRIGERATORS** SHOWCASING GREAT TASTE

A Jenn-Air® freestanding refrigerator puts design into focus in refreshing ways. Side-by-side, traditional French door and four-door French door configurations give options for storing food in a way that fits any lifestyle. Counter-depth models, meaning refrigerators where only the doors and handles will extend beyond the base cabinet, create an integrated design that more closely approximates a built-in look.

Select freestanding refrigerators now feature our industry-exclusive **Obsidian interior finish**. This signature feature showcases food items throughout the refrigerator and provides a sharper contrast than white interiors. **WiFi connectivity** allows monitoring and adjustment of basic refrigerator functions through a mobile app.

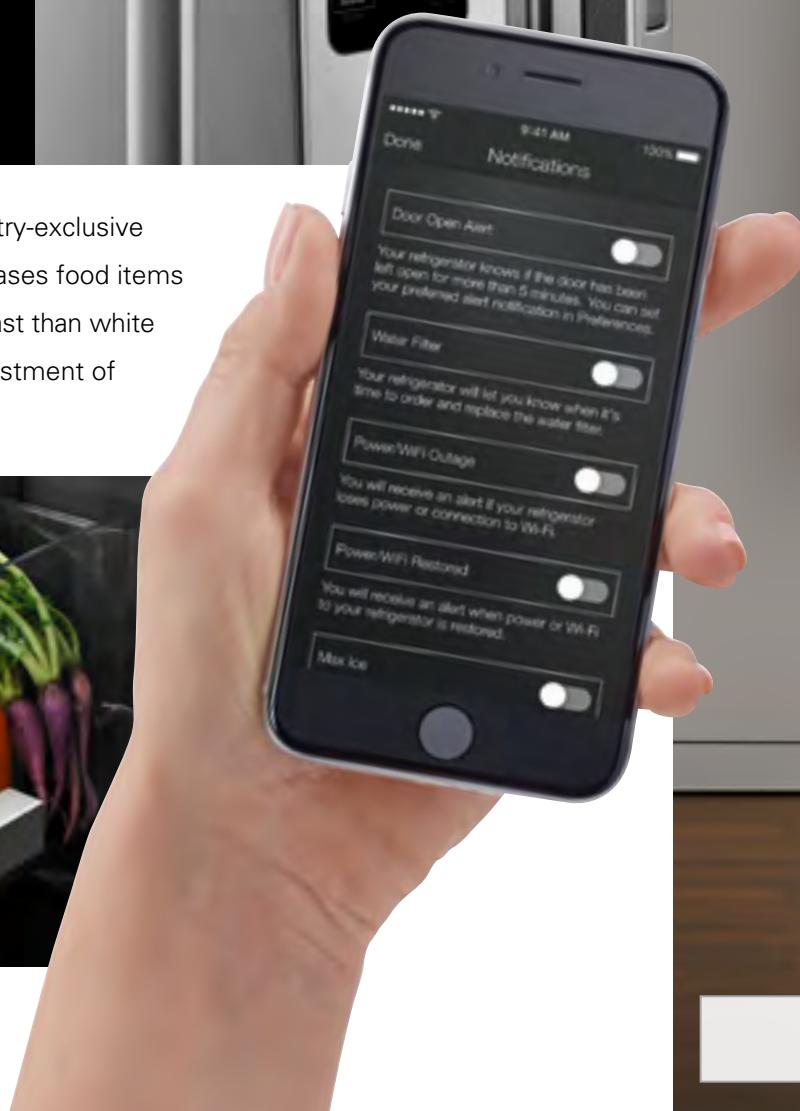

Among our freestanding refrigerators, select models, including connected refrigerators, feature the **Twin Fresh™ climate control system**. Two independent cooling systems keep humidity at optimum levels, so refrigerated food retains humidity to keep produce fresh while the freezer remains cold and dry to help prevent freezer burn.



### 72" Counter-Depth French Door Refrigerator with Ice & Water Dispenser

**JFFCC72EF** – 72" Style Options\*: P, S

- 72-inch counter-depth design
- Industry-exclusive Obsidian interior with metal accents
- Twin Fresh™ climate control system with sequential dual evaporators
- WiFi connectivity
- Interior LED theater lighting



#### Style Options\*



**P** Pro-Style®  
Stainless



**S** Euro-Style  
Stainless

Overall Product Dimensions  
JFFCC72EF – 35<sup>3</sup>/<sub>4</sub>" w x 71<sup>15</sup>/<sub>16</sub>" h x 31<sup>1</sup>/<sub>4</sub>" d\*\*



### 72" Counter-Depth French Door Refrigerator with Internal Water Dispenser

**JFC2290RE** – 72" Style Options\*: P, M, Y

**JFC2290RT** – 72" Custom Overlay Design: B – Does not include custom panels or handles

- 72-inch counter-depth design
- TriSensor™ electronic climate control
- One-hand internal water dispenser
- Glide-out freezer drawer with triple-tiered storage and SmoothClose™ drawer track system

#### JFC2290RE Style Options\*



**P** Pro-Style®  
Stainless



**M** Euro-Style  
Stainless



**Y** Black  
Floating  
Glass

Overall Product Dimensions  
JFC2290RE – 35<sup>5</sup>/<sub>8</sub>" w x 71<sup>7</sup>/<sub>8</sub>" h x 29<sup>5</sup>/<sub>8</sub>" d\*\*  
JFC2290RT – 35<sup>5</sup>/<sub>8</sub>" w x 71<sup>7</sup>/<sub>8</sub>" h x 28<sup>1</sup>/<sub>8</sub>" d†

#### JFC2290RT Custom Overlay Design

Requires custom panels and handles, not included.

Custom panels and handles must be ordered separately from a cabinet maker or other manufacturer.



**B** Custom Overlay Design



#### Add Supplemental Refrigeration Where You Need It

Built-in, flush installation for Jenn-Air® under counter refrigerators adds a stylish option and sophisticated convenience to any room of your home. Use the extra storage as a prep area for foods waiting to be cooked or to store beverages and refreshments in a home theater. Options include double-refrigerator and refrigerator/freezer drawer configurations as well as a refrigerator, beverage center or wine cellar. See pages 148-150 for more details.



#### One-Hand Internal Water Dispenser

The design of this dispenser features a touch pad that allows you to use it with one hand. This creates convenient access to fresh, filtered water while maintaining the refrigerator's sleek, uninterrupted exterior.

\* For cabinet color, see page 141 (JFFCC72EF) \*\* Depth includes handles. For Pro-Style® Stainless model JFFCC72EF, d = 31<sup>15</sup>/<sub>16</sub>.

\* For cabinet color, see page 142. \*\* Depth includes handles. For Pro-Style® Stainless model JFC2290REP, d = 30<sup>1</sup>/<sub>4</sub>"

† Depth does not include custom panels and handles.

## 69" Counter-Depth French Door Refrigerator with Internal Water Dispenser

**JFC2089BE** – 69" Style Options\*: P, M

- 69-inch counter-depth design
- TriSensor™ electronic climate control
- Internal water dispenser
- Glide-out freezer drawer with two-tiered storage and SmoothClose™ drawer track system
- Contoured door with hidden hinges

### Style Options\*



**P** Pro-Style®  
Stainless



**M** Euro-Style®  
Stainless

Overall Product Dimensions  
35<sup>5/8</sup>" w x 70<sup>1/8</sup>" h x 29<sup>7/8</sup>" d\*\*



Overall Product Dimensions  
35<sup>5/8</sup>" w x 70<sup>1/8</sup>" h x 35<sup>7/16</sup>" d\*\*

## 69" Standard-Depth French Door Refrigerator with Ice & Water Dispenser

**JFX2897DR** – 69" Style Options\*: P, M

- Twin Fresh™ climate control system with sequential dual evaporators
- Glide-out refrigerator drawer with adjustable temperature control
- Single-paddle cubed/crushed ice-and-water dispenser
- Ramp-up LED theater lighting with undershelf LED lighting
- Contoured door with hidden hinges

### Style Options\*



**P** Pro-Style®  
Stainless



**M** Euro-Style®  
Stainless



## 72" Counter-Depth Side-by-Side Refrigerator with Ice & Water Dispenser

**JSC23C9EE** – 72" Style Option\*: M

- 72-inch counter-depth design
- Twin Fresh™ climate control system with sequential dual evaporators
- Single-paddle cubed/crushed ice-and-water dispenser
- Ramp-up LED theater lighting and metal trim on door bins

### Style Option\*



**M** Euro-Style®  
Stainless

Overall Product Dimensions  
35<sup>3/4</sup>" w x 71<sup>3/8</sup>" h x 29<sup>1/2</sup>" d\*\*



Pro-Style® Stainless Handle Kit  
W10214147A (see page 140)



## Door-Mounted Ice Dispenser with Removable Bin

The door-mounted ice dispenser is an ideal feature for those who love to entertain. Its in-the-door location gives you easy access to large quantities of fresh, filtered ice, while increasing usable storage space. The removable bin features a handle and flat bottom, making it easy to serve guests.



## Single-Paddle Cubed/Crushed Ice & Water Dispenser

Capacitive-touch controls make it easy to select cubed ice, crushed ice or chilled water. The Measured Fill feature dispenses water in precise amounts of ounces, cups or liters. And the dispenser has the same ramp-up lighting found inside the refrigerator.

\* For cabinet color, see page 143 (JFC2089BE) or page 144 (JSC23C9EE). \*\* Depth includes handles. For Pro-Style® Stainless model JFC2089BEP, d = 30<sup>1/2</sup>.

\* For cabinet color, see page 145. \*\* Depth includes handles.

## Freestanding Counter-Depth French Door Refrigerators (Ice &amp; Water Dispenser)



## Pro-Style® Stainless Handle Kit

**W10214147A**

- For use with model JSC23C9EE



## EveryDrop™ Filter Replacement Filter Cartridge

**EDR4RXD1**

- For use with most freestanding counter-depth French door refrigerators
- Replace every 6 months for optimal performance



## EveryDrop™ Filter Replacement Filter Cartridge

**EDR2RXD1**

- For use with model JFX2897DR
- Replace every 6 months for optimal performance



## EveryDrop™ Filter Replacement Filter Cartridge

**EDR1RXD1**

- For use with model JSC23C9EE
- Replace every 6 months for optimal performance

MODEL #	<b>JFFCC72EF</b>
Overall Product Dimensions – w x h x d (in) <sup>a</sup>	35 <sup>3/4</sup> x 71 <sup>15/16</sup> x 31 <sup>1/4</sup>
Opening/Clearance Dimensions – w x h x d (in)	36 <sup>3/4</sup> x 72 <sup>7/16</sup> x 24
Approximate Shipping Weight (lb)	375
Volts/Amps Required	120/15-20
<b>SPECIFICATIONS</b>	
Total Volume (cu. ft. AHAM)	23.8
Refrigerator Compartment Volume (cu. ft. AHAM)	17.5
Freezer Compartment Volume (cu. ft. AHAM)	6.3
Kilowatt Hours per Year	739
<b>PERFORMANCE FEATURES</b>	
Twin Fresh™ Climate Control System with Sequential Dual Evaporators	■
Integrated Electronic Controls with LED Display	■
Measured Fill	■
Favorite Fill	■
Max Cool Option	■
Max Ice Option	■
Removable EveryDrop™ Filter by Whirlpool Water	■
WiFi Connectivity	■
<b>REFRIGERATOR FEATURES</b>	
Electronic Temperature-Controlled Pantry Drawer	■
Humidiseal™ Crisper Drawers	■
Herb Tender™ Container	■
Fold-Away Glass Shelf	■
Adjustable, Clear Glass Shelves	■
Adjustable Door Bins with Metal Accents	■
Gallon Door Storage Bins	■
Pull-Out Platter	■
Undershelf Wine Bottle Rack	■
In-Door-Ice Storage Bin	■
Interior LED Theater Lighting	■
<b>FREEZER FEATURES</b>	
Glide-Out Freezer Drawer with Premium Glide System	■
Pure Freeze™ Mode	■
Automatic Ice Maker	■
<b>OPTIONAL ACCESSORIES</b>	
Produce Preserver Starter Kit	P1KL6S1CS
Produce Preserver Keep Fresh Packet Refill	P1KC6R1
Herb Tender™ Container	W10882409
EveryDrop™ Filter by Whirlpool Water (Replacement Filter Cartridge)	EDR2RXD1
<b>DESIGN FEATURES</b>	
72-Inch Counter-Depth Design	■
Obsidian Interior	■
Soft, Auto-Close Technology	■
Integrated Cubed/Crushed Ice and Water Dispenser	■
Style Options (add letter to end of model number)	
Pro-Style® Stainless with Black Cabinet <sup>b</sup>	P
Euro-Style Stainless with Black Cabinet <sup>c</sup>	S

A. Depth includes handles.  
B. Includes stainless steel handles with diamond etching.  
C. Includes slightly curved, stainless steel handles.

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to installation instructions packaged with product *before* selecting cabinetry, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

## Freestanding Counter-Depth French Door Refrigerators (Internal Water Dispenser)

MODEL #	JFC2290RE	JFC2290RT
Overall Product Dimensions – w x h x d (in) <sup>A</sup>	35 <sup>5</sup> / <sub>8</sub> x 71 <sup>7</sup> / <sub>8</sub> x 29 <sup>5</sup> / <sub>8</sub>	35 <sup>5</sup> / <sub>8</sub> x 71 <sup>7</sup> / <sub>8</sub> x 28 <sup>1</sup> / <sub>8</sub>
Opening/Clearance Dimensions – w x h x d (in)	36 <sup>5</sup> / <sub>8</sub> x 71 <sup>7</sup> / <sub>8</sub> x 24	36 <sup>5</sup> / <sub>8</sub> x 71 <sup>7</sup> / <sub>8</sub> x 24
Approximate Shipping Weight (lb)	360	360
Volts/Amps Required	115/15-20	115/15-20
<b>SPECIFICATIONS</b>		
Total Volume (cu. ft. AHAM)	21.9	21.9
Refrigerator Compartment Volume (cu. ft. AHAM)	16.3	16.3
Freezer Compartment Volume (cu. ft. AHAM)	5.6	5.6
Kilowatt Hours per Year	633	633
<b>PERFORMANCE FEATURES</b>		
TriSensor™ Electronic Climate Control	■	■
Electronic Controls with LED Display	■	■
Automatic Moisture Control	■	■
Automatic Adaptive Defrost	■	■
Max Cold	■	■
Sabbath Mode with Star-K Certification	■	■
<b>REFRIGERATOR FEATURES</b>		
One-Hand Internal Water Dispenser	■	■
Sealed Crisper Drawers with Adjustable Humidity Control	2	2
Produce Preserver	■	■
Temperature-Controlled Gourmet Bay™ Drawer with Self-Opening Lid	■	■
Adjustable Glass Shelves with Spill Shield Technology	4	4
Undershelf Wine Bottle Rack	■	■
Covered Dairy Compartment	■	■
Adjustable Door Bins	5	5
Gallon Door Storage	■	■
Interior LED Lighting	2	2
<b>FREEZER FEATURES</b>		
Automatic Ice Maker with Storage Bin and Ice Scoop	■	■
Glide-Out Drawer with SmoothClose™ Drawer Track System	■	■
3-Tier Freezer Drawer	■	■
Interior LED Lighting	■	■
<b>OPTIONAL ACCESSORIES</b>		
Produce Preserver Keep Fresh Packet Refill	P1KC6R1	P1KC6R1
EveryDrop™ Filter by Whirlpool Water (Replacement Filter Cartridge)	EDR4RXD1	EDR4RXD1
<b>DESIGN FEATURES</b>		
72-Inch Counter-Depth Design	■	■
2-Point Front Leveling	■	■
Style Options (add letter to end of model number)		
Pro-Style® Stainless with Apollo Grey Cabinet <sup>B</sup>	P	—
Euro-Style Stainless with Apollo Grey Cabinet <sup>C</sup>	M	—
Black Floating Glass with Black Cabinet <sup>D</sup>	Y	—
Custom Overlay Design with Black Cabinet and Trim <sup>E</sup>	—	B

A. Depth includes handles. Depth on model JFC2290RT does not include custom panels and handles.

B. Includes stainless steel handles with diamond etching.

C. Includes slightly curved, stainless steel handles.

D. Includes slightly curved, color-coordinating handles.

E. Requires custom panels and handles, not included.

## Freestanding Counter-Depth French Door Refrigerators (Internal Water Dispenser)

MODEL #	JFC2089BE
Overall Product Dimensions – w x h x d (in) <sup>A</sup>	35 <sup>5</sup> / <sub>8</sub> x 70 <sup>1</sup> / <sub>8</sub> x 29 <sup>7</sup> / <sub>8</sub>
Opening/Clearance Dimensions – w x h x d (in)	36 <sup>5</sup> / <sub>8</sub> x 70 <sup>1</sup> / <sub>4</sub> x 24
Approximate Shipping Weight (lb)	350
Volts/Amps Required	115/15-20
<b>SPECIFICATIONS</b>	
Total Volume (cu. ft. AHAM)	20.0
Refrigerator Compartment Volume (cu. ft. AHAM)	14.4
Freezer Compartment Volume (cu. ft. AHAM)	5.6
Kilowatt Hours per Year	563
ENERGY STAR® Qualified <sup>B</sup>	■
<b>PERFORMANCE FEATURES</b>	
TriSensor™ Electronic Climate Control	■
Electronic Controls with LED Display	■
Automatic Adaptive Defrost	■
Max Cool	■
Max Ice	■
EveryDrop™ Filter by Whirlpool Water	■
<b>REFRIGERATOR FEATURES</b>	
Internal Water Dispenser	■
Sealed Crisper Drawers with Adjustable Humidity Control	2
Produce Preserver	■
Temperature-Controlled Gourmet Bay™ Drawer with Self-Opening Lid and Wine Hold	■
Adjustable Glass Shelves with Spill Shield Technology	■
Adjustable Storage Rack	■
Covered Dairy Compartment	■
Adjustable, Lift-Off Door Bins	■
Gallon Door Storage	■
Covered LED Lighting	■
<b>FREEZER FEATURES</b>	
Automatic Ice Maker with Storage Bin	■
Glide-Out Drawer with SmoothClose™ Drawer Track System	■
2-Tier Freezer Drawer	■
Stability-Enhanced Freezer Basket	■
Interior Lighting	■
<b>OPTIONAL ACCESSORIES</b>	
Produce Preserver Keep Fresh Packet Refill	P1KC6R1
EveryDrop™ Filter by Whirlpool Water (Replacement Filter Cartridge)	EDR4RXD1
<b>DESIGN FEATURES</b>	
69-Inch Counter-Depth Design	■
Contoured Door	■
2-Point Front Leveling	■
Style Options (add letter to end of model number)	
Pro-Style® Stainless with Apollo Grey Cabinet <sup>C</sup>	P
Euro-Style Stainless with Apollo Grey Cabinet <sup>D</sup>	M

A. Depth includes handles.

B. Per energy specifications, effective 9/15/2014. ©ENERGY STAR is a U.S. registered mark.

C. Includes stainless steel handles with diamond etching.

D. Includes slightly curved, stainless steel handles.

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to installation instructions packaged with product *before* selecting cabinetry, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

## Freestanding Counter-Depth Side-By-Side Refrigerator (Ice & Water Dispenser)

MODEL #	JSC23C9EE
Overall Product Dimensions – w x h x d (in) <sup>a</sup>	35 $\frac{3}{4}$ x 71 $\frac{3}{8}$ x 29 $\frac{1}{2}$
Opening/Clearance Dimensions – w x h x d (in)	36 $\frac{1}{2}$ x 72 x 24
Approximate Shipping Weight (lb)	360
Volts/Amps Required	115/15-20
<b>SPECIFICATIONS</b>	
Total Volume (cu. ft. AHAM)	22.7
Refrigerator Compartment Volume (cu. ft. AHAM)	13.7
Freezer Compartment Volume (cu. ft. AHAM)	9.0
Kilowatt Hours per Year	685
<b>PERFORMANCE FEATURES</b>	
Twin Fresh™ Climate Control System with Sequential Dual Evaporators	■
Light-Touch Electronic Controls	■
Automatic Adaptive Defrost	■
FreshFlow™ Air Filter	■
EveryDrop™ Filter by Whirlpool Water	■
Max Cold	■
Speed Ice	■
<b>REFRIGERATOR FEATURES</b>	
Sealed Humidity-Controlled Crisper Drawers	2
Deli Drawer	■
Produce Preserver	■
Elegance Glass Shelves with Spill Shield Technology	3
Adjustable Lift-Off Door Bins with Metal Trim	3
Gallon Door Storage	■
Ramp-Up LED Theater Lighting	■
Undershelf Wine Bottle Rack	■
<b>FREEZER FEATURES</b>	
Automatic Ice Maker	■
Removable Door-Mounted Ice Bin	■
Ramp-Up LED Theater Lighting	3
<b>OPTIONAL ACCESSORIES</b>	
FreshFlow™ Air Filter Replacement Filter	W10311524
Produce Preserver Keep Fresh Packet Refill	P1KC6R1
EveryDrop™ Filter by Whirlpool Water (Replacement Filter Cartridge)	EDR1RXD1
Pro-Style® Stainless Handle Kit	W10214147A
<b>DESIGN FEATURES</b>	
Elegance Interior Design	■
72-Inch Counter-Depth Design	■
Single-Paddle Cubed/Crushed Ice and Water Dispenser	■
Removable Base-Grille Water Filter	■
2-Point Front Leveling	■
Style Option (add letter to end of model number) Euro-Style Stainless with Apollo Grey Cabinet <sup>b</sup>	M

A. Depth includes handles.  
B. Includes slightly curved, stainless steel handles.

## Freestanding Standard-Depth French Door Refrigerator (Ice & Water Dispenser)

MODEL #	JFX2897DR
Overall Product Dimensions – w x h x d (in) <sup>a</sup>	35 $\frac{5}{8}$ x 70 $\frac{1}{8}$ x 37 $\frac{7}{16}$
Opening/Clearance Dimensions – w x h x d (in)	36 $\frac{7}{8}$ x 70 $\frac{1}{8}$ x 24
Approximate Shipping Weight (lb)	375
Volts/Amps Required	120/15
<b>SPECIFICATIONS</b>	
Total Volume (cu. ft. AHAM)	26.2
Refrigerator Compartment Volume (cu. ft. AHAM)	18.4
Freezer Compartment Volume (cu. ft. AHAM)	7.8
Kilowatt Hours per Year	772
<b>PERFORMANCE FEATURES</b>	
Twin Fresh™ Climate Control System with Sequential Dual Evaporators	■
Capacitive Touch Controls	■
Automatic Adaptive Defrost	■
FreshFlow™ Air Filter	■
Measured Fill	■
Fast Ice	■
Vacation Mode	■
EveryDrop™ Filter by Whirlpool Water	■
<b>REFRIGERATOR FEATURES</b>	
Single-Paddle Dispenser	■
3 Crisper Drawers	■
Produce Preserver	■
Ingredients Bay	■
Adjustable Glass Shelves with Spill Shield Technology	■
Fold-Away Glass Shelves	2
Adjustable Door Bins with Metallic Trim	3
Fixed Door Bin	■
Gallon Door Storage	■
Ramp-Up LED Theater Lighting	■
Undershelf LED Lighting	■
<b>REFRIGERATED DRAWER FEATURES</b>	
Glide-Out Refrigerated Drawer with Adjustable Temperature Control	■
Removable, Long Dividers	2
<b>FREEZER FEATURES</b>	
Glide-Out Drawer with SmoothClose™ Drawer Track System	■
3-Tier Freezer Drawer	■
Automatic Ice Maker	■
Removable Door-Mounted Ice Bin	■
Ramp-Up LED Theater Lighting	■
<b>OPTIONAL ACCESSORIES</b>	
FreshFlow™ Air Filter Replacement Filter	W10311524
Produce Preserver Keep Fresh Packet Refill	P1KC6R1
EveryDrop™ Filter by Whirlpool Water (Replacement Filter Cartridge)	EDR2RXD1
<b>DESIGN FEATURES</b>	
Contoured Door	■
Single-Paddle Cubed/Crushed Ice and Water Dispenser	■
2-Point Front Leveling	■
Style Options (add letter to end of model number) Pro-Style® Stainless with Apollo Grey Cabinet <sup>b</sup>	P
Euro-Style Stainless with Apollo Grey Cabinet <sup>c</sup>	M

A. Depth includes handles.  
B. Includes stainless steel handles with diamond etching.  
C. Includes slightly curved, stainless steel handles.



## UNDER COUNTER REFRIGERATION

### SHOWCASING GREAT TASTE

Today's open concept kitchens are ideal for under counter refrigeration appliances. But that's only the beginning of the opportunities. Whether inside the kitchen or in other areas of the home, Jenn-Air brand offers an under counter refrigeration solution to help homeowners relax or entertain. Choose 24-inch appliances that complement any lifestyle by organizing ingredient storage and providing extra capacity for refreshments.



Under counter beverage centers, refrigerators and wine cellars feature a Jenn-Air innovation, the multi-pivot articulating hinge, which makes it possible to achieve a **flush and seamless installation** with the cabinet's front and adjacent surfaces.




The wine cellar and beverage center feature **extendable racks with natural, beechwood tines**. The wine cellar can gently cradle and chill up to 46 bottles. The beverage center accommodates up to 14. With a design that fits into standard cabinetry, **double drawers** are a great supplement to a primary refrigerator and can replace a full-size refrigerator in small households. With space that can be efficiently organized, these models, either two refrigerators or a refrigerator/freezer, open up the kitchen and keep ingredients close at hand for a designated prep area. They're also convenient in entertainment areas, where the refrigerator/freezer can provide a steady supply of fresh, filtered ice.



## 24" Refrigerator/Freezer Drawers

### JUD24FCER

#### Style Option:




**S** Euro-Style Stainless  
(Available with Black Cabinet)

**Accessory Handles (for S style option):**  
Pro-Style® Stainless Handle Kit: W10588599\*  
Classic Stainless Tubular Handle Kit: W10701399\*

### JUD24FCEC

#### Style Option:



**X** Custom Overlay Design  
(Available with Black Cabinet)

**Accessory Handle (for X style option):**  
Euro-Style Stainless Handle Kit: W10334919\*

Requires custom panels and handles, not included. Custom panels and handles must be ordered separately from a cabinet maker or other manufacturer.

- Fully flush, built-in design
- Independent temperature zones
- Light-guided touch controls with temperature presets
- Fully extendable soft, auto-close drawers
- Automatic ice maker with water filter and replace filter indicator

Overall Product Dimensions  
JUD24FCER – 23 $\frac{7}{8}$ " w x 34 $\frac{1}{8}$ " h x 26" d\*\*  
JUD24FCEC – 23 $\frac{7}{8}$ " w x 34 $\frac{1}{8}$ " h x 23 $\frac{7}{8}$ " d†



## 24" Under Counter Glass Door Refrigerator

### JUG24FRER/JUG24FLER

#### Style Option:



**S** Euro-Style Stainless  
(Available with Black Cabinet)

**Accessory Handles (for S style option):**  
Pro-Style® Stainless Handle Kit: W10588599\*  
Classic Stainless Tubular Handle Kit: W10701399\*

### JUG24FREC/JUG24FLEC

#### Style Option:



**X** Custom Overlay Design  
(Available with Black Cabinet)

**Accessory Handle (for X style option):**  
Euro-Style Stainless Handle Kit: W10334919\*

Requires custom panel and handle, not included. Custom panel and handle must be ordered separately from a cabinet maker or other manufacturer.

- Fully flush, built-in design
- Light-guided touch controls with temperature presets
- Interior LED lighting with auto light display option
- Elegance Shelving (2 adjustable, 1 fixed)


Overall Product Dimensions  
JUG24FRER/LER – 23 $\frac{7}{8}$ " w x 34 $\frac{3}{8}$ " h x 26" d\*  
JUG24FREC/LEC – 23 $\frac{7}{8}$ " w x 34 $\frac{3}{8}$ " h x 23 $\frac{7}{8}$ " d†



## 24" Double-Refrigerator Drawers

### JUD24FRER

#### Style Option:




**S** Euro-Style Stainless  
(Available with Black Cabinet)

**Accessory Handles (for S style option):**  
Pro-Style® Stainless Handle Kit: W10588599\*  
Classic Stainless Tubular Handle Kit: W10701399\*

### JUD24FREC

#### Style Option:



**X** Custom Overlay Design  
(Available with Black Cabinet)

**Accessory Handle (for X style option):**  
Euro-Style Stainless Handle Kit: W10334919\*

Requires custom panels and handles, not included. Custom panels and handles must be ordered separately from a cabinet maker or other manufacturer.

- Fully flush, built-in design
- Independent temperature zones
- Light-guided touch controls with temperature presets
- Fully extendable soft, auto-close drawers
- Automatic ice maker with water filter and replace filter indicator

Overall Product Dimensions  
JUD24FRER – 23 $\frac{7}{8}$ " w x 34 $\frac{1}{8}$ " h x 26" d\*\*  
JUD24FREC – 23 $\frac{7}{8}$ " w x 34 $\frac{1}{8}$ " h x 23 $\frac{7}{8}$ " d†



## 24" Under Counter Solid Door Refrigerator

### JUR24FRER/JUR24FLER

#### Style Option:




**S** Euro-Style Stainless  
(Available with Black Cabinet)

**Accessory Handles (for S style option):**  
Pro-Style® Stainless Handle Kit: W10588599\*  
Classic Stainless Tubular Handle Kit: W10701399\*

### JUR24FREC/JUR24FLEC

#### Style Option:



**X** Custom Overlay Design  
(Available with Black Cabinet)

**Accessory Handle (for X style option):**  
Euro-Style Stainless Handle Kit: W10334919\*

Requires custom panel and handle, not included. Custom panel and handle must be ordered separately from a cabinet maker or other manufacturer.

- Fully flush, built-in design
- Light-guided touch controls with temperature presets
- Interior LED lighting
- Elegance Shelving (2 adjustable, 1 fixed and 2 door bins)

Overall Product Dimensions  
JUR24FRER/LER – 23 $\frac{7}{8}$ " w x 34 $\frac{3}{8}$ " h x 26" d\*  
JUR24FREC/LEC – 23 $\frac{7}{8}$ " w x 34 $\frac{3}{8}$ " h x 23 $\frac{7}{8}$ " d†



## Removable Base-Grille Water Filter

Located behind the base grille, this filter is easily replaceable without opening the drawers. It reduces chlorine taste and odor and scale buildup to provide filtered water for the automatic ice maker in the Refrigerator/Freezer.

\* Two kits are required for refrigerator/freezer drawers and double-refrigerator drawers. \*\* Depth includes handles.

† Depth does not include custom panels and/or handles.



## Wine Cellar, Beverage Center Safeguard Your Vintage Collection

Beechwood tine racks gently cradle your wine collection and roll out on ball-bearing glides. Automatic Interior LED Marquee Lighting illuminates each rack to display its full capacity.

\* Depth includes handles. † Depth does not include custom panels and/or handles.



## 24" Wine Cellar

### JUW24FRER/JUW24FLER

#### Style Option:




**S** Euro-Style Stainless  
(Available with Black Cabinet)

**Accessory Handles (for S style option):**  
Pro-Style® Stainless Handle Kit: W10588599  
Classic Stainless Tubular Handle Kit: W10701399

### JUW24FREC/JUW24FLEC

#### Style Option:



**X** Custom Overlay Design  
(Available with Black Cabinet)

**Accessory Handle (for X style option):**  
Euro-Style Stainless Handle Kit: W10334919\*

Requires custom panel and handle, not included. Custom panel and handle must be ordered separately from a cabinet maker or other manufacturer.

- Fully flush, built-in design
- Independent temperature zones
- Light-guided touch controls with temperature presets
- Interior LED marquee lighting with auto light display option
- 46 bottle capacity (6 UltraGlide soft-close racks with beechwood tines)



## 15" Ice Machine<sup>†</sup>

### JIM158XYR – Reversible Door Swing

**JIM159XYR** – Reversible Door Swing with Factory-Installed Drain Pump (Available Q4 2017)

#### Style Option:



**S** Euro-Style Stainless  
(Available with Black Cabinet)

**Accessory Handles (for S style option):**  
Pro-Style® Stainless Handle Kit: W10591217

### JIM158XYC – Reversible Door Swing

**JIM159XYC** – Reversible Door Swing with Factory-Installed Drain Pump (Available Q4 2017)

#### Style Option:



**X** Custom Overlay Design  
(Available with Black Cabinet)

Requires custom panels and handles, not included. Custom panels and handles must be ordered separately from a cabinet maker or other manufacturer.

- Replace water filter indicator
- 25 lb storage capacity
- Max Ice option (up to 50 lbs in 24 hours)
- Concealed capacitive touch controls
- Automatic interior LED lighting

Overall Product Dimensions  
JUW24FRER/LER – 23<sup>7/8</sup>" w x 34<sup>3/8</sup>" h x 26" d\*  
JUW24FREC/LEC – 23<sup>7/8</sup>" w x 34<sup>3/8</sup>" h x 23<sup>7/8</sup>" d†

Overall Product Dimensions  
JIM158XYR – 14<sup>7/8</sup>" w x 33<sup>3/4</sup>" h x 26" d\*  
JIM159XYR – 14<sup>7/8</sup>" w x 33<sup>3/4</sup>" h x 26" d\*  
JIM158XYC – 14<sup>7/8</sup>" w x 33<sup>3/4</sup>" h x 25" d†  
JIM159XYC – 14<sup>7/8</sup>" w x 33<sup>3/4</sup>" h x 25" d†

Ships as right-hand door swing, but is reversible.



## 24" Beverage Center

### JUB24FRER/JUB24FLER

#### Style Option:




**S** Euro-Style Stainless  
(Available with Black Cabinet)

**Accessory Handles (for S style option):**  
Pro-Style® Stainless Handle Kit: W10588599  
Classic Stainless Tubular Handle Kit: W10701399

### JUB24FREC/JUB24FLEC

#### Style Option:



**X** Custom Overlay Design  
(Available with Black Cabinet)

**Accessory Handle (for X style option):**  
Euro-Style Stainless Handle Kit: W10334919\*

Requires custom panel and handle, not included. Custom panel and handle must be ordered separately from a cabinet maker or other manufacturer.

- Fully flush, built-in design
- Independent temperature zones
- Light-guided touch controls with temperature presets
- Interior LED marquee lighting with auto light display option
- 14 wine bottle capacity (2 UltraGlide, soft-close racks with beechwood tines)
- Elegance shelving (1 adjustable, 1 fixed)



## Auto Light Option

A proximity sensor in the base grille triggers the LED lights to automatically ramp up when motion is detected. This allows you to locate specific bottles before you open the door, minimizing the time the door needs to stay open which can affect temperature.



## Under Counter Refrigeration to the Max

When in a hurry or getting ready for entertaining, discerning customers know Jenn-Air brand specializes in helping them keep cool about the details. With the Max Ice option selected, the ice machine can produce up to 50 pounds of clear ice in 24 hours.

\* Depth includes handles. † Depth does not include custom panels and/or handles.

\* Depth includes handles. † Depth does not include custom panels and/or handles. The ice machine does not install entirely flush to cabinetry.



## Pro-Style® Stainless Handle Kit\*

**W10588599**

- Pro-Style® Stainless handle with diamond-etched grip available to replace pre-installed Euro-Style Stainless handle on double drawer refrigerators, under counter refrigerators, wine cellars and beverage centers



## EveryDrop™ Water Filter Replacement Cartridge

**EDR6D1**

- For use with refrigerator/freezer drawers
- Replace every 6 months for optimal performance



## Pro-Style® Stainless Handle Kit

**W10591217**

- Pro-Style® Stainless handle with diamond-etched grip available to replace pre-installed Euro-Style Stainless handle on ice machines



## EveryDrop™ Water Filter Cartridge

**F2WC9I1**

- For use with ice machine
- Replace every 9 months for optimal performance



## Euro-Style Stainless Handle Kit\*

**W10334919**

- Euro-Style Stainless handle available for custom wood panel applications on double drawer refrigerators, under counter refrigerators, wine cellars and beverage centers



## Classic Stainless Tubular Handle Kit\*

**W10701399**

- Classic stainless tubular handle available to replace pre-installed Euro-Style Stainless handle on double drawer refrigerators, under counter refrigerators, wine cellars and beverage centers

\* Two kits are required for refrigerator/freezer drawers and double-refrigerator drawers.



## Drawer Refrigeration

MODEL #	REFRIGERATOR/FREEZER		DOUBLE-REFRIGERATOR	
	JUD24FCER	JUD24FCEC	JUD24FRER	JUD24FREC
Overall Product Dimensions – w x h x d (in) <sup>a</sup>	23 <sup>7/8</sup> x 34 <sup>1/8</sup> x 26	23 <sup>7/8</sup> x 34 <sup>1/8</sup> x 23 <sup>7/8</sup>	23 <sup>7/8</sup> x 34 <sup>1/8</sup> x 26	23 <sup>7/8</sup> x 34 <sup>1/8</sup> x 23 <sup>7/8</sup>
Opening/Clearance Dimensions – w x h x d (in)	24 x 34 <sup>3/8</sup> x 24	24 x 34 <sup>3/8</sup> x 24	24 x 34 <sup>3/8</sup> x 24	24 x 34 <sup>3/8</sup> x 24
Approximate Shipping Weight (lb)	158	146	148	137
Volts/Amps Required	115/15-20	115/15-20	115/15-20	115/15-20
<b>SPECIFICATIONS</b>				
Upper Drawer Volume (cu. ft. AHAM)	2.2	2.2	2.2	2.2
Lower Drawer Volume (cu. ft. AHAM)	2.5	2.5	2.5	2.5
Temperature Range – Upper Drawer	32°–42°F	32°–42°F	32°–42°F	32°–42°F
Temperature Range – Lower Drawer	-8°–+6°F	-8°–+6°F	32°–42°F	32°–42°F
Kilowatt Hours per Year (kWh)	499	499	301	301
<b>REFRIGERATION FEATURES</b>				
Automatic Defrost	■	■	■	■
Automatic Ice Maker	■	■	—	—
Metal Interior	■	■	■	■
Fully Extendable, Soft, Auto-Close Drawers	■	■	■	■
Drawer Dividers	■	■	■	■
Full-Width Drawer Mat (each drawer)	Gray	Gray	Gray	Gray
Automatic Interior LED Lighting	■	■	■	■
<b>CONTROL FEATURES</b>				
Temperature Presets	4 in each drawer	4 in each drawer	4 in each drawer	4 in each drawer
Light-Guided Touch Controls	■	■	■	■
Max Cool Option	■	■	■	■
LED Temperature Display <sup>b</sup>	■	■	■	■
Over Temperature Alarm	■	■	■	■
Drawer Open Alarm	■	■	■	■
Sabbath Mode	■	■	■	■
<b>DESIGN FEATURES</b>				
Water Filter with Replace/Order Filter Indicators	■	■	—	—
4 Adjustable Levelers	■	■	■	■
Fully Flush, Built-In Design	■	■	■	■
Style Options (add letter to end of model number)				
Euro-Style Stainless with Black Cabinet <sup>c</sup>	S	—	S	—
Custom Overlay Design with Black Cabinet <sup>d</sup>	—	X	—	X
<b>OPTIONAL ACCESSORIES</b>				
Pro-Style <sup>®</sup> Stainless Handle Kit (includes one Pro-Style <sup>®</sup> stainless steel handle with diamond-etched grip – 2 kits required)	W10588599	—	W10588599	—
Euro-Style Stainless Handle Kit (includes one Euro-Style stainless steel handle – 2 kits required)	—	W10334919	—	W10334919
Classic Stainless Tubular Handle Kit (2 kits required)	W10701399	—	W10701399	—
EveryDrop <sup>™</sup> Filter by Whirlpool Water (Replacement Filter Cartridge)	EDR6D1	EDR6D1	—	—

A. Depth includes handles. Depth on models JUD24FCECX and JUD24FRECX does not include custom panels and handles.

B. Refrigerator/freezer drawer models feature two temperature displays. Double-refrigerator drawer models feature one temperature display.

C. Includes slightly curved, stainless steel handles.

D. Requires custom panels and handles, not included.

## Under Counter Refrigeration

MODEL #	SOLID DOOR REFRIGERATORS		GLASS DOOR REFRIGERATORS	
	JUR24FRER/ JUR24FLER	JUR24FREC/ JUR24FLEC	JUG24FRER/ JUG24FLER	JUG24FREC/ JUG24FLEC
Overall Product Dimensions – w x h x d (in) <sup>a</sup>	23 <sup>7/8</sup> x 34 <sup>3/8</sup> x 26	23 <sup>7/8</sup> x 34 <sup>3/8</sup> x 23 <sup>7/8</sup>	23 <sup>7/8</sup> x 34 <sup>3/8</sup> x 26	23 <sup>7/8</sup> x 34 <sup>3/8</sup> x 23 <sup>7/8</sup>
Opening/Clearance Dimensions – w x h x d (in)	24 x 34 <sup>3/8</sup> x 24	24 x 34 <sup>3/8</sup> x 24	24 x 34 <sup>3/8</sup> x 24	24 x 34 <sup>3/8</sup> x 24
Approximate Shipping Weight (lb)	148	144	148	144
Volts/Amps Required	115/15-20	115/15-20	115/15-20	115/15-20
<b>SPECIFICATIONS</b>				
Total Volume (cu. ft. AHAM)	4.9	4.9	5.0	5.0
Kilowatt Hours per Year (kWh)	303	303	305	305
<b>REFRIGERATION FEATURES</b>				
Automatic Defrost	■	■	■	■
Automatic Interior LED Lighting	■	■	■	■
Auto Light Option	—	—	■	■
Elegance Shelving, Adjustable Shelves	2	2	2	2
Elegance Shelving, Fixed Shelves	1	1	1	1
Full-Width Door Bins (removable)	2	2	—	—
Soft, Auto-Close Door	■	■	■	■
<b>CONTROL FEATURES</b>				
Light-Guided Touch Controls	■	■	■	■
Temperature Presets	4 (Produce, Beverage, Assorted, Meat)	4 (Produce, Beverage, Assorted, Meat)	4 (Produce, Beverage, Assorted, Meat)	4 (Produce, Beverage, Assorted, Meat)
Max Cool Option	■	■	■	■
Over Temperature Alarm	■	■	■	■
Door Open Alarm	■	■	■	■
Sabbath Mode	■	■	■	■
Control Lock	■	■	■	■
<b>DESIGN FEATURES</b>				
Door Swing Right-Hand		JUR24FRER	JUR24FREC	JUG24FRER
Left-Hand		JUR24FLER	JUR24FLEC	JUG24FLER
UV-Resistant Thermal Glass Door	—	—	■	■
Fully Flush, Built-In Design	■	■	■	■
4 Adjustable Levelers	■	■	■	■
Style Options (add letter to end of model number) Euro-Style Stainless with Black Cabinet <sup>c</sup>	S	—	S	—
Custom Overlay Design with Black Cabinet <sup>d</sup>	—	X	—	X
<b>OPTIONAL ACCESSORIES</b>				
Pro-Style <sup>®</sup> Stainless Handle Kit (includes one Pro-Style <sup>®</sup> stainless steel handle with diamond-etched grip)	W10588599	—	W10588599	—
Euro-Style Stainless Handle Kit (includes one Euro-Style stainless steel handle)	—	W10334919	—	W10334919
Classic Stainless Tubular Handle Kit	W10701399	—	W10701399	—

A. Depth includes handles. Depth on models JUR24FR/LECX and JUG24FR/LECX does not include custom panels and handle.

B. Includes slightly curved, stainless steel handle.

C. Requires custom panel and handle, not included.

## Under Counter Wine Cellars and Beverage Centers

		WINE CELLARS		BEVERAGE CENTERS	
MODEL #	JUW24FRER/ JUW24FLER	JUW24FREC/ JUW24FLEC	JUB24FRER/ JUB24FLER	JUB24FREC/ JUB24FLEC	
Overall Product Dimensions – w x h x d (in) <sup>a</sup>	23 <sup>7/8</sup> x 34 <sup>3/8</sup> x 26	23 <sup>7/8</sup> x 34 <sup>3/8</sup> x 23 <sup>7/8</sup>	23 <sup>7/8</sup> x 34 <sup>3/8</sup> x 26	23 <sup>7/8</sup> x 34 <sup>3/8</sup> x 23 <sup>7/8</sup>	
Opening/Clearance Dimensions – w x h x d (in)	24 x 34 <sup>3/8</sup> x 24	24 x 34 <sup>3/8</sup> x 24	24 x 34 <sup>3/8</sup> x 24	24 x 34 <sup>3/8</sup> x 24	
Approximate Shipping Weight (lb)	220	196	148	144	
Volts/Amps Required	115/15-20	115/15-20	115/15-20	115/15-20	
SPECIFICATIONS					
Total Volume (cu. ft. AHAM)	N/A (up to 46 wine bottles)	N/A (up to 46 wine bottles)	4.7 (up to 14 wine bottles)	4.7 (up to 14 wine bottles)	
Kilowatt Hours per Year <sup>b</sup>	426	426	302	302	
Independent Temperature Zones	■	■	■	■	
Temperature Range – Upper Zone	42°–54°F	42°–54°F	33°–40°F	33°–40°F	
Temperature Range – Lower Zone	42°–64°F	42°–64°F	42°–64°F	42°–64°F	
REFRIGERATION FEATURES					
Automatic Defrost	■	■	■	■	
Automatic Interior LED Lighting	—	—	■	■	
Automatic Interior LED Marquee Lighting	■	■	—	—	
Auto Light Option	■	■	■	■	
Elegance Shelving, Adjustable Shelves	—	—	1	1	
Elegance Shelving, Fixed Shelves	—	—	1	1	
UltraGlide Soft-Close Racks with Beechwood Tines	5 twisted, 1 straight	5 twisted, 1 straight	1 twisted, 1 straight	1 twisted, 1 straight	
Soft, Auto-Close Door	■	■	■	■	
CONTROL FEATURES					
Light-Guided Touch Controls	■	■	■	■	
Temperature Presets	4 in each zone	4 in each zone	2 in upper, 4 in lower	2 in upper, 4 in lower	
Sabbath Mode	■	■	■	■	
Over Temperature Alarm	■	■	■	■	
Door Open Alarm	■	■	■	■	
Control Lock	■	■	■	■	
DESIGN FEATURES					
Door Swing Right-Hand	JUW24FRER	JUW24FREC	JUB24FRER	JUB24FREC	
Left-Hand	JUW24FLER	JUW24FLEC	JUB24FLER	JUB24FLEC	
UV-Resistant Thermal Glass Door	■	■	■	■	
Fully Flush, Built-In Design	■	■	■	■	
4 Adjustable Levelers	■	■	■	■	
Style Options (add letter to end of model number) Euro-Style Stainless with Black Cabinet <sup>c</sup>	S	—	S	—	
Custom Overlay Design with Black Cabinet <sup>d</sup>	—	X	—	X	
OPTIONAL ACCESSORIES					
Pro-Style® Stainless Handle Kit (includes one Pro-Style® stainless steel handle with diamond-etched grip)	W10588599	—	W10588599	—	
Euro-Style Stainless Handle Kit (includes one Euro-Style stainless steel handle)	—	W10334919	—	W10334919	
Classic Stainless Tubular Handle Kit	W10701399	—	W10701399	—	

A. Depth includes handles. Depth on models JUW24FR/LECX and JUB24FR/LECX does not include custom panels and handle.

B. Energy rating applicable in Canada only.

C. Includes slightly curved, stainless steel handle.

D. Requires custom panel and handle, not included.

## Under Counter Ice Machines

ICE MACHINES				
MODEL #	JIM158XYR	JIM159XYR	JIM158XYC	JIM159XYC
Overall Product Dimensions – w x h x d (in) <sup>a</sup>	14 <sup>7/8</sup> x 33 <sup>3/4</sup> x 26	14 <sup>7/8</sup> x 33 <sup>3/4</sup> x 26	14 <sup>7/8</sup> x 33 <sup>3/4</sup> x 25	14 <sup>7/8</sup> x 33 <sup>3/4</sup> x 25
Opening/Clearance Dimensions – w x h x d (in)	15 <sup>3/4</sup> x 34 x 24			
Approximate Shipping Weight (lb)	100	100	95	95
Volts/Amps Required	115/15-20	115/15-20	115/15-20	115/15-20
SPECIFICATIONS				
Storage Capacity (lb)	25	25	25	25
Clear Ice Production Rate (lb/24 hours) with Max Ice	Up to 50	Up to 50	Up to 50	Up to 50
ICE MACHINE FEATURES				
Auto Shut-Off Feature	■	■	■	■
Automatic Interior LED Lighting	■	■	■	■
Frost-Free Operation	■	■	■	■
Ice Scoop	■	■	■	■
Gravity Drain	■	■	■	■
CONTROL FEATURES				
Alert Chimes	■	■	■	■
Concealed Capacitive Touch Controls	■	■	■	■
Clean Cycle Indicator	■	■	■	■
Replace Water Filter Indicator	■	■	■	■
Door Open Alarm	■	■	■	■
Max Ice Option	■	■	■	■
DESIGN FEATURES				
Door Swing Right-Hand	■ <sup>b</sup>	■ <sup>b</sup>	■ <sup>b</sup>	■ <sup>b</sup>
Left-Hand	Reversible <sup>b</sup>	Reversible <sup>b</sup>	Reversible <sup>b</sup>	Reversible <sup>b</sup>
4 Adjustable Levelers	■	■	■	■
Style Options (add letter to end of model number) Euro-Style Stainless with Black Cabinet <sup>c</sup>	S	S	—	—
Custom Overlay Design with Black Cabinet <sup>d</sup>	—	—	X	X
OPTIONAL ACCESSORIES				
Pro-Style® Stainless Handle Kit (includes one Pro-Style® stainless steel handle with diamond-etched grip)	W10591217	W10591217	—	—
EveryDrop™ Filter by Whirlpool Water	F2WC9I1	F2WC9I1	F2WC9I1	F2WC9I1
Drain Pump	1901A	Included	1901A	Included
Cleaning Kit	4396808	4396808	4396808	4396808
Insulated Tube Kit	W10365792	W10365792	W10365792	W10365792
7' Industrial Grade Refrigerator Water Hose	W10505928RP	W10505928RP	W10505928RP	W10505928RP

A. Depth includes handles. Depth on model JIM158XYC does not include custom panels and/or handle. The ice machine does not install entirely flush with cabinetry.

B. Ships as a right-hand door swing, but is reversible.

C. Includes slightly curved, stainless steel handle.

D. Requires custom panel and handle, not included.

## DISHWASHERS

### GLEAMING RESULTS

With a Jenn-Air® dishwasher, hosts have the flexibility to accommodate a variety of dishwasher loads, from the largest pots and platters to the most delicate stemware and china. Our sleek line of dishwashers includes a model that delivers perfect alignment with adjacent cabinetry, including popular frameless, European-style cabinets.



**Fully integrated touch controls** are the first thing seen when the dishwasher is opened, but are concealed while the appliance is closed, creating a clean exterior with the surrounding cabinetry.



And, operating at as low as 40 decibels, Jenn-Air® dishwashers afford homeowners the luxury to read a book in near silence or chat with guests during dinner with virtually no hint that the appliance is running.

This quiet operation is partially enabled by the **TriFecta™ wash system**, which also delivers brilliant cleaning and water and energy reduction. After the wash cycle is complete, dishes may be dried with one of two active drying methods: **Precision Dry®** or **Precision Dry® Plus**. These methods help dishes fully dry by the end of the cycle to avoid unsightly water spots.



## SteamFinish Option

The SteamFinish option, featured on the JDB9800CW and JDB9200CW, helps avoid the water spot faux pas. A mist of steam before the final rinse helps enhance shine and finish on glassware, while reducing water spots.

The SteamFinish option provides outstanding results for tumblers, glass dishware and stemware during Sensor Wash, Cookware/Bakeware and Normal Tableware cycles.



### TriFecta™ Dishwasher

#### JDB9800CW – 24"

##### Style Options:



**P** Pro-Style®  
Stainless



**S** Euro-Style®  
Stainless

##### Accessory Handle (for P and S style options):

Classic Stainless Tubular Handle Kit: W10701399



**X** Custom  
Overlay  
Design

Requires custom panel and handle, not included. Custom panel and handle must be ordered separately from a cabinet maker or other manufacturer.

##### Accessory Handles (for X style option):

Euro-Style Stainless Handle Kit: W10334919

- TriFecta™ wash system
- 40 dBA\*\* quiet system
- Upper and lower Obsidian-colored racks with UltraGlide rails
- Multi-Point LED theater lighting
- Built-in water softener
- Removable 3rd level rack with RollerGlide™ Rails
- Precision Dry® Plus option

Overall Product Dimensions  
23<sup>3</sup>/<sub>4</sub>" w x 33<sup>7</sup>/<sub>8</sub>" h x 26<sup>7</sup>/<sub>8</sub>" d\*



### TriFecta™ Dishwasher

#### JDB9000CW – 24"

##### Style Options:



**P** Pro-Style®  
Stainless



**S** Euro-Style®  
Stainless

##### Accessory Handle (for P, S and B style options):

Classic Stainless Tubular Handle Kit: W10701399



**B** Black

Requires custom panel and handle, not included. Custom panel and handle must be ordered separately from a cabinet maker or other manufacturer.

##### TriFecta™ wash system

##### 46 dBA\*\* quiet system

##### Upper and lower Obsidian-colored racks (upper with UltraGlide rails)

##### Metal interior accents

##### Precision Dry® option

Overall Product Dimensions  
23<sup>3</sup>/<sub>4</sub>" w x 33<sup>7</sup>/<sub>8</sub>" h x 26<sup>7</sup>/<sub>8</sub>" d\*



## Water Softener

The built-in water softener, featured on models JDB9800CW and JDB9600CW helps condition water to enhance cleaning performance, reducing spots and water marks on dishes and glasses.



### TriFecta™ Dishwasher

#### JDB9200CW – 24"

##### Style Options:



**P** Pro-Style®  
Stainless



**S** Euro-Style®  
Stainless

##### Accessory Handle (for P and S style options):

Classic Stainless Tubular Handle Kit: W10701399



**Y** Black  
floating  
Glass



**X** Custom  
Overlay  
Design

Requires custom panel and handle, not included. Custom panel and handle must be ordered separately from a cabinet maker or other manufacturer.

##### Accessory Handles (for X style option):

Euro-Style Stainless Handle Kit: W10334919

- TriFecta™ wash system
- 42 dBA\*\* quiet system
- Upper and lower Obsidian-colored racks with UltraGlide rails
- Multi-Point LED theater lighting
- Precision Dry® option

Overall Product Dimensions  
23<sup>3</sup>/<sub>4</sub>" w x 33<sup>7</sup>/<sub>8</sub>" h x 26<sup>7</sup>/<sub>8</sub>" d\*



### Flush Dishwasher

#### JDB9600CW – 24"

##### Style Options:



**P** Pro-Style®  
Stainless



**S** Euro-Style®  
Stainless

##### Accessory Handle (for P and S style options):

Classic Stainless Tubular Handle Kit: W10701399



**X** Custom  
Overlay  
Design

Requires custom panel and handle, not included. Custom panel and handle must be ordered separately from a cabinet maker or other manufacturer.

##### TriFecta™ wash system

##### 44 dBA\*\* quiet system

##### Upper rack with UltraGlide rails

##### Built-in water softener

##### Removable 3rd level rack with RollerGlide™ rails

##### Cycle status indicator (light beam on floor)

##### Flush installation

Overall Product Dimensions  
23<sup>9</sup>/<sub>16</sub>" w x 34<sup>1</sup>/<sub>16</sub>" h x 24<sup>9</sup>/<sub>16</sub>" d\*

\*Depth includes handles. \*\*Per IEC standards, normal cycle.

\*Depth includes handles. \*\*Per IEC standards, normal cycle.

## Dishwashers

MODEL #	JDB9800CW	JDB9200CW	JDB9000CW
Overall Product Dimensions – w x h x d (in) <sup>a</sup>	23 <sup>3</sup> / <sub>4</sub> x 33 <sup>7</sup> / <sub>8</sub> x 26 <sup>7</sup> / <sub>8</sub>	23 <sup>3</sup> / <sub>4</sub> x 33 <sup>7</sup> / <sub>8</sub> x 26 <sup>7</sup> / <sub>8</sub>	23 <sup>3</sup> / <sub>4</sub> x 33 <sup>7</sup> / <sub>8</sub> x 26 <sup>7</sup> / <sub>8</sub>
Opening/Clearance Dimensions – w x h x d (in)	24 x 33 <sup>7</sup> / <sub>8</sub> x 24	24 x 33 <sup>7</sup> / <sub>8</sub> x 24	24 x 33 <sup>7</sup> / <sub>8</sub> x 24
Approximate Shipping Weight (lb)	95	95	95
Volts/Amps Required	120/15–20	120/15–20	120/15–20
Kilowatt Hours per Year	270	270	270
<b>PERFORMANCE FEATURES</b>			
TriFecta™ Wash System with Pressure-Enhancing Wash Arms	■	■	■
Three-Stage Filtration	■	■	■
Built-In Water Softener	■	—	—
Quiet System	40 dBA <sup>b</sup>	42 dBA <sup>b</sup>	46 dBA <sup>b</sup>
Sensor Fill System	■	■	■
WaterLock™ Flood Protection Technology	■	■	■
Dual-Wattage Heating Element	— with fan assist	■	■
ENERGY STAR® Qualified <sup>c</sup>	■	■	■
<b>CYCLES AND OPTIONS</b>			
Sensor Wash Cycle with ClearScan™ Turbidity Sensor	■	■	■
Cookware/Bakeware Cycle	■	■	■
Normal Tableware Cycle	■	■	■
China/Crystal Cycle	■	■	■
1-Hour Wash Cycle	■	■	■
Refresh/Rinse Cycle	■	■	■
Hi-Temp Wash Option	■	■	■
Top Rack Wash Option	■	—	—
Sani Rinse Option	■	■	■
SteamFinish Option	■	■	—
4-Hour Delay Start Option	■	■	■
Precision Dry® Option	Plus	■	■
Control Lock Option	—	■	■
<b>RACK FEATURES</b>			
Obsidian-Colored Racks with Premium Upper Rack Adjusters	■	■	■
UltraGlide Rails	U/L	U/L	U
Folding Tines	U/L	U/L	U/L
Sliding Tines	■	■	—
Wire Cup Shelves with Integrated Stemware Holders	2 U/ 1 L	1 U	1 U
Stemware Clips	—	4	4
Light Item Clips (Repositionable)	6 U	4 U	4 U
Small Item Basket	■	■	—
Culinary Caddy	■	■	—
Silverware Basket with Sliding Covers	■	■	■
Removable 3rd Level Rack with RollerGlide™ Rails	■	—	—
<b>OPTIONAL ACCESSORIES</b>			
Classic Tubular Stainless Steel Handle Kit <sup>d</sup>	W10701399	W10701399	W10701399
Euro-Style Stainless Steel Handle Kit <sup>e</sup>	W10334919	W10334919	—
Soft Spring™ Dishwasher Salt	W10320829	—	—
Rack Loading Accessories	DISHEXTEND, DISHBABY	DISHEXTEND, DISHBABY	DISHEXTEND, DISHBABY
<b>DESIGN FEATURES</b>			
Stainless Steel Tall Tub with Interior Metal Accents	■	■	■
Multi-Point LED Theater Lighting	■	■	—
Capacity (Place Settings)	16	14	14
Status Lights with Exterior Cycle Indicator <sup>f</sup>	■	■	■
Fully Integrated Console with Capacitive Touch Controls	■	■	■
Style Options (add letter to end of model number) <sup>g</sup>	P, S, X	P, S, Y, X	P, S, B

U = Upper Rack, L = Lower Rack.

A. Depth includes handle.

B. Per IEC standards, normal cycle.

C. Per ENERGY STAR® specifications, effective 1/29/2016.

©ENERGY STAR is a U.S. registered mark.

D. Handle kits available only for Pro-Style® (P), Euro-Style (S) and Black (B) models.

E. Handle kits available only for Custom Overlay Design (X) models.

F. Excludes Custom Overlay Design (X) and Black Floating Glass (Y) models.

G. P = Pro-Style® Design includes stainless steel handle with diamond-etched grip; S = Euro-Style Stainless

Design includes slightly curved, stainless steel handle; Y = Black Floating Glass Design includes slightly curved, black handle; B = Black Design includes slightly curved, black handle; X = Custom Overlay Design requires custom panel and handle, not included.

## Dishwashers

MODEL #	JDB9600CW
Overall Product Dimensions – w x h x d (in) <sup>a</sup>	23 <sup>9</sup> / <sub>16</sub> x 34 <sup>1</sup> / <sub>16</sub> x 24 <sup>9</sup> / <sub>16</sub>
Opening/Clearance Dimensions – w x h x d (in)	24 x 34 <sup>1</sup> / <sub>16</sub> x 24
Approximate Shipping Weight (lb)	106
Volts/Amps Required	120/15–20
Kilowatt Hours per Year	279
<b>PERFORMANCE FEATURES</b>	
TriFecta™ Wash System with Pressure-Enhancing Wash Arms	■
Three-Stage Filtration	■
Extra-Tall-Item Sprinkler Head	■
Built-In Water Softener	■
Quiet System	44 dBA <sup>b</sup>
Sensor Fill System	■
WaterLock™ Plus Flood Protection Technology	■
ENERGY STAR® Qualified <sup>c</sup>	■
<b>CYCLES AND OPTIONS</b>	
Sensor Wash Cycle with ClearScan™ Turbidity Sensor	■
Heavy Wash Cycle	■
Normal Wash Cycle	■
30-Minute Wash Cycle	■
Partial Load Option	■
Sanitize Option	■
Extra Wash Option	■
Extra Dry Option	■
1 to 24-Hour Delay Start Option	■
<b>RACK FEATURES</b>	
Custom Upper Racking System with Premium Adjusters	■
UltraGlide Rails	U
Folding Tines	U/L
Cup Shelves with Integrated Stemware Holders	2 U
Multi-Position Silverware Basket with Covers	■
Removable 3rd Level Rack with RollerGlide™ Rails	■
Detergent Tab Tray	U
<b>OPTIONAL ACCESSORIES</b>	
Classic Tubular Stainless Steel Handle <sup>c</sup>	W10701399
Euro-Style Stainless Steel Handle Kit <sup>b</sup>	W10334919
Pro-Style® Stainless Steel Handle Kit <sup>b</sup>	W10529221A
Drain Hose Extension Kit	W10712310
Fine Silverware Carafe	W10712311
Utensil Caddy	W10712312
Vase/Bottle Holder	W10712313
Soft Spring™ Dishwasher Salt	W10320829
<b>DESIGN FEATURES</b>	
Stainless Steel Tall Tub	■
Capacity (Place Settings)	13
Exterior Cycle Indicator	Beam on floor
Fully Integrated Console with Push-Button Controls and LED Display	■
Flush Installation	■
Style Options (add letter to end of model number) <sup>g</sup>	P, S, X

U = Upper Rack, L = Lower Rack.

A. Depth includes handle.

B. Per IEC standards, normal cycle.

C. Handle kits available only for Pro-Style® (P) and Euro-Style (S) models.

D. Handle kits available only for Custom Overlay Design (X) models.

E. P = Pro-Style® Design includes stainless steel handle with diamond-etched grip;

S = Euro-Style Stainless Design includes slightly curved, stainless steel handle;

X = Custom Overlay Design requires custom panel and handle, not included.

## ✓ COMPACTORS

### ELEGANT, DISCREET CLEANUP

Beautifully complement the décor of your kitchen. Jenn-Air® compactors are available in a variety of style options. Choose from the attractive Euro-Style Stainless model with an elegantly-curved handle, or a Pro-Style® Stainless panel kit with a diamond-etched handle. A Custom Overlay Design option is also available, which lets your compactor blend with your cabinetry for a seamless, integrated look.

How can you make a night of entertaining a little easier?

Let a Jenn-Air® compactor assist your cleanup efforts by **reducing your trash volume up to 80 percent.\***

When you select the **Compress option**, 2,300 pounds of continuous pressure is applied to the contents, discreetly eliminating messes and ensuring contents stay compressed.

\* When Compress option is selected.



Because you and your guests expect a fresh and clean kitchen environment, all compactors feature an **odor-control fan and charcoal filter** to help remove any stubborn, unwanted odors in the air.

Your hands are full during dinner-party cleanup, so your Jenn-Air® compactor gives you a **full-width foot pedal** that lets you open and start it quickly and easily with minimal use of your hands.

## Compactors



## 15" Compactor

**TC707 – 15"****Style Option:**

- Compress option
- 5:1 compaction ratio\*
- Anti-jam and tilt sensors
- Fully integrated console

Overall Product Dimensions  
15" w x 34<sup>1</sup>/<sub>8</sub>" h x 26<sup>1</sup>/<sub>4</sub>" d



## 15" Compactor Base Unit

**TC607 – 15"****Style Option:**

- Compress option
- 5:1 compaction ratio\*
- Anti-jam and tilt sensors
- Fully integrated console

**Custom Overlay Design**

Requires custom overlay panels and handles, not included.

**Coordinating Panel Kits**

Customize your compactor to match our Pro-Style® Stainless kitchen suite design with a coordinating panel kit. To do so, you must order one compactor base unit TC607X and the Pro-Style® Stainless panel kits.

Overall Product Dimensions  
15" w x 34<sup>1</sup>/<sub>8</sub>" h x 23<sup>7</sup>/<sub>8</sub>" d\*\*



## Pro-Style® Stainless Panel Kit

**W10197421**

- Must also order compactor base unit TC607X
- Coordinates with Pro-Style® Stainless appliances
- Includes compactor door panel and handle

\* With Compress option selected. \*\* Depth does not include panel kit or custom panel and handle.

MODEL #	TC707	TC607
Overall Product Dimensions – w x h x d (in) <sup>a</sup>	15 x 34 <sup>1</sup> / <sub>8</sub> x 26 <sup>1</sup> / <sub>4</sub>	15 x 34 <sup>1</sup> / <sub>8</sub> x 23 <sup>7</sup> / <sub>8</sub>
Opening/Clearance Dimensions – w x h x d (in)	15 <sup>1</sup> / <sub>4</sub> x 34 <sup>1</sup> / <sub>4</sub> x 24	15 <sup>1</sup> / <sub>4</sub> x 34 <sup>1</sup> / <sub>4</sub> x 24
Approximate Shipping Weight (lb)	152	152
Volts/Amps Required	120/15–20	120/15–20
<b>COMPACTOR FEATURES</b>		
Drawer Capacity (cu. ft.)	1.4	1.4
Compaction Ratio <sup>b</sup>	5:1	5:1
Fan with Charcoal Filter	■	■
Heavy-Duty Zinc Coated Frame and Drawer	■	■
Heavy-Duty Motor	1/3 HP	1/3 HP
2-Point Drive System	■	■
Power Screw-Driven Compactor Ram	■	■
Front Levelers and Rear Rollers	■	■
Anti-Jam and Tilt Sensors	■	■
Open/Start Pedal	■	■
Sound Insulation	Transmission/Motor/Door	Transmission/Motor
Bag Retainer Buttons	■	■
Compactor Bags Included	2	2
<b>CONTROL FEATURES</b>		
Fully Integrated Console	■	■
Compress Option	■	■
<b>OPTIONAL ACCESSORIES</b>		
Suite-Coordinating Panel Kits (add to base unit TC607X)	—	W10197421
Pro-Style® Stainless	—	W10165295BU
15" White Plastic Compactor Bags – 180 Count	W10165294RB	W10165294RB
15" White Plastic Compactor Bags – 60 Count	W10165295RP	W10165295RP
15" White Plastic Compactor Bags – 15 Count	13030RP	13030RP
15" Compactor Bag Caddy	—	—
<b>DESIGN FEATURES</b>		
Side Release Bin	■	■
Under Counter Installation	■	■
Style Options (add letter to end of model number)	S	—
Euro-Style Stainless <sup>c</sup>	—	X
Custom Overlay Design <sup>d</sup>	—	—

A. Depth includes handles. Depth on model TC607 does not include custom panel and handle.

B. With Compress option selected.

C. Includes slightly curved, stainless steel handle.

D. Requires coordinating panel kit or custom panel and handle, not included.

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to installation instructions packaged with product *before* selecting cabinetry, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

Thank you to those designers and manufacturers who have helped us showcase the versatility of Jenn-Air® appliances.

#### Pro-Style® Stainless Lake Forest

**Cabinetry:** Custom with Mackinaw Doors in Maple Spice (275) by Greenfield Cabinetry  
**Hardware:** Northport Pulls by Schaub and Company  
**Countertop:** Terrastone Bianco Oro Quartz by Distinguished Stone Works  
**Flooring:** AXI Grey Timber (ATL) in Herringbone Pattern by Genesee Tile  
**Backsplash:** Terrastone Bianco Oro Quartz by Distinguished Stone Works  
**Wall Paint:** Pure White (SW 7005) by Sherwin-Williams®  
**Island Cabinetry and Trim Paint:** Pewter Cast (SW 7673) by Sherwin-Williams®

#### Perimeter Cabinetry Paint:

Knitting Needles (SW 7672) by Sherwin-Williams®  
**Door and Window Paint:** Sealskin (SW 7675) by Sherwin-Williams®  
**Island Countertop and Door Frame Wood Stain:** Burnished Walnut (SW 3119-P) by Sherwin-Williams®  
**Ceiling Beam Wood Paint:** Pewter Cast (SW 7673) by Sherwin-Williams®  
**Ceiling:** Solana Beach (240) by Shaw Flooring

**Main Sink:** Blanco Diamond™ SILGRANIT® II Super Single Bowl Undermount in Metallic Gray (441770) by Blanco  
**Island Sink:** Blanco Diamond™ SILGRANIT® II Single Bowl Undermount in Metallic Gray (440176) by Blanco

#### Sink Drains:

Anthracite (441090) by Blanco

**Main Faucet:** TRINSIC® Single Handle Pull-Down in Champagne Bronze™ (9159-CZ-DST) by Delta

**Island Faucet:** TRINSIC® Single Handle Bar/Prep in Champagne Bronze™ (1959LF-CZ) by Delta

**Over-Island Lighting:** Ellis 4 Light Pendant in Brushed Gold (4542BG) by Capital Lighting

**Over-Sink Lighting:** Ellis 2 Light Pendant in Brushed Gold with Frosted Glass (4544BG-579) by Capital Lighting

**Door Hardware:** Orion with Square Knob by Emtek

**Furniture:** Knicker Counter Bar Stools in Gun Metal by Blu Dot

#### Euro-Style Stainless Metropolitan

**Cabinetry:** Quartersawn Cherry in Rye by Kraftmaid®  
**Countertop:** Manhattan Grey by IceStone®  
**Stone Veneer:** Ply Gem

#### Wall and Trim Paint:

Baby's Breath (OC-62) by Benjamin Moore®

**Windows:** Ply Gem®

**Lighting:** Amphora Pendant by Eurway;® Spartan Mini Pendant (2299123) by Access Lighting

**Furniture:** Eames™ Molded Plywood Chairs by Herman Miller;™ Goetz™ Sofa by Herman Miller;™ Eames™ Lounge Chair and Ottoman by Herman Miller;™ Noguchi Table by Herman Miller;™ Viva Stool by LumiSource



#### Euro-Style Stainless San Francisco

**Cabinetry:** Madison in Maple with Cottage White Finish by Medallion®; Madison in Cherry with Peppercorn Finish with Ebony Glaze by Medallion®  
**Hardware:** Dakota Drawer Pulls in Rustic Pewter by Restoration Hardware®  
**Countertop:** Raven (4120) by Caesarstone® with Ogee Edge Detail  
**Flooring:** Sugar Creek Maple in Pewter 3-1/4" (SCM131PWLGY) by Armstrong®  
**Tile Backsplash:** Safari Athens, Polished (AS8743-11) by Ann Sacks®  
**Wall Paint:** Alaskan Skies (972) by Benjamin Moore®

#### Trim Paint:

Chantilly Lace (OC-65) by Benjamin Moore®

**Primary Sink & Faucet:** Harmony (Lustertone) Stainless Steel Double Bowl (ELUH31229RPD) by Elkay®; Harmony Pull-Down Kitchen Faucet (LKHA1031NK) by Elkay®; Harmony Soap/Lotion Dispenser (LKA1054NK) by Elkay®

**Island Sink & Faucet:** Gourmet (Lustertone) Stainless Steel Single Bowl (ELUH2115PD) by Elkay®; Harmony Pull-Down Kitchen Faucet (LKHA1031NK) by Elkay®

**Bar Sink & Faucet:** Harmony (Lustertone) Stainless Steel Double Bowl ELUH31229RPD) by Elkay®; Harmony Pull Out Bar/Prep Faucet (LKA3042NK) by Elkay®

#### Lighting:

E.F. Chapman Darlana 4-Light Lantern in Aged Iron by Visual Comfort

**Window Treatments:** Natural Woven Flat Fold Shades in Delphi/Smoke (15325) by Smith & Noble

**Furniture:** Table: Stack 50 Dining Table (61100163NATL) by Marcello Pozzi for Restoration Hardware®

**Chairs:** Layton Chair in Dusk Rattan (GCHA197DS) by Noir

**Counter Stools:** District 8 Design in Weathered Oak (V19C) by Wayfair®

**Style Accents & Inspiration:** Courtesy of the private collection of Matthew Patrick Smyth

#### Pro-Style® Stainless Contemporary

**Cabinetry:** Devonshire by Medallion®  
**Countertop:** Granite in Kashmir White by Living Elements™ Inc.; Island Butcher Block in Texas Mesquite by Living Elements™ Inc.

**Flooring:** Stone Tile (V56299501-G-V112-1) by Porcelanosa®

#### Tile Backsplash:

Venezia (V56226001) by Porcelanosa®

**Pantry Tile Backsplash:** Silver Folia (S-9058) by Solistone

**Paint:** Pearlescent White-01 by Benjamin Moore®

**Pantry Wallpaper:** Kendall (JW105762) by Shand Kydd

**Island Faucet:** Grace with Side Spray (157-052) by Blanco

**Prep Area Faucet:** Grace (157-056) by Blanco

**Pot Filler:** Deck Mount (157-064) by Blanco

**Kitchen Island Sink:** Blancoarcon Medium Single Bowl (516-094) by Blanco

**Prep Area Sink:** Blancoperfoma Medium Single Bowl (513-642) by Blanco

**Lighting:** 6-Light Pendant (16035-010) by Eurofase®

**Furniture:** Lucia Kitchen Work Table from KitchenLav.com®

#### Euro-Style Stainless Lakefront

**Cabinetry:** Custom  
**Countertop:** IceStone® White Pearl with Bamboo Inlay on Island  
**Flooring:** Custom Stained Concrete  
**Tile Backsplash:** Glass Acero by Porcelanosa®  
**Primary Wall Paint:** Standish White (HC-32) by Benjamin Moore®  
**Wall Paint to Match Tile:** Granite Dust (5006-1C) by Valspar®  
**Trim Paint:** River Rock (2139-10) by Benjamin Moore®  
**Stone:** Eldorado Stone

#### Shelving:

Custom Bamboo

#### Windows:

Custom

#### Sinks and Faucets:

Blanco America

#### Bar stools:

CB2

#### Art Glass:

Bernard Katz (bernardkatz.com)

NOTE: Many of the Jenn-Air® appliances shown are photographed in custom cabinetry to showcase a flush installation. Results may vary based on cabinet choices and kitchen design. Refer to the Installation Instructions or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.



## ✓ PLATINUM WARRANTY




This limited warranty will cover parts and labor to repair or replace, under normal residential use. Individual products may provide additional warranty coverage on specific parts and systems. Warranty terms are subject to change. Visit [jennair.com](http://jennair.com) for the most current warranty details including applicable terms, conditions, and exclusions, or consult the Use & Care Guide provided with your product.

### Warranty Service

Under the limited warranty, when labor is provided, service must be performed by an Authorized Jenn-Air Service Contractor. To obtain service, contact the dealer from whom the unit was purchased, an authorized Service Contractor or Jenn-Air Customer Assistance. In the U.S.A. and Canada, call 1-800-JENN-AIR (1-800-536-6247). Please include model number, serial number and date of original purchase in all correspondence. Service will be provided during normal business hours. This warranty gives you specific rights, and you may also have other rights which vary from state to state or province to province.

### Owner's Responsibilities

The customer has certain responsibilities which must be satisfied to qualify for coverage under these warranties. For all products, the owner is responsible for providing normal care and maintenance in accordance with the Use & Care instructions, providing proof of purchase on request, proper installation and making the appliance reasonably accessible for service.



1-800-JENN-AIR  
1-800-536-6247

©/™ ©2017 Jenn-Air. All rights reserved.  
All other trademarks owned by their respective companies. Specifications subject to change without notice.

 JENN-AIR®

jennair.com

JX160037 9012AdZw417